

|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

**GENERAL**

Series: Domino

Brand: Panzeri

Division: Design

Mounting Type: Portable

Mounting Location: Table

Subcategory: Table

**PHYSICAL**

Shape: Cube

Length (mm): 110

Length (in): 4 <sup>5</sup>/<sub>16</sub>

Width (mm): 80

Width (in): 3 <sup>1</sup>/<sub>8</sub>

Height (mm): 130

Height (in): 5 <sup>1</sup>/<sub>8</sub>

Light Distribution: Omnidirectional

Weight (kg): 1.23

Weight (lbs): 2.7

Diffuser: Matte White Blown Glass

Fixture Finish: Metallic Gray

Fixture Material: Glass / Aluminum

**ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: T4

Bulb Included: Bulb Not Included

Total Output Wattage (W): 3

Max. Wattage Per Lamp (W): 3

Lamp Base: G9

Input Voltage (V): 120

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40



|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

**GENERAL**

Series: Domino

Brand: Panzeri

Division: Design

Mounting Type: Portable

Mounting Location: Table

Subcategory: Table

**PHYSICAL**

Shape: Cube

Length (mm): 110

Length (in): 4 <sup>5</sup>/<sub>16</sub>

Width (mm): 80

Width (in): 3 <sup>1</sup>/<sub>8</sub>

Height (mm): 130

Height (in): 5 <sup>1</sup>/<sub>8</sub>

Light Distribution: Omnidirectional

Weight (kg): 1.23

Weight (lbs): 2.7

Diffuser: Black Blown Glass

Fixture Finish: Metallic Gray

Fixture Material: Glass / Aluminum

**ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: T4

Bulb Included: Bulb Not Included

Total Output Wattage (W): 3

Max. Wattage Per Lamp (W): 3

Lamp Base: G9

Input Voltage (V): 120


**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**


Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

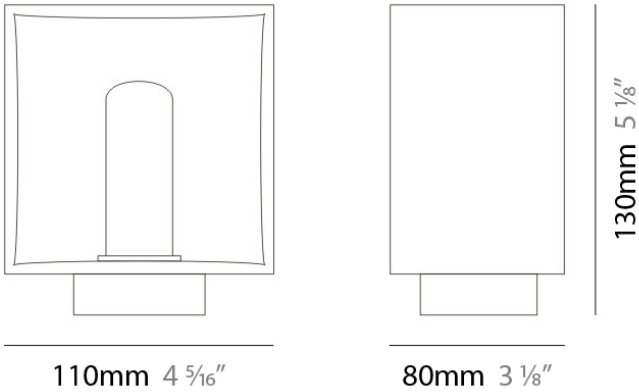

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

|                                                     |
|-----------------------------------------------------|
| GENERAL                                             |
| Series: Domino                                      |
| Brand: Panzeri                                      |
| Division: Design                                    |
| Mounting Type: Portable                             |
| Mounting Location: Floor                            |
| Subcategory: Floor                                  |
| PHYSICAL                                            |
| Shape: Cube                                         |
| Length (mm): 250                                    |
| Length (in): 9 1⁄4                                  |
| Width (mm): 160                                     |
| Width (in): 6 3⁄4                                   |
| Height (mm): 1650                                   |
| Height (in): 65                                     |
| Light Distribution: Omnidirectional                 |
| Weight (kg): 0.5                                    |
| Weight (lbs): 1                                     |
| Diffuser: White & White Blown Glass                 |
| Fixture Finish: Metallic Gray                       |
| Fixture Material: Glass / Aluminum                  |
| ELECTRICAL                                          |
| Number of Lamps: 2                                  |
| Lamp Type: LED Retrofit                             |
| Lamp Shape: T4                                      |
| Bulb Included: Bulb Not Included                    |
| Total Output Wattage (W): 6                         |
| Max. Wattage Per Lamp (W): 3                        |
| Lamp Base: G9                                       |
| Input Voltage (V): 120                              |
| LED                                                 |
| OPTICAL                                             |
| RATINGS AND CERTIFICATIONS                          |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40                                     |

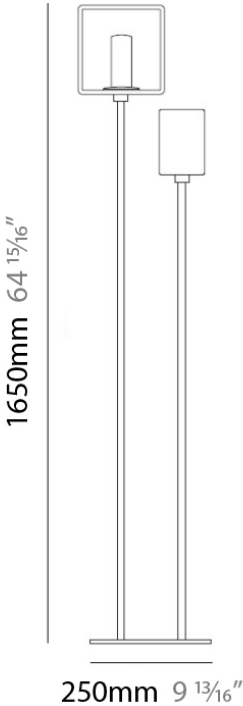


**GENERAL**  
Series: Domino  
Brand: Panzeri  
Division: Design  
Mounting Type: Portable  
Mounting Location: Floor  
Subcategory: Floor

**PHYSICAL**  
Length (mm): 232  
Length (in): 9 1/4  
Width (mm): 165  
Width (in): 6 1/2  
Height (mm): 1650  
Height (in): 65  
Weight (kg): 1.23  
Weight (lbs): 2.7  
Diffuser: Matte White Printed Pyrex  
Fixture Material: Metal











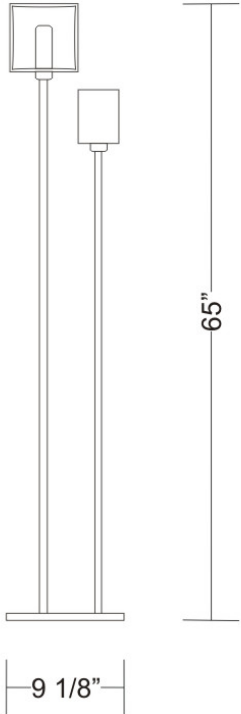


























































**ELECTRICAL**  
Number of Lamps: 2  
Lamp Type: LED Retrofit / Halogen  
Lamp Shape: T10  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 28 / 120  
Max. Wattage Per Lamp (W): 13 / 60  
Lamp Base: G9  
Input Voltage (V): 120

**LED**  
**OPTICAL**  
**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP40

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |



## LEGEND

|                                                                                    |                                                            |                                                                                     |                                                              |                                                                                       |                                                                                                |
|------------------------------------------------------------------------------------|------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
|    | floor-mounted                                              |    | pivotal                                                      |    | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|    | wall and ceiling: recessed and surface mounted             |    | rotating                                                     |    | warm dim / natural dimming LED                                                                 |
|    | ceiling-mounted and wall-mounted                           |    | illuminate tilted                                            |    | rechargeable battery powered                                                                   |
|    | wall-mounted                                               |    | color of suspension cable                                    |    | fixture with natural vivid LED (upon request)                                                  |
|    | omni-directional light distribution                        |    | length of suspension cable                                   |    | color rendering index                                                                          |
|    | direct light distribution                                  |    | reflector degree selection                                   |    | color temperature                                                                              |
|    | direct/indirect light distribution                         |    | super spot                                                   |    | lumen (luminous flux)                                                                          |
|    | indirect light distribution                                |    | lens                                                         |    | efficacy (lumens per watt)                                                                     |
|    | asymmetric light distribution                              |    | lens pack                                                    |    | Unified Glare Rating (UGR) range from 5-40                                                     |
|    | aura light distribution                                    |    | shine ring                                                   |    | marine grade (AISI 316 stainless steel)                                                        |
|    | round wall or ceiling cut-out                              |    | integrated shine ring with diffuser                          |    | walk on                                                                                        |
|    | square wall or ceiling cut-out                             |    | free individual colors 01-29                                 |    | drive on                                                                                       |
|   | the supplied jig specifies the cutout dimensions           |   | individual colors: 00 (free of charge), 01-25 (extra charge) |   | Dark Sky Compliance                                                                            |
|  | minimum distance (meters) lamp - object                    |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth                                             |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion                                                               |
|  | ceiling thickness in mm                                    |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                                |  | luminaire part to be colored (F4)                            |  | acoustic material                                                                              |
|  | dimmmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation                                                      |
|  | included or excluded LED driver/transformer/ control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation                                                     |
|  | separately switchable                                      |  | indirect diffuser                                            |  | ETL Certified to UL and CSA Standards                                                          |
|  | sensor                                                     |  | direct diffuser                                              |  | UL Certified to UL and CSA Standards                                                           |
|  | remote control                                             |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards                                                          |
|  | available upon request                                     |  | accessory                                                    |  | Certified for North American Standards                                                         |

## IP RATING

|                                                                                   |                                                                                                                                                  |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)                                                                           |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water                                                                             |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas                                                      |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods                                        |

## IK RATING

|                                                                                     |                                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |