

D11003

**GENERAL**  
Series: Space  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

**PHYSICAL**  
Shape: Square  
Length (mm): 600  
Length (in): 23 ½  
Width (mm): 600  
Width (in): 23 ½  
Height (mm): 1600  
Height (in): 63  
Light Distribution: Direct  
Weight (kg): 10.6  
Weight (lbs): 23.5  
Diffuser: Satin Glass  
Fixture Finish: ALU  
Fixture Material: Aluminum


**ELECTRICAL**  
Number of Lamps: 1 + 1  
Lamp Type: LED Retrofit / Halogen  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 26 / 185  
Max. Wattage Per Lamp (W): 6 / 35 + 20 / 150  
Lamp Base: G9  
Input Voltage (V): 120

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

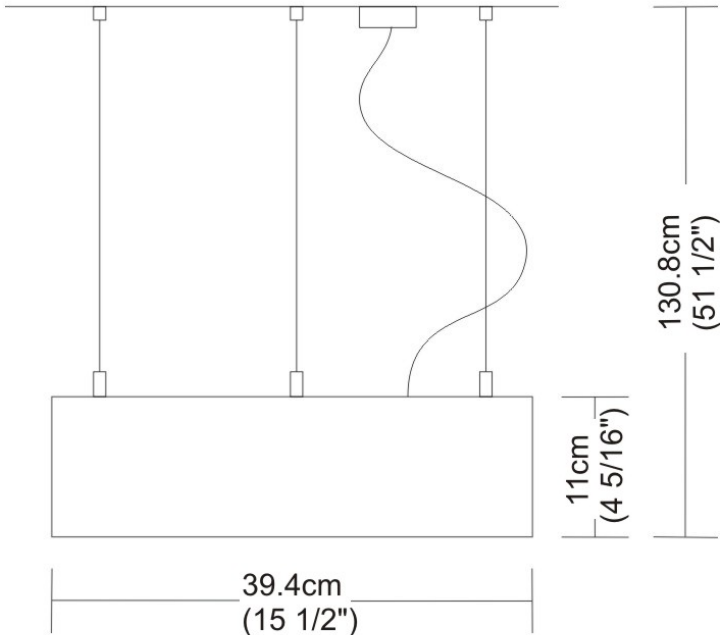


|   |  |
|---|--|
| GENERAL   |  |
| Series: Space                                       |  |
| Brand: Milan  |  |
| Division: Design                                    |  |
| Mounting Type: Suspension                           |  |
| Mounting Location: Ceiling                          |  |
| Subcategory: Pendant                                |  |
| PHYSICAL  |  |
| Shape: Abstract                                     |  |
| Width (mm): 108                                     |  |
| Width (in): 4 ¼                                     |  |
| Height (mm): 730                                    |  |
| Height (in): 28                                     |  |
| Weight (kg): 1.4                                    |  |
| Weight (lbs): 3                                     |  |
| Fixture Finish: Metallic Gray                       |  |
| Fixture Material: Aluminum                          |  |
| ELECTRICAL  |  |
| Number of Lamps: 3                                  |  |
| Lamp Type: LED Retrofit                             |  |
| Lamp Shape: T4                                      |  |
| Bulb Included: Bulb Not Included                    |  |
| Total Output Wattage (W): 9                         |  |
| Max. Wattage Per Lamp (W): 3                        |  |
| Lamp Base: G9                                       |  |
| Input Voltage (V): 120                              |  |
| LED   |  |
| OPTICAL   |  |
| RATINGS AND CERTIFICATIONS                          |  |
| Certified By: CSA Certified to UL and CSA Standards |  |
| IP rating: IP20                                     |  |

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |



108mm 4 ¼"



730mm 28 ¾"

D91123


**GENERAL**  
Series: Space  
Brand: Milan  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

**PHYSICAL**  
Shape: Abstract  
Length (mm): 866  
Length (in): 34 1/4  
Width (mm): 108  
Width (in): 4 1/4  
Height (mm): 1570  
Height (in): 62  
Weight (kg): 2.3  
Weight (lbs): 5  
Fixture Finish: Metallic Gray  
Fixture Material: Aluminum

**ELECTRICAL**  
Number of Lamps: 4  
Lamp Type: LED Retrofit  
Lamp Shape: MR16  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 12  
Max. Wattage Per Lamp (W): 3  
Lamp Base: GU10  
Input Voltage (V): 120

**LED**  
**OPTICAL**  
**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

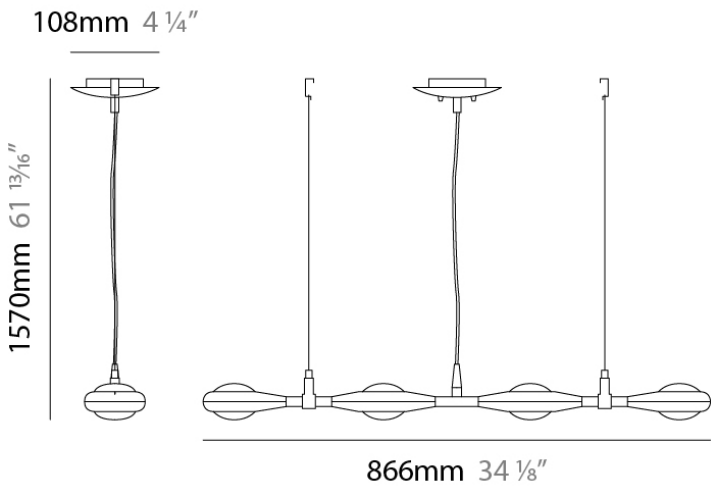

D91124

**GENERAL**  
Series: Space  
Brand: Milan  
Division: Design  
Mounting Type: Suspension  
Mounting Location: Ceiling  
Subcategory: Pendant

**PHYSICAL**  
Shape: Abstract  
Length (mm): 866  
Length (in): 34 1/4  
Width (mm): 108  
Width (in): 4 1/4  
Height (mm): 1570  
Height (in): 62  
Weight (kg): 2.3  
Weight (lbs): 5  
Fixture Finish: Metallic Gray  
Fixture Material: Aluminum

**ELECTRICAL**  
Number of Lamps: 4  
Lamp Type: LED Retrofit  
Lamp Shape: T4  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 12  
Max. Wattage Per Lamp (W): 3  
Lamp Base: G9  
Input Voltage (V): 120

**LED**  
**OPTICAL**  
**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20


PROJECT

TYPE

NOTES

QUANTITY

DATE

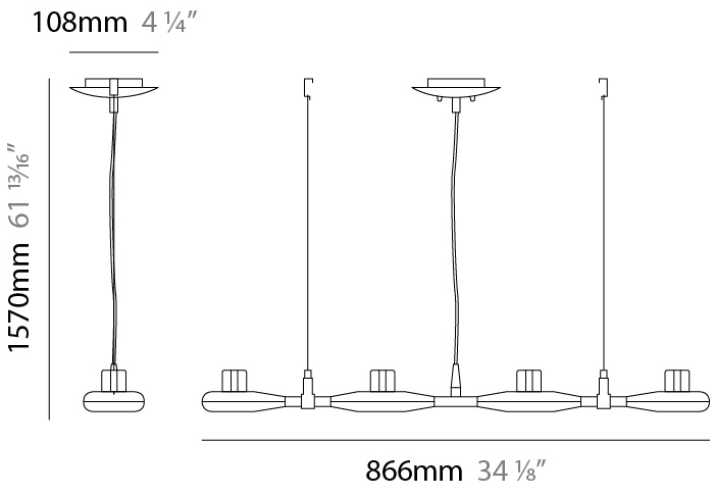

D93050

**GENERAL**  
Series: Space  
Brand: Milan  
Division: Design  
Mounting Type: Surface  
Mounting Location: Wall  
Subcategory: Up/Down Light

**PHYSICAL**  
Shape: Oblong  
Diameter (mm): 108  
Diameter (in): 4 ¼  
Height (mm): 70  
Height (in): 2 ¾  
Extension (mm): 159  
Extension (in): 6 ¼  
Light Distribution: Direct / Indirect  
Weight (kg): 1.4  
Weight (lbs): 3  
Diffuser: Glass sold Separately  
Fixture Finish: Metallic Gray  
Fixture Material: Glass / Aluminum

**ELECTRICAL**  
Number of Lamps: 1  
Lamp Type: LED Retrofit  
Lamp Shape: T4  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 3  
Max. Wattage Per Lamp (W): 3  
Lamp Base: G9  
Input Voltage (V): 120

**LED**  
**OPTICAL**  
**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20


PROJECT

TYPE

NOTES

QUANTITY

DATE

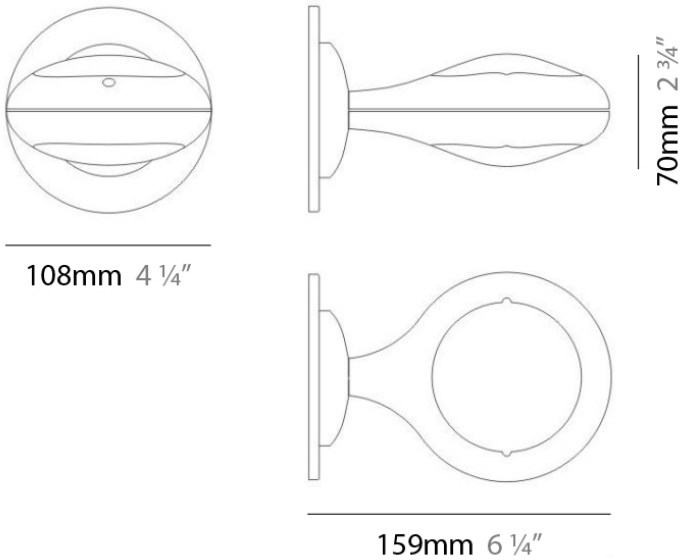

D93051

**GENERAL**  
Series: Space  
Brand: Milan  
Division: Design  
Mounting Type: Surface  
Mounting Location: Wall  
Subcategory: Up/Down Light

**PHYSICAL**  
Shape: Oblong  
Diameter (mm): 108  
Diameter (in): 4 ¼  
Height (mm): 178  
Height (in): 7  
Extension (mm): 178  
Extension (in): 7  
Light Distribution: Direct / Indirect  
Weight (kg): 1.4  
Weight (lbs): 3  
Diffuser: Glass - Sold Separately  
Fixture Finish: Metallic Gray  
Fixture Material: Glass / Aluminum


**ELECTRICAL**  
Number of Lamps: 1  
Lamp Type: LED Retrofit  
Lamp Shape: T4  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 3  
Max. Wattage Per Lamp (W): 3  
Lamp Base: G9  
Input Voltage (V): 120

LED

OPTICAL

**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20


|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

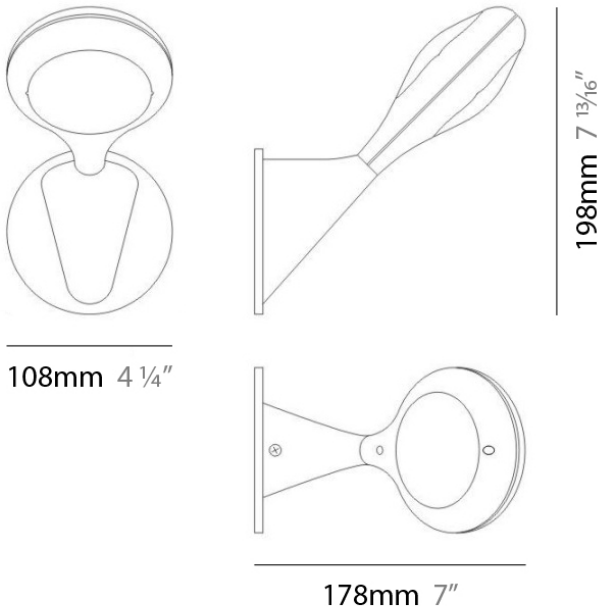

D93052

|   |  |
|---|--|
| GENERAL   |  |
| Series: Space                                       |  |
| Brand: Milan  |  |
| Division: Design                                    |  |
| Mounting Type: Surface                              |  |
| Mounting Location: Wall                             |  |
| Subcategory: Downlight                              |  |
| PHYSICAL  |  |
| Shape: Oblong                                       |  |
| Diameter (mm): 108                                  |  |
| Diameter (in): 4 ¼                                  |  |
| Height (mm): 178                                    |  |
| Height (in): 7                                      |  |
| Extension (mm): 178                                 |  |
| Extension (in): 7                                   |  |
| Light Distribution: Direct                          |  |
| Weight (kg): 1.4                                    |  |
| Weight (lbs): 3                                     |  |
| Diffuser: Glass - Sold Separately                   |  |
| Fixture Finish: Metallic Gray                       |  |
| Fixture Material: Glass / Aluminum                  |  |
| ELECTRICAL  |  |
| Number of Lamps: 1                                  |  |
| Lamp Type: LED Retrofit                             |  |
| Lamp Shape: MR20                                    |  |
| Bulb Included: Bulb Not Included                    |  |
| Total Output Wattage (W): 8                         |  |
| Max. Wattage Per Lamp (W): 8                        |  |
| Lamp Base: GU10                                     |  |
| Input Voltage (V): 120                              |  |
| LED   |  |
| OPTICAL   |  |
| RATINGS AND CERTIFICATIONS                          |  |
| Certified By: CSA Certified to UL and CSA Standards |  |
| IP rating: IP20                                     |  |

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

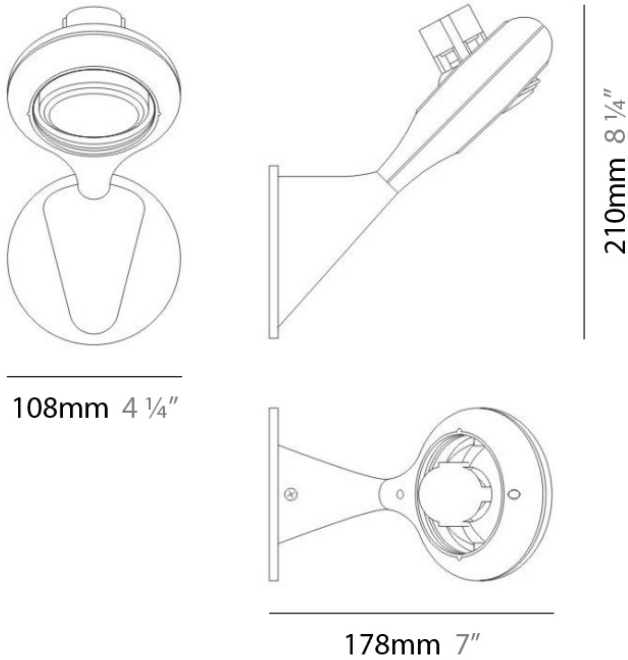

SPACE RECESSED

D96001

GENERAL

|                            |
|----------------------------|
| Series: Space              |
| Brand: Milan               |
| Division: Design           |
| Mounting Type: Recessed    |
| Mounting Location: Ceiling |
| Subcategory: Downlight     |

PHYSICAL

|                                   |
|-----------------------------------|
| Shape: Rectangle                  |
| Length (mm): 445                  |
| Length (in): 17 1/2               |
| Width (mm): 150                   |
| Width (in): 6                     |
| Height (mm): 89                   |
| Height (in): 3 1/2                |
| Light Distribution: Direct        |
| Weight (kg): 3.2                  |
| Weight (lbs): 7                   |
| Diffuser: Glass - Sold Separately |
| Fixture Finish: Metallic Gray     |
| Fixture Material: Metal           |

ELECTRICAL

|                                  |
|----------------------------------|
| Number of Lamps: 2               |
| Lamp Type: LED Retrofit          |
| Lamp Shape: MR16                 |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 10     |
| Max. Wattage Per Lamp (W): 5     |
| Lamp Base: GU10                  |




LED

OPTICAL

RATINGS AND CERTIFICATIONS

|   |
|---|
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP20                                     |

|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

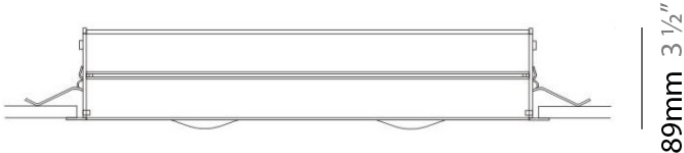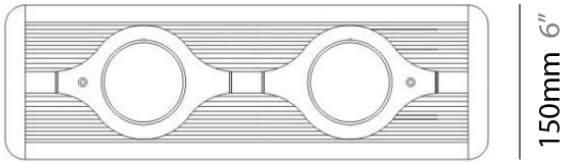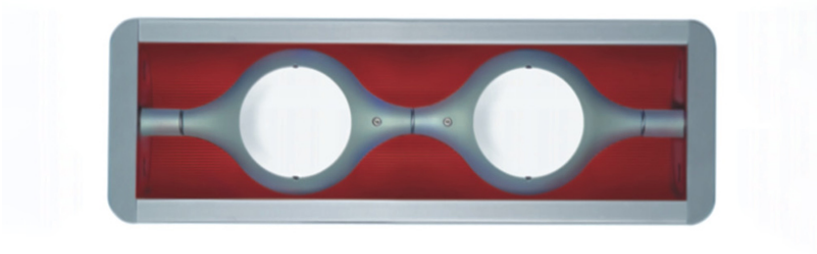

445mm 17 1/2"







SPACE RECESSED

D96006

|   |  |
|---|--|
| GENERAL   |  |
| Series: Space   |  |
| Brand: Milan  |  |
| Division: Design  |  |
| Mounting Type: Recessed   |  |
| Mounting Location: Ceiling  |  |
| Subcategory: Downlight  |  |
| PHYSICAL  |  |
| Shape: Square   |  |
| Length (mm): 387  |  |
| Length (in): 15 ¼   |  |
| Width (mm): 387   |  |
| Width (in): 15 ¼  |  |
| Height (mm): 89   |  |
| Height (in): 3 ½  |  |
| Light Distribution: Direct  |  |
| Weight (kg): 3.2  |  |
| Weight (lbs): 7   |  |
| Diffuser: Glass - Sold Separately   |  |
| Fixture Finish: Metallic Gray   |  |
| Fixture Material: Metal   |  |
| ELECTRICAL  |  |
| Number of Lamps: 4  |  |
| Lamp Type: LED Retrofit   |  |
| Lamp Shape: MR16  |  |
| Bulb Included: Bulb Not Included  |  |
| Total Output Wattage (W): 20  |  |
| Max. Wattage Per Lamp (W): 5  |  |
| Lamp Base: GU10   |  |
| Housing: Non - IC rated remodel housing is for use in non - insulated areas or where insulation is at least 3 |  |
| Input Voltage (V): 120  |  |
| LED   |  |
| OPTICAL   |  |
| RATINGS AND CERTIFICATIONS  |  |
| Certified By: CSA Certified to UL and CSA Standards   |  |
| IP rating: IP20   |  |

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

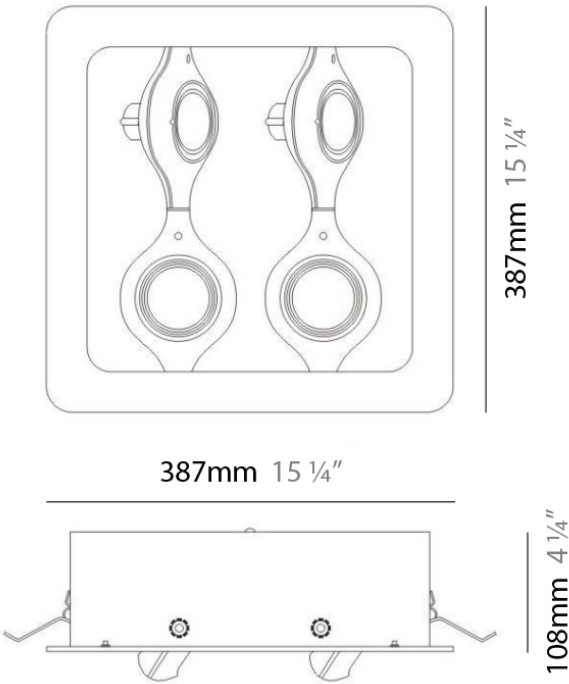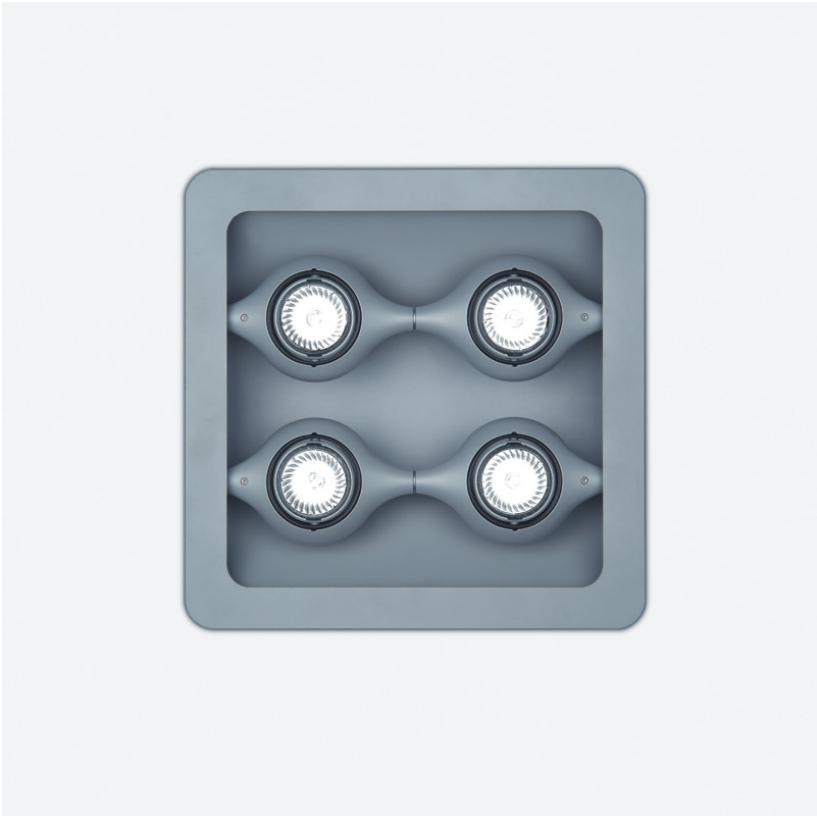

SPACE RECESSED

D96008

GENERAL

Series: Space

Brand: Milan

Division: Design

Mounting Type: Recessed

Mounting Location: Ceiling

Subcategory: Downlight

PHYSICAL

Shape: Rectangle

Light Distribution: Direct

Weight (kg): 2.7

Weight (lbs): 6

Diffuser: Glass - Sold Separately

Fixture Material: Metal

ELECTRICAL

Number of Lamps: 2

Lamp Type: LED Retrofit / CFL

Bulb Included: Bulb Not Included

Total Output Wattage (W): 46 / 78

Max. Wattage Per Lamp (W): 23 / 39

Lamp Base: G5

Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP44


PROJECT

TYPE

NOTES

QUANTITY

DATE

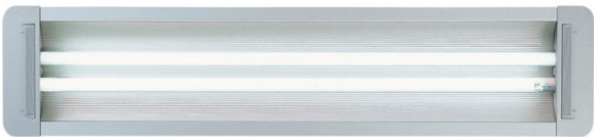

SPACE

D99000

**GENERAL**  
Series: Space  
Brand: Milan  
Division: Design

**PHYSICAL**  
Shape: Round  
Installation Requirement: Glass for Space series fixtures.  
Diffuser: Satin Opal Acid-Etched Glass  
Fixture Material: Glass

**ELECTRICAL**

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20

PROJECT  
TYPE  
NOTES  
QUANTITY  
DATE



SPACE

D99001

**GENERAL**  
Series: Space  
Brand: Milan  
Division: Design

**PHYSICAL**  
Shape: Round  
Installation Requirement: Glass for Space series fixtures.  
Diffuser: Red Glass  
Fixture Material: Glass

**ELECTRICAL**

**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP20

PROJECT

TYPE






































































NOTES

QUANTITY











DATE













## LEGEND

|  |   |   |  |   |  |
|--|---|---|--|---|--|
|    | floor-mounted   |    | pivotal  |    | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|    | wall and ceiling: recessed and surface mounted            |    | rotating   |    | warm dim / natural dimming LED   |
|    | ceiling-mounted and wall-mounted                          |    | illuminate tilted  |    | rechargeable battery powered   |
|    | wall-mounted  |    | color of suspension cable                                    |    | fixture with natural vivid LED (upon request)  |
|    | omni-directional light distribution                       |    | length of suspension cable                                   |    | color rendering index  |
|    | direct light distribution                                 |    | reflector degree selection                                   |    | color temperature  |
|    | direct/indirect light distribution                        |    | super spot   |    | lumen (luminous flux)  |
|    | indirect light distribution                               |    | lens   |    | efficacy (lumens per watt)   |
|    | asymmetric light distribution                             |    | lens pack  |    | Unified Glare Rating (UGR) range from 5-40   |
|    | aura light distribution                                   |    | shine ring   |    | marine grade (AISI 316 stainless steel)  |
|    | round wall or ceiling cut-out                             |    | integrated shine ring with diffuser                          |    | walk on  |
|    | square wall or ceiling cut-out                            |    | free individual colors 01-29                                 |    | drive on   |
|   | the supplied jig specifies the cutout dimensions          |   | individual colors: 00 (free of charge), 01-25 (extra charge) |   | Dark Sky Compliance  |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth  |  | luminaire part to be colored (F2)                            |  | lamp protected against explosion   |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |  | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |  | acoustic material  |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |  | protection class I, protection insulation  |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |  | protection class II, protection insulation   |
|  | separately switchable                                     |  | indirect diffuser  |  | ETL Certified to UL and CSA Standards  |
|  | sensor  |  | direct diffuser  |  | UL Certified to UL and CSA Standards   |
|  | remote control  |  | ball-proof (upon request)                                    |  | CSA Certified to UL and CSA Standards  |
|  | available upon request                                    |  | accessory  |  | Certified for North American Standards   |

## IP RATING

|   |  |
|---|--|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)   |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water   |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas  |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods  |

## IK RATING

|   |   |
|---|---|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |