

D11003

GENERAL
Series: Space
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL
Shape: Square
Length (mm): 600
Length (in): 23 ½
Width (mm): 600
Width (in): 23 ½
Height (mm): 1600
Height (in): 63
Light Distribution: Direct
Weight (kg): 10.6
Weight (lbs): 23.5
Diffuser: Satin Glass
Fixture Finish: ALU
Fixture Material: Aluminum


ELECTRICAL
Number of Lamps: 1 + 1
Lamp Type: LED Retrofit / Halogen
Bulb Included: Bulb Not Included
Total Output Wattage (W): 26 / 185
Max. Wattage Per Lamp (W): 6 / 35 + 20 / 150
Lamp Base: G9
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

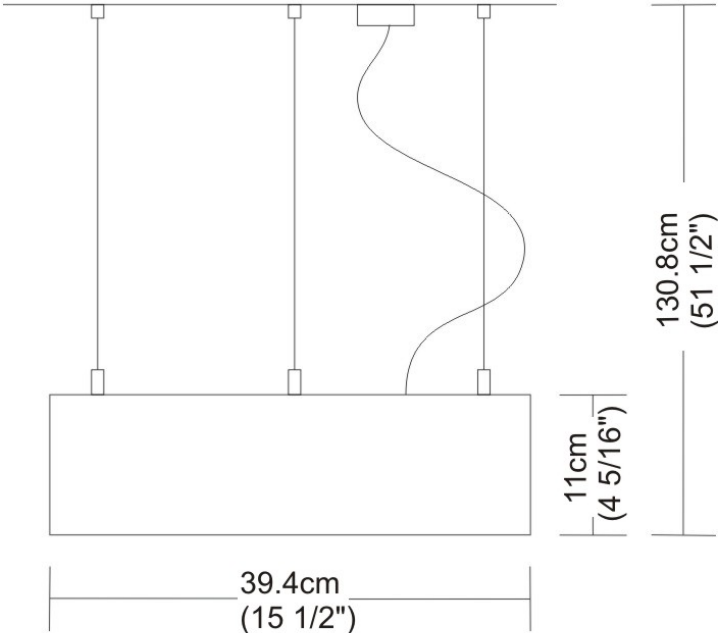

GENERAL
Series: Space
Brand: Milan
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL
Shape: Abstract
Width (mm): 108
Width (in): 4 ¼
Height (mm): 730
Height (in): 28
Weight (kg): 1.4
Weight (lbs): 3
Fixture Finish: Metallic Gray
Fixture Material: Aluminum

ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 9
Max. Wattage Per Lamp (W): 3
Lamp Base: G9
Input Voltage (V): 120


LED
OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE



108mm 4 ¼"



730mm 28 ¾"


GENERAL
Series: Space
Brand: Milan
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL
Shape: Abstract
Length (mm): 866
Length (in): 34 1/4
Width (mm): 108
Width (in): 4 1/4
Height (mm): 1570
Height (in): 62
Weight (kg): 2.3
Weight (lbs): 5
Fixture Finish: Metallic Gray
Fixture Material: Aluminum

ELECTRICAL
Number of Lamps: 4
Lamp Type: LED Retrofit
Lamp Shape: MR16
Bulb Included: Bulb Not Included
Total Output Wattage (W): 12
Max. Wattage Per Lamp (W): 3
Lamp Base: GU10
Input Voltage (V): 120

LED
OPTICAL
RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

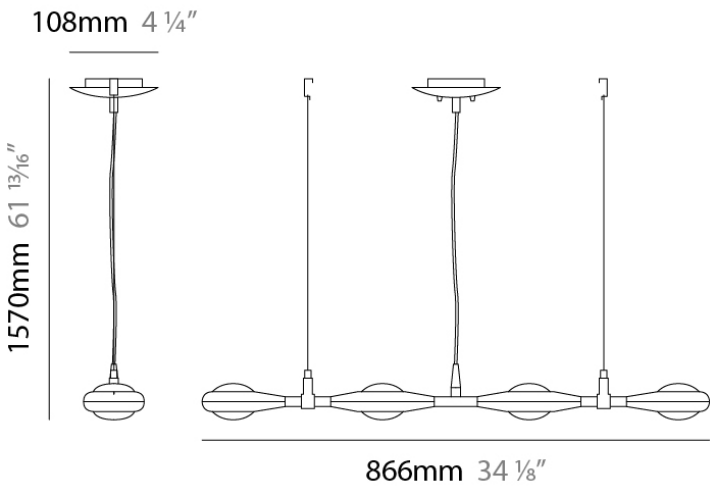

D91124

GENERAL
Series: Space
Brand: Milan
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant


PHYSICAL
Shape: Abstract
Length (mm): 866
Length (in): 34 1/4
Width (mm): 108
Width (in): 4 1/4
Height (mm): 1570
Height (in): 62
Weight (kg): 2.3
Weight (lbs): 5
Fixture Finish: Metallic Gray
Fixture Material: Aluminum

ELECTRICAL
Number of Lamps: 4
Lamp Type: LED Retrofit
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 12
Max. Wattage Per Lamp (W): 3
Lamp Base: G9
Input Voltage (V): 120

LED
OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

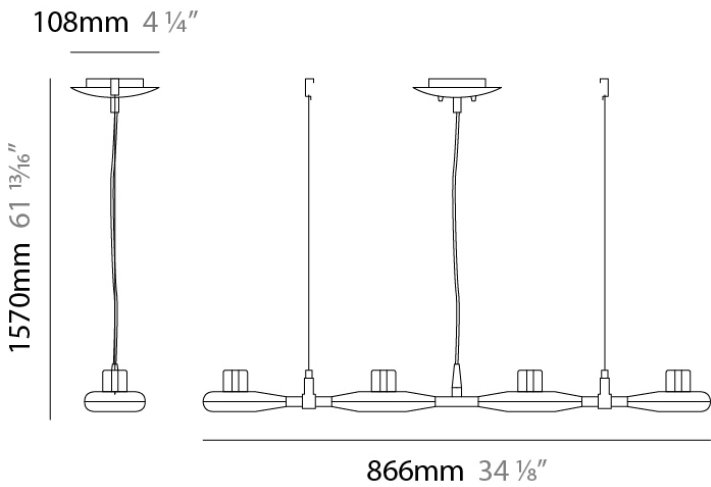

D93050


GENERAL
Series: Space
Brand: Milan
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Up/Down Light

PHYSICAL
Shape: Oblong
Diameter (mm): 108
Diameter (in): 4 ¼
Height (mm): 70
Height (in): 2 ¾
Extension (mm): 159
Extension (in): 6 ¼
Light Distribution: Direct / Indirect
Weight (kg): 1.4
Weight (lbs): 3
Diffuser: Glass sold Separately
Fixture Finish: Metallic Gray
Fixture Material: Glass / Aluminum

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 3
Max. Wattage Per Lamp (W): 3
Lamp Base: G9
Input Voltage (V): 120

LED
OPTICAL
RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

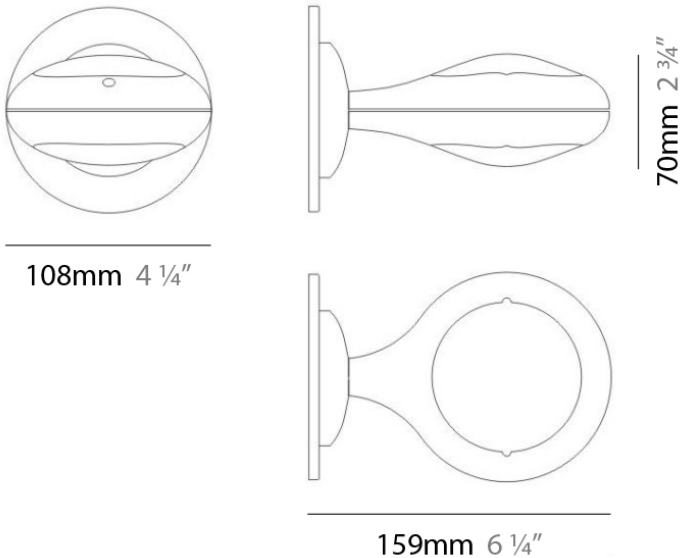

D93051

GENERAL
Series: Space
Brand: Milan
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Up/Down Light

PHYSICAL
Shape: Oblong
Diameter (mm): 108
Diameter (in): 4 ¼
Height (mm): 178
Height (in): 7
Extension (mm): 178
Extension (in): 7
Light Distribution: Direct / Indirect
Weight (kg): 1.4
Weight (lbs): 3
Diffuser: Glass - Sold Separately
Fixture Finish: Metallic Gray
Fixture Material: Glass / Aluminum


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 3
Max. Wattage Per Lamp (W): 3
Lamp Base: G9
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20


PROJECT
TYPE
NOTES
QUANTITY
DATE

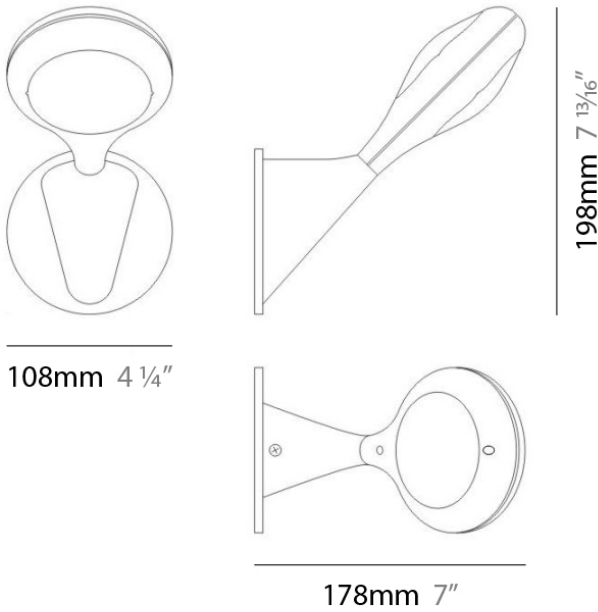

D93052

GENERAL	
Series: Space	
Brand: Milan	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Downlight	
PHYSICAL	
Shape: Oblong	
Diameter (mm): 108	
Diameter (in): 4 ¼	
Height (mm): 178	
Height (in): 7	
Extension (mm): 178	
Extension (in): 7	
Light Distribution: Direct	
Weight (kg): 1.4	
Weight (lbs): 3	
Diffuser: Glass - Sold Separately	
Fixture Finish: Metallic Gray	
Fixture Material: Glass / Aluminum	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: MR20	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 8	
Max. Wattage Per Lamp (W): 8	
Lamp Base: GU10	
Input Voltage (V): 120	
LED	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP20	

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

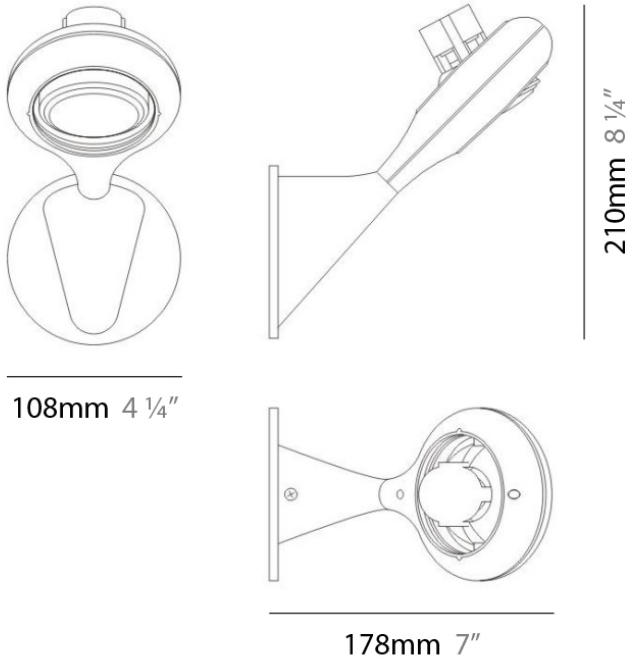

SPACE RECESSED

D96001

GENERAL

Series: Space
Brand: Milan
Division: Design
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Rectangle
Length (mm): 445
Length (in): 17 1/2
Width (mm): 150
Width (in): 6
Height (mm): 89
Height (in): 3 1/2
Light Distribution: Direct
Weight (kg): 3.2
Weight (lbs): 7
Diffuser: Glass - Sold Separately
Fixture Finish: Metallic Gray
Fixture Material: Metal

ELECTRICAL

Number of Lamps: 2
Lamp Type: LED Retrofit
Lamp Shape: MR16
Bulb Included: Bulb Not Included
Total Output Wattage (W): 10
Max. Wattage Per Lamp (W): 5
Lamp Base: GU10




LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

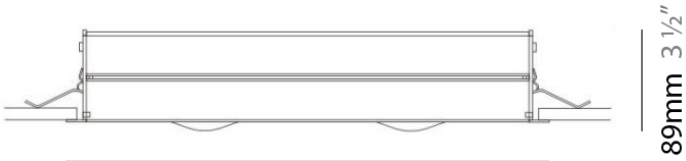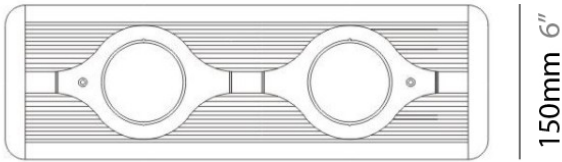
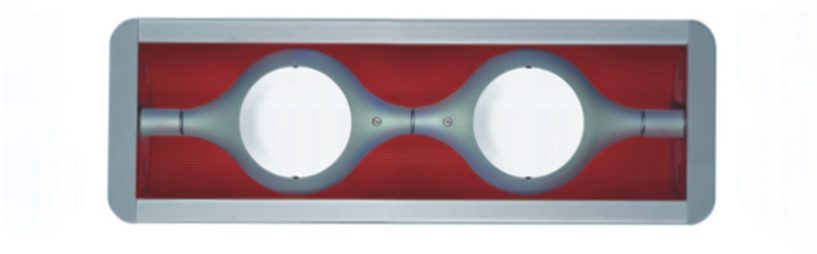


SPACE RECESSED

D96006

GENERAL	
Series: Space	
Brand: Milan	
Division: Design	
Mounting Type: Recessed	
Mounting Location: Ceiling	
Subcategory: Downlight	
PHYSICAL	
Shape: Square	
Length (mm): 387	
Length (in): 15 ¼	
Width (mm): 387	
Width (in): 15 ¼	
Height (mm): 89	
Height (in): 3 ½	
Light Distribution: Direct	
Weight (kg): 3.2	
Weight (lbs): 7	
Diffuser: Glass - Sold Separately	
Fixture Finish: Metallic Gray	
Fixture Material: Metal	
ELECTRICAL	
Number of Lamps: 4	
Lamp Type: LED Retrofit	
Lamp Shape: MR16	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 20	
Max. Wattage Per Lamp (W): 5	
Lamp Base: GU10	
Housing: Non - IC rated remodel housing is for use in non - insulated areas or where insulation is at least 3	
Input Voltage (V): 120	
LED	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP20	

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

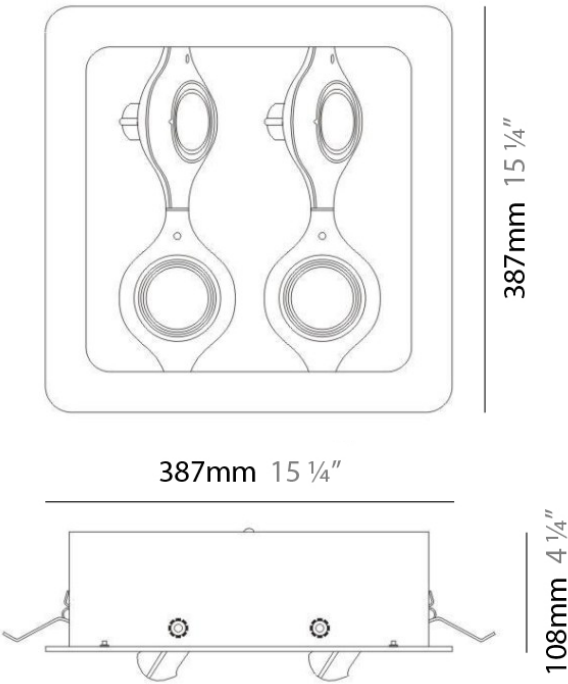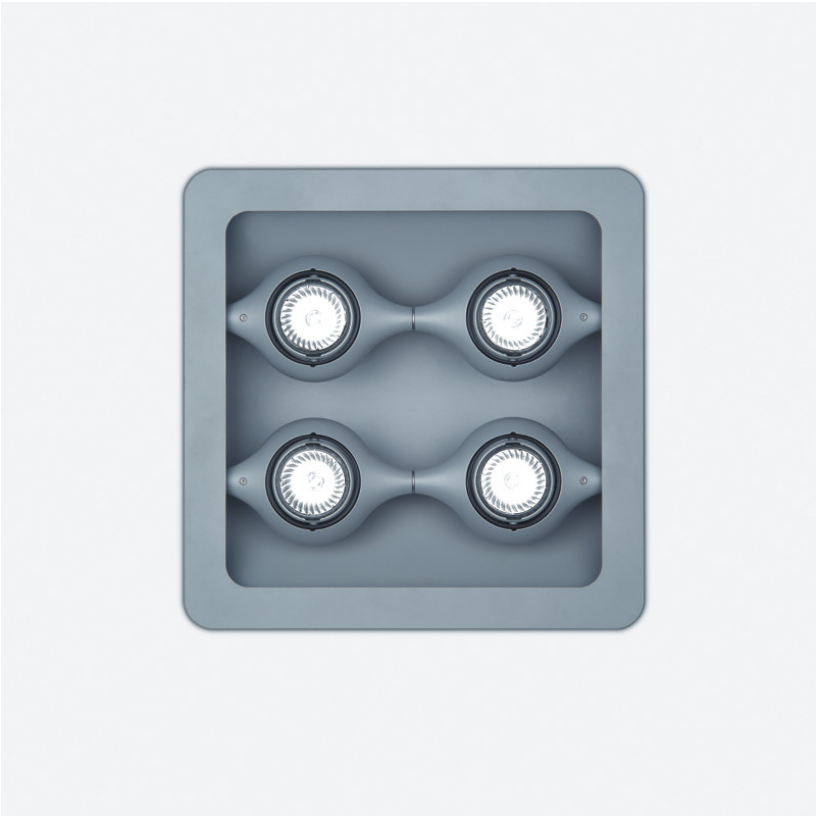

SPACE RECESSED

D96008

GENERAL

Series: Space
Brand: Milan
Division: Design
Mounting Type: Recessed
Mounting Location: Ceiling
Subcategory: Downlight

PHYSICAL

Shape: Rectangle
Length (mm): '1208
Length (in): 47 ⁹ / ₁₆
Width (mm): '150
Width (in): 5 ⁷ / ₈
Height (mm): '92
Height (in): 3 ⁵ / ₈
Light Distribution: Direct
Weight (kg): 2.7
Weight (lbs): 6
Diffuser: Glass - Sold Separately
Fixture Material: Metal

ELECTRICAL

Number of Lamps: 2
Lamp Type: LED Retrofit / CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 46 / 78
Max. Wattage Per Lamp (W): 23 / 39
Lamp Base: G5
Input Voltage (V): 120


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP44

PROJECT
TYPE
NOTES
QUANTITY
DATE

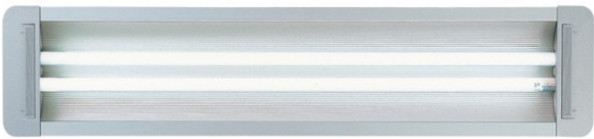

SPACE

D99000

GENERAL
Series: Space
Brand: Milan
Division: Design

PHYSICAL
Shape: Round
Weight (kg): 0.4
Weight (lbs): 0.9
Installation Requirement: Glass for Space series fixtures.
Diffuser: Satin Opal Acid-Etched Glass
Fixture Material: Glass

ELECTRICAL

LED

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT

TYPE

NOTES

QUANTITY

DATE



SPACE

D99001

GENERAL
Series: Space
Brand: Milan
Division: Design

PHYSICAL
Shape: Round
Weight (kg): 0.4
Weight (lbs): 0.9
Installation Requirement: Glass for Space series fixtures.
Diffuser: Red Glass
Fixture Material: Glass

ELECTRICAL

LED

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT

TYPE






































































NOTES

QUANTITY











DATE













LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)