

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL

Shape: Rectangle
Length (mm): 250
Length (in): 9 7⁄8
Height (mm): 70
Height (in): 2 ¾
Extension (mm): 85
Extension (in): 3 ¼
Light Distribution: Direct / Indirect
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Frost White Glass
Fixture Finish: WHI
Fixture Material: Metal

ELECTRICAL


Number of Lamps: 1
Lamp Type: CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 26
Max. Wattage Per Lamp (W): 26
Lamp Base: GX24-q3
Dimming: Non-Dimmable
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS



Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

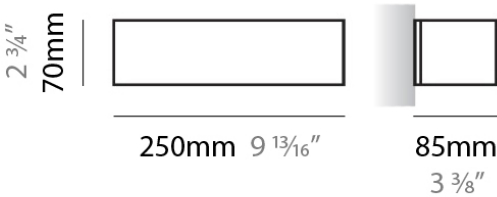

D83138

GENERAL	
Series: Toy	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	
PHYSICAL	
Shape: Rectangle	
Length (mm): 250	
Length (in): 9 7⁄8	
Height (mm): 70	
Height (in): 2 ¾	
Extension (mm): 85	
Extension (in): 3 ¼	
Light Distribution: Direct / Indirect	
Weight (kg): 0.9	
Weight (lbs): 2	
Diffuser: Frost White Glass	
Fixture Finish: SST	
Fixture Material: Metal	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: CFL	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 26	
Max. Wattage Per Lamp (W): 26	
Lamp Base: GX24-q3	
Driver Included: Yes	
Driver Type: Ballast - 120Vac - Non-dimming	
Input Voltage (V): 120	
LED	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP40	


PROJECT
TYPE
NOTES
QUANTITY
DATE

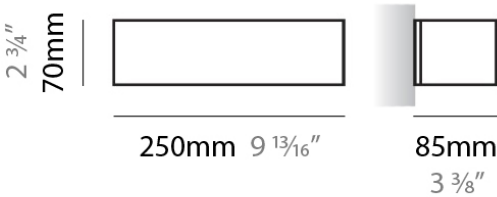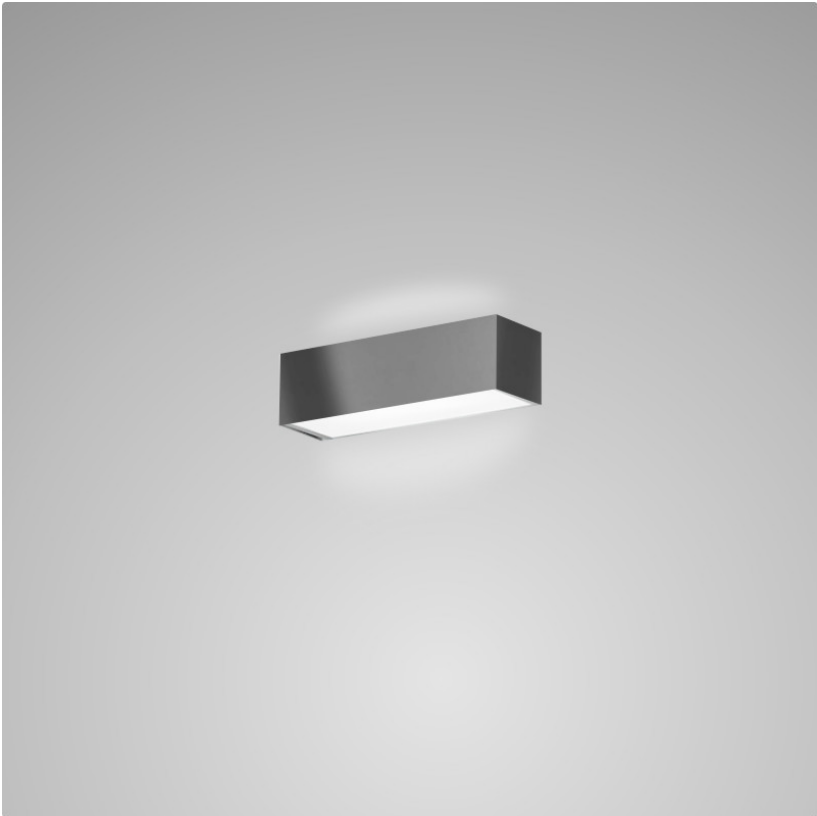

D83139

GENERAL	
Series: Toy	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	
PHYSICAL	
Shape: Rectangle	
Length (mm): 250	
Length (in): 9 7⁄8	
Height (mm): 70	
Height (in): 2 ¾	
Extension (mm): 85	
Extension (in): 3 ¼	
Light Distribution: Direct / Indirect	
Weight (kg): 0.9	
Weight (lbs): 2	
Diffuser: Frost White Glass	
Fixture Finish: SST	
Fixture Material: Metal	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: CFL	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 26	
Max. Wattage Per Lamp (W): 26	
Lamp Base: GX24-q3	
Driver Included: Yes	
Driver Type: Ballast - 120Vac - Non-dimming	
Input Voltage (V): 120	
LED	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP40	

PROJECT
TYPE
NOTES
QUANTITY
DATE

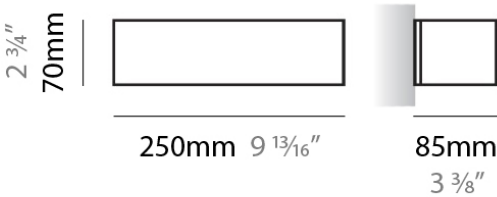

PROJECT
TYPE
NOTES
QUANTITY
DATE

GENERAL

Series: Toy

Brand: Panzeri

Division: Design

Mounting Type: Surface

Mounting Location: Wall

Subcategory: Ambient

PHYSICAL

Shape: Rectangle

Length (mm): 610

Length (in): 24

Height (mm): 70

Height (in): 2 3/4

Extension (mm): 85

Extension (in): 3 3/8

Light Distribution: Direct / Indirect

Weight (kg): 2.7

Weight (lbs): 6

Diffuser: Frost White Glass

Fixture Finish: WHI

Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit / CFL

Bulb Included: Bulb Not Included

Total Output Wattage (W): 26 / 55

Max. Wattage Per Lamp (W): 26 / 55

Lamp Base: 2GX13

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Ballast - Universal - Non-dimming

Input Voltage (V): 120 - 277



LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

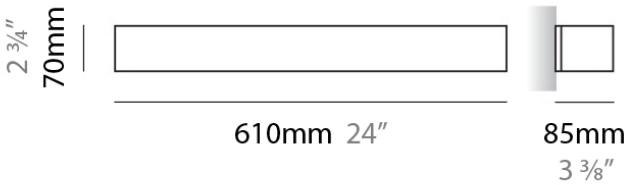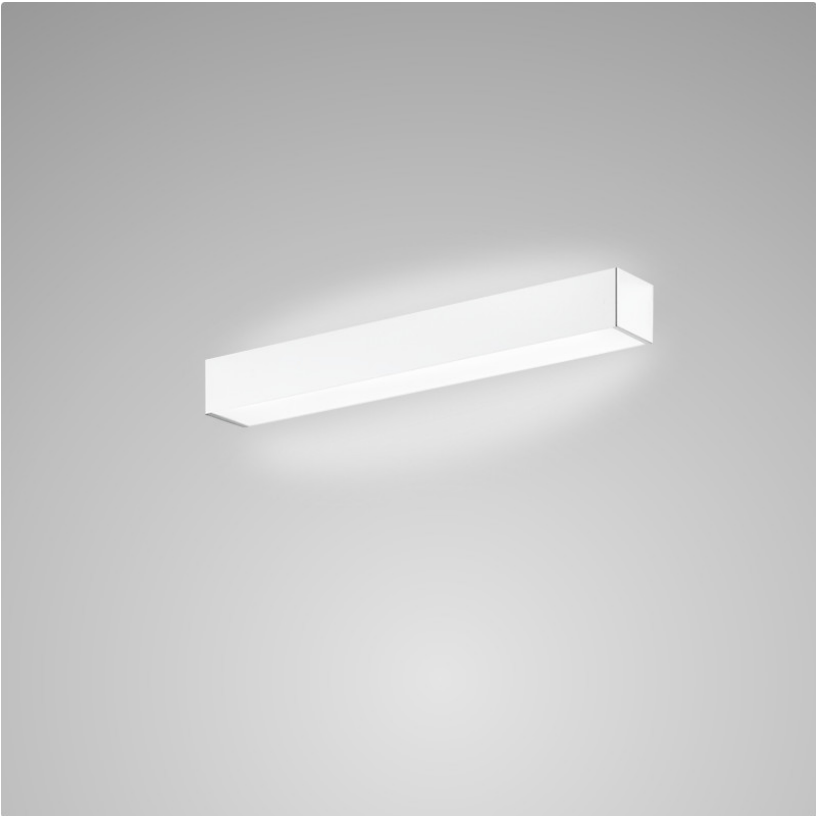

D83141

GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL
Shape: Rectangle
Length (mm): 610
Length (in): 24
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 2.7
Weight (lbs): 6
Diffuser: Frost White Glass
Fixture Finish: SST
Fixture Material: Metal


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 30 / 55
Max. Wattage Per Lamp (W): 30 / 55
Lamp Base: GX24-q3
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

PROJECT
TYPE
NOTES
QUANTITY
DATE

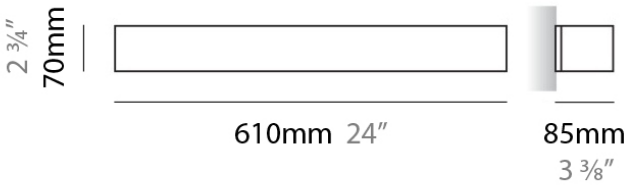

PROJECT
TYPE
NOTES
QUANTITY
DATE

GENERAL

Series: Toy

Brand: Panzeri

Division: Design

Mounting Type: Surface

Mounting Location: Wall

Subcategory: Ambient

PHYSICAL

Shape: Rectangle

Length (mm): 610

Length (in): 24

Height (mm): 70

Height (in): 2 3/4

Extension (mm): 85

Extension (in): 3 3/8

Light Distribution: Direct / Indirect

Weight (kg): 2.7

Weight (lbs): 6

Diffuser: Frost White Glass

Fixture Finish: SST

Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit / CFL

Bulb Included: Bulb Not Included

Total Output Wattage (W): 30 / 55

Max. Wattage Per Lamp (W): 30 / 55

Lamp Base: GX24-q3

Driver Included: Yes

Driver Type: Ballast - 120Vac - Non-dimming

Input Voltage (V): 120


LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards


IP rating: IP40

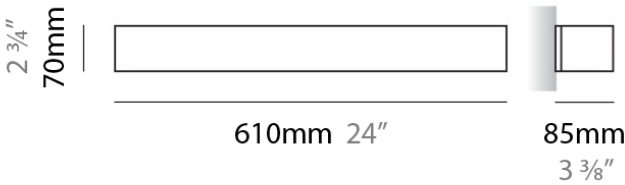

D83147-MSS


GENERAL	
Series: Toy	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
PHYSICAL	
Shape: Square	
Length (mm): 75	
Length (in): 2 15⁄16	
Height (mm): 75	
Height (in): 2 15⁄16	
Extension (mm): 85	
Extension (in): 3 3⁄8	
Light Distribution: Direct / Indirect	
Weight (kg): 0.6	
Weight (lbs): 1	
Diffuser: Frost White Glass	
Fixture Material: Metal	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit / Halogen	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 3 / 35	
Max. Wattage Per Lamp (W): 3 / 35	
Lamp Base: G9	
Input Voltage (V): 120	
LED	
Nominal Lumen (lm): 650	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP20	

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
PHYSICAL
Shape: Square
Length (mm): 75
Length (in): 2 15⁄16
Height (mm): 75
Height (in): 2 15⁄16
Extension (mm): 85
Extension (in): 3 3⁄8
Light Distribution: Direct / Indirect
Weight (kg): 0.6
Weight (lbs): 1
Diffuser: Frost White Glass
Fixture Material: Metal
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Bulb Included: Bulb Not Included
Total Output Wattage (W): 3 / 35
Max. Wattage Per Lamp (W): 3 / 35
Lamp Base: G9
Input Voltage (V): 120
LED
OPTICAL
RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20



D83281-MSS

GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 250
Length (in): 9 13/16
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 0.82
Weight (lbs): 1.8
Diffuser: Frost White Glass
Fixture Material: Metal


ELECTRICAL
Lamp Type: LED
Input Wattage (W): 13
Total Output Wattage (W): 12
Driver Included: Yes
Driver Location: Integrated
Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately)

LED
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 938
CRI: >80 CRI

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

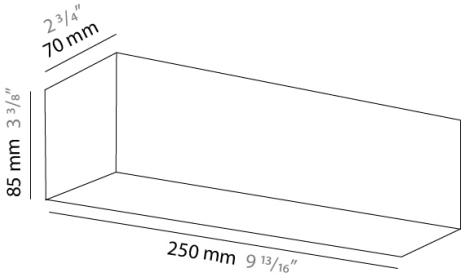

D83281-PSS

GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 250
Length (in): 9 13/16
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 0.82
Weight (lbs): 1.8
Diffuser: Frost White Glass
Fixture Material: Metal



ELECTRICAL
Lamp Type: LED
Input Wattage (W): 13
Total Output Wattage (W): 12
Driver Included: Yes
Driver Location: Integrated
Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately)

LED
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 938
CRI: >80 CRI

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

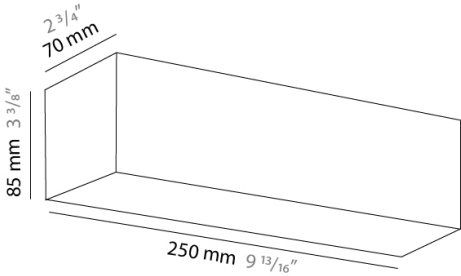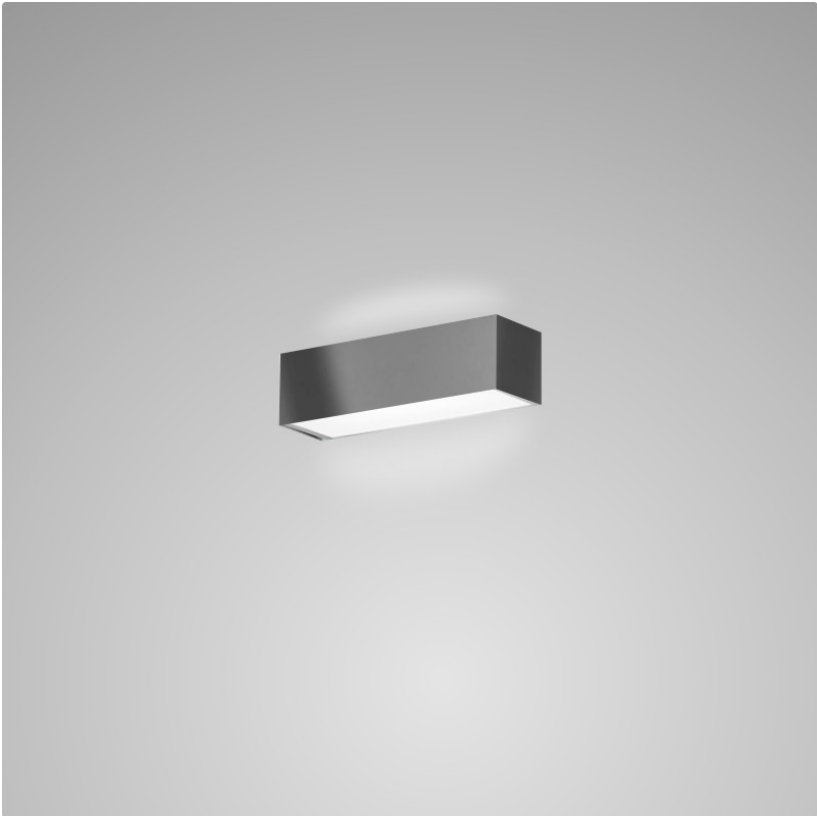

D83281-WHI

GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 250
Length (in): 9 13/16
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 0.82
Weight (lbs): 1.8
Diffuser: Frost White Glass
Fixture Material: Metal



ELECTRICAL
Lamp Type: LED
Input Wattage (W): 13
Total Output Wattage (W): 12
Driver Included: Yes
Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately)

LED
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 938
Nominal Lumen (lm): 2 x 730lm
CRI: >80 CRI

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

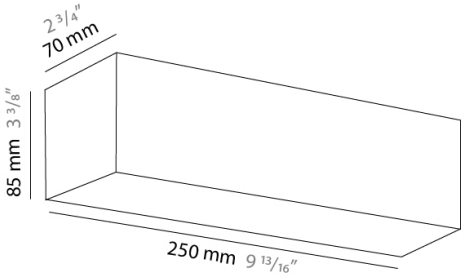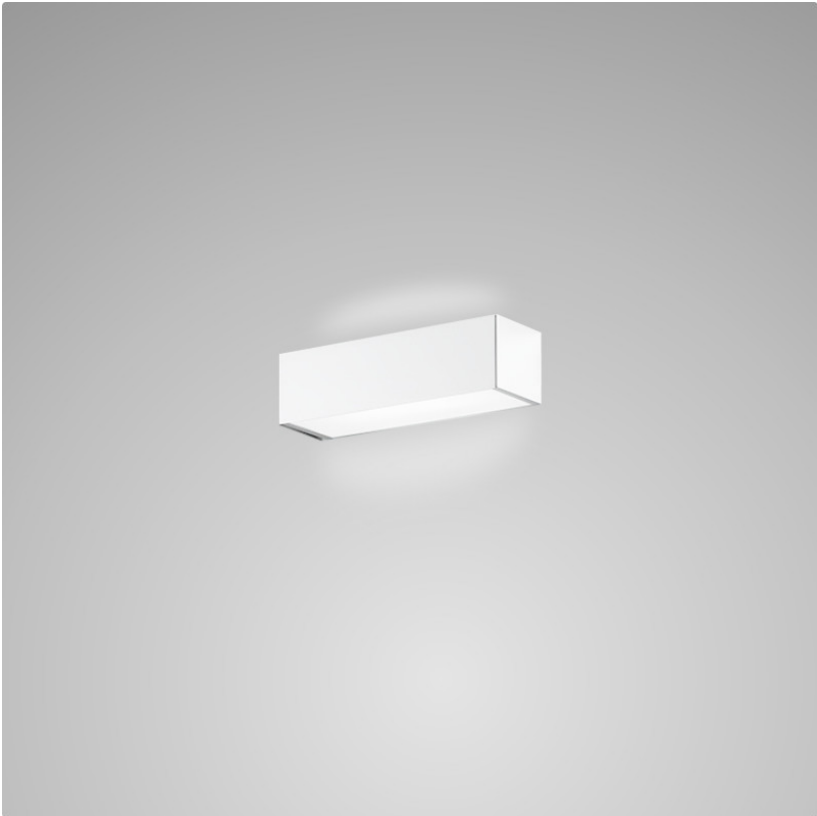

PROJECT
TYPE
NOTES
QUANTITY
DATE


GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL
Shape: Rectangle
Length (mm): 250
Length (in): 9 7⁄8
Height (mm): 70
Height (in): 2 ¾
Extension (mm): 85
Extension (in): 3 ¼
Light Distribution: Direct / Indirect
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Frost White Glass
Fixture Material: Metal

ELECTRICAL
Number of Lamps: 1
Lamp Type: LED
Total Output Wattage (W): 12
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current
Driver Class: Class 2
Input Voltage (V): 120
Upon Request: (Dimming and 277V options available with remote driver sold separately)

LED
Color Temperature (°K): 3000
Nominal Lumen (lm): 2 x 730
CRI: >80 CRI

OPTICAL
RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

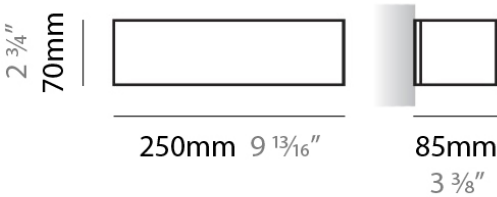

D83286-PSS

GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall

PHYSICAL
Shape: Rectangle
Length (mm): 610
Length (in): 24
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 1.8
Weight (lbs): 4
Diffuser: Frost White Glass
Fixture Material: Metal


ELECTRICAL
Lamp Type: LED
Input Wattage (W): 35
Driver Included: Yes
Driver Type: Integral LED driver, 500mA (Dimming and 277V options available with remote driver sold separately)

LED
Color Temperature (°K): 3000
Max. Delivered Lumen (lm): 2814
CRI: >80 CRI

OPTICAL

RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

PROJECT
TYPE
NOTES
QUANTITY
DATE

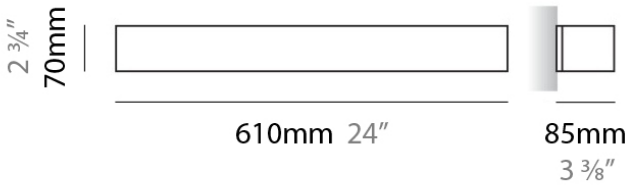

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)