


|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

|                                                     |
|-----------------------------------------------------|
| GENERAL                                             |
| Series: Toy                                         |
| Brand: Panzeri                                      |
| Division: Design                                    |
| Mounting Type: Surface                              |
| Mounting Location: Wall                             |
| Subcategory: Ambient                                |
| PHYSICAL                                            |
| Shape: Rectangle                                    |
| Length (mm): 250                                    |
| Length (in): 9 7⁄8                                  |
| Height (mm): 70                                     |
| Height (in): 2 ¾                                    |
| Extension (mm): 85                                  |
| Extension (in): 3 ¼                                 |
| Light Distribution: Direct / Indirect               |
| Weight (kg): 0.9                                    |
| Weight (lbs): 2                                     |
| Diffuser: Frost White Glass                         |
| Fixture Finish: WHI                                 |
| Fixture Material: Metal                             |
| ELECTRICAL                                          |
| Number of Lamps: 1                                  |
| Lamp Type: CFL                                      |
| Bulb Included: Bulb Not Included                    |
| Total Output Wattage (W): 26                        |
| Max. Wattage Per Lamp (W): 26                       |
| Lamp Base: GX24-q3                                  |
| Dimming: Non-Dimmable                               |
| Driver Included: Yes                                |
| Driver Type: Ballast - 120Vac - Non-dimming         |
| Input Voltage (V): 120                              |
| LED                                                 |
| OPTICAL                                             |
| RATINGS AND CERTIFICATIONS                          |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40                                     |

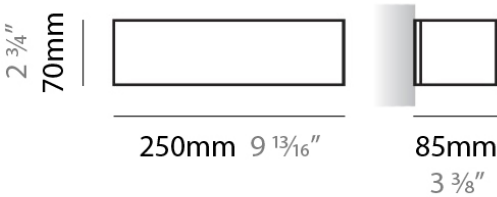

D83138

**GENERAL**  
Series: Toy  
Brand: Panzeri  
Division: Design  
Mounting Type: Surface  
Mounting Location: Wall  
Subcategory: Ambient

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 250  
Length (in): 9 7⁄8  
Height (mm): 70  
Height (in): 2 ¾  
Extension (mm): 85  
Extension (in): 3 ¼  
Light Distribution: Direct / Indirect  
Weight (kg): 0.9  
Weight (lbs): 2  
Diffuser: Frost White Glass  
Fixture Finish: SST  
Fixture Material: Metal

**ELECTRICAL**  
Number of Lamps: 1  
Lamp Type: CFL  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 26  
Max. Wattage Per Lamp (W): 26  
Lamp Base: GX24-q3  
Driver Included: Yes  
Driver Type: Ballast - 120Vac - Non-dimming  
Input Voltage (V): 120



LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP40


|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

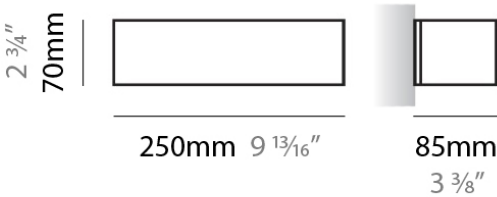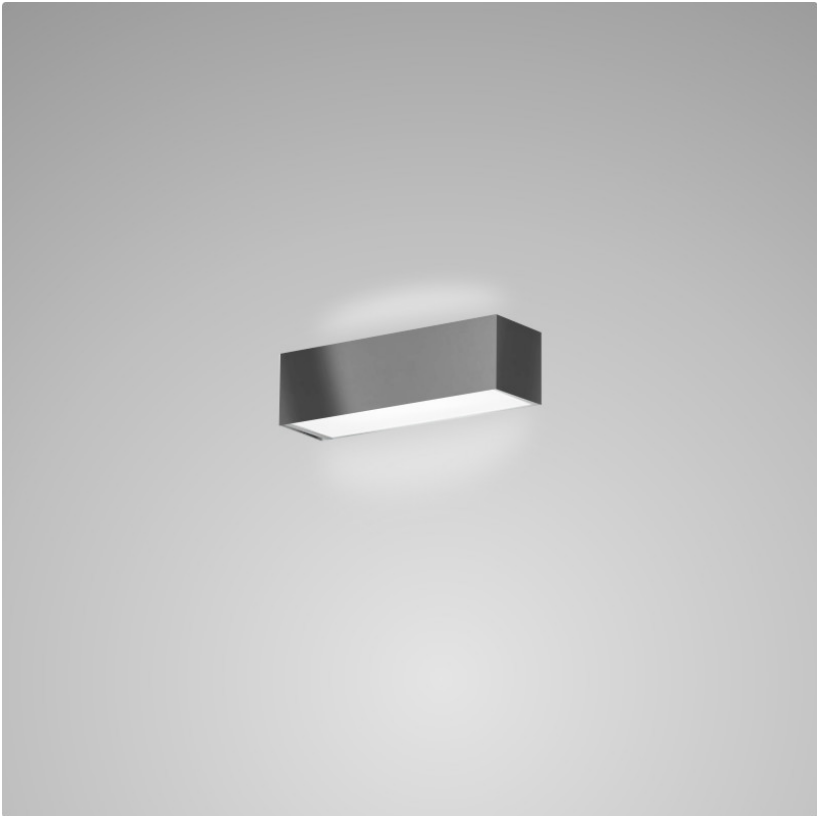

D83139



|                                                     |  |
|-----------------------------------------------------|--|
| GENERAL                                             |  |
| Series: Toy                                         |  |
| Brand: Panzeri                                      |  |
| Division: Design                                    |  |
| Mounting Type: Surface                              |  |
| Mounting Location: Wall                             |  |
| Subcategory: Ambient                                |  |
| PHYSICAL                                            |  |
| Shape: Rectangle                                    |  |
| Length (mm): 250                                    |  |
| Length (in): 9 7⁄8                                  |  |
| Height (mm): 70                                     |  |
| Height (in): 2 ¾                                    |  |
| Extension (mm): 85                                  |  |
| Extension (in): 3 ¼                                 |  |
| Light Distribution: Direct / Indirect               |  |
| Weight (kg): 0.9                                    |  |
| Weight (lbs): 2                                     |  |
| Diffuser: Frost White Glass                         |  |
| Fixture Finish: SST                                 |  |
| Fixture Material: Metal                             |  |
| ELECTRICAL                                          |  |
| Number of Lamps: 1                                  |  |
| Lamp Type: CFL                                      |  |
| Bulb Included: Bulb Not Included                    |  |
| Total Output Wattage (W): 26                        |  |
| Max. Wattage Per Lamp (W): 26                       |  |
| Lamp Base: GX24-q3                                  |  |
| Driver Included: Yes                                |  |
| Driver Type: Ballast - 120Vac - Non-dimming         |  |
| Input Voltage (V): 120                              |  |
| LED                                                 |  |
| OPTICAL                                             |  |
| RATINGS AND CERTIFICATIONS                          |  |
| Certified By: CSA Certified to UL and CSA Standards |  |
| IP rating: IP40                                     |  |

|          |  |
|----------|--|
| PROJECT  |  |
| TYPE     |  |
| NOTES    |  |
| QUANTITY |  |
| DATE     |  |

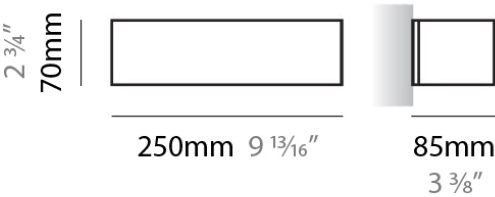

|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

|                                                     |
|-----------------------------------------------------|
| GENERAL                                             |
| Series: Toy                                         |
| Brand: Panzeri                                      |
| Division: Design                                    |
| Mounting Type: Surface                              |
| Mounting Location: Wall                             |
| Subcategory: Ambient                                |
| PHYSICAL                                            |
| Shape: Rectangle                                    |
| Length (mm): 610                                    |
| Length (in): 24                                     |
| Height (mm): 70                                     |
| Height (in): 2 3/4                                  |
| Extension (mm): 85                                  |
| Extension (in): 3 3/8                               |
| Light Distribution: Direct / Indirect               |
| Weight (kg): 2.7                                    |
| Weight (lbs): 6                                     |
| Diffuser: Frost White Glass                         |
| Fixture Finish: WHI                                 |
| Fixture Material: Metal                             |
| ELECTRICAL                                          |
| Number of Lamps: 1                                  |
| Lamp Type: LED Retrofit / CFL                       |
| Bulb Included: Bulb Not Included                    |
| Total Output Wattage (W): 26 / 55                   |
| Max. Wattage Per Lamp (W): 26 / 55                  |
| Lamp Base: 2GX13                                    |
| Dimming: Non-Dimmable                               |
| Driver Included: Yes                                |
| Driver Location: Integrated                         |
| Driver Type: Ballast - Universal - Non-dimming      |
| Input Voltage (V): 120 - 277                        |
| LED                                                 |
| OPTICAL                                             |
| RATINGS AND CERTIFICATIONS                          |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40                                     |

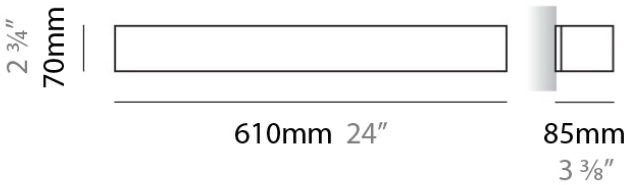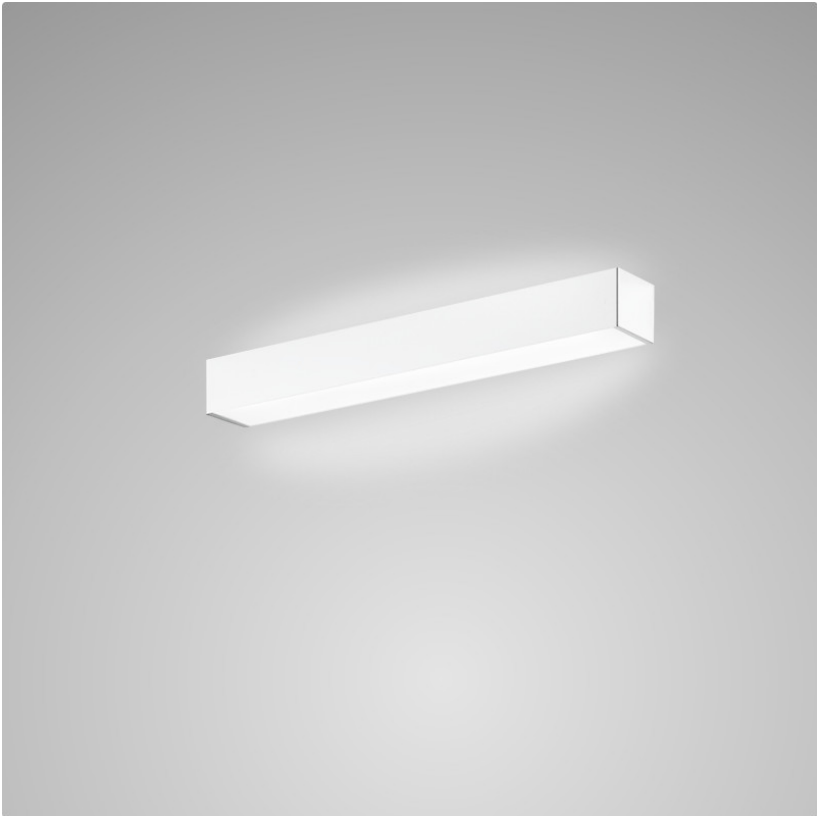

D83141

**GENERAL**  
Series: Toy  
Brand: Panzeri  
Division: Design  
Mounting Type: Surface  
Mounting Location: Wall  
Subcategory: Ambient

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 610  
Length (in): 24  
Height (mm): 70  
Height (in): 2 3/4  
Extension (mm): 85  
Extension (in): 3 3/8  
Light Distribution: Direct / Indirect  
Weight (kg): 2.7  
Weight (lbs): 6  
Diffuser: Frost White Glass  
Fixture Finish: SST  
Fixture Material: Metal


**ELECTRICAL**  
Number of Lamps: 1  
Lamp Type: LED Retrofit / CFL  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 30 / 55  
Max. Wattage Per Lamp (W): 30 / 55  
Lamp Base: GX24-q3  
Driver Included: Yes  
Driver Type: Ballast - 120Vac - Non-dimming  
Input Voltage (V): 120

LED

OPTICAL

**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP40

|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

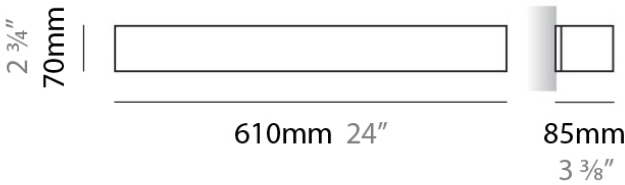


|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

|                         |
|-------------------------|
| GENERAL                 |
| Series: Toy             |
| Brand: Panzeri          |
| Division: Design        |
| Mounting Type: Surface  |
| Mounting Location: Wall |
| Subcategory: Ambient    |

|                                       |
|---------------------------------------|
| PHYSICAL                              |
| Shape: Rectangle                      |
| Length (mm): 610                      |
| Length (in): 24                       |
| Height (mm): 70                       |
| Height (in): 2 3/4                    |
| Extension (mm): 85                    |
| Extension (in): 3 3/8                 |
| Light Distribution: Direct / Indirect |
| Weight (kg): 2.7                      |
| Weight (lbs): 6                       |
| Diffuser: Frost White Glass           |
| Fixture Finish: SST                   |
| Fixture Material: Metal               |


|                                             |
|---------------------------------------------|
| ELECTRICAL                                  |
| Number of Lamps: 1                          |
| Lamp Type: LED Retrofit / CFL               |
| Bulb Included: Bulb Not Included            |
| Total Output Wattage (W): 30 / 55           |
| Max. Wattage Per Lamp (W): 30 / 55          |
| Lamp Base: GX24-q3                          |
| Driver Included: Yes                        |
| Driver Type: Ballast - 120Vac - Non-dimming |
| Input Voltage (V): 120                      |

|                                                     |
|-----------------------------------------------------|
| LED                                                 |
| OPTICAL                                             |
| RATINGS AND CERTIFICATIONS                          |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40                                     |

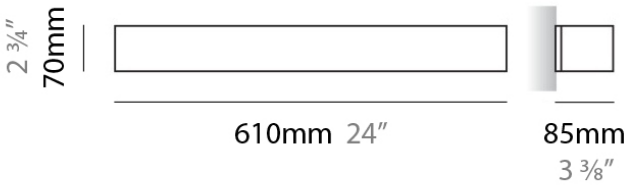

|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

|                                                     |
|-----------------------------------------------------|
| GENERAL                                             |
| Series: Toy                                         |
| Brand: Panzeri                                      |
| Division: Design                                    |
| Mounting Type: Surface                              |
| Mounting Location: Wall                             |
| Subcategory: Ambient                                |
| PHYSICAL                                            |
| Shape: Rectangle                                    |
| Length (mm): 250                                    |
| Length (in): 9 7⁄8                                  |
| Height (mm): 70                                     |
| Height (in): 2 ¾                                    |
| Extension (mm): 85                                  |
| Extension (in): 3 ¼                                 |
| Light Distribution: Direct / Indirect               |
| Weight (kg): 0.9                                    |
| Weight (lbs): 2                                     |
| Diffuser: Frost White Glass                         |
| Fixture Material: Metal                             |
| ELECTRICAL                                          |
| Number of Lamps: 1                                  |
| Lamp Type: CFL                                      |
| Bulb Included: Bulb Not Included                    |
| Total Output Wattage (W): 26                        |
| Max. Wattage Per Lamp (W): 26                       |
| Lamp Base: GX24-q3                                  |
| Driver Included: Yes                                |
| Input Voltage (V): 120                              |
| LED                                                 |
| OPTICAL                                             |
| RATINGS AND CERTIFICATIONS                          |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40                                     |

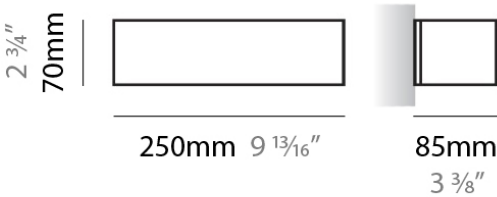

|          |
|----------|
| PROJECT  |
| TYPE     |
| NOTES    |
| QUANTITY |
| DATE     |

**GENERAL**

Series: Toy

Brand: Panzeri

Division: Design

Mounting Type: Surface

Mounting Location: Wall

Subcategory: Ambient

**PHYSICAL**

Shape: Rectangle

Length (mm): 250

Length (in): 9 7⁄8

Height (mm): 70

Height (in): 2 ¾

Extension (mm): 85

Extension (in): 3 ¼

Light Distribution: Direct / Indirect

Weight (kg): 0.9

Weight (lbs): 2

Diffuser: Frost White Glass

Fixture Material: Metal

**ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED

Total Output Wattage (W): 12

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current

Driver Class: Class 2

Input Voltage (V): 120

Upon Request: (Dimming and 277V options available with remote driver sold separately)

**LED**

Color Temperature (°K): 3000

Nominal Lumen (lm): 2 x 730


CRI: >80 CRI

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

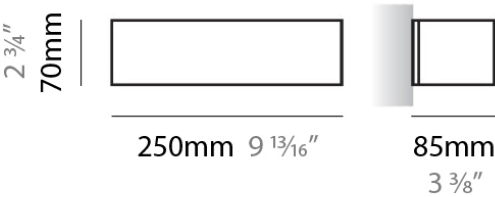



## LEGEND

|                                                                                    |                                                           |                                                                                     |                                                              |                                                                                                                                                                         |                                                                                                |
|------------------------------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
|    | floor-mounted                                             |    | pivotal                                                      |                                                                                      | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+                    |
|    | wall and ceiling: recessed and surface mounted            |    | rotating                                                     |                                                                                      | warm dim / natural dimming LED                                                                 |
|    | ceiling-mounted and wall-mounted                          |    | illuminate tilted                                            |                                                                                      | rechargeable battery powered                                                                   |
|    | wall-mounted                                              |    | color of suspension cable                                    |                                                                                      | fixture with natural vivid LED (upon request)                                                  |
|    | omni-directional light distribution                       |    | length of suspension cable                                   |                                                                                      | color rendering index                                                                          |
|    | direct light distribution                                 |    | reflector degree selection                                   |                                                                                      | color temperature                                                                              |
|    | direct/indirect light distribution                        |    | super spot                                                   |                                                                                      | lumen (luminous flux)                                                                          |
|    | indirect light distribution                               |    | lens                                                         |                                                                                      | efficacy (lumens per watt)                                                                     |
|    | asymmetric light distribution                             |    | lens pack                                                    |                                                                                      | Unified Glare Rating (UGR) range from 5-40                                                     |
|    | aura light distribution                                   |    | shine ring                                                   |                                                                                      | marine grade (AISI 316 stainless steel)                                                        |
|    | round wall or ceiling cut-out                             |    | integrated shine ring with diffuser                          |                                                                                      | walk on                                                                                        |
|    | square wall or ceiling cut-out                            |    | free individual colors 01-29                                 |                                                                                      | drive on                                                                                       |
|   | the supplied jig specifies the cutout dimensions          |   | individual colors: 00 (free of charge), 01-25 (extra charge) |                                                                                     | Dark Sky Compliance                                                                            |
|  | minimum distance (meters) lamp - object                   |  | luminaire part to be colored (F1)                            |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth                                            |  | luminaire part to be colored (F2)                            |                                                                                    | lamp protected against explosion                                                               |
|  | ceiling thickness in mm                                   |  | luminaire part to be colored (F3)                            |                                                                                    | blown glass using traditional methods by master glass blower                                   |
|  | ceiling thickness selection                               |  | luminaire part to be colored (F4)                            |                                                                                    | acoustic material                                                                              |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5)                            |                                                                                    | protection class I, protection insulation                                                      |
|  | included or excluded LED driver/transformer/control gear  |  | color of 3-circuit adaptor                                   |                                                                                    | protection class II, protection insulation                                                     |
|  | separately switchable                                     |  | indirect diffuser                                            |                                                                                    | ETL Certified to UL and CSA Standards                                                          |
|  | sensor                                                    |  | direct diffuser                                              |                                                                                    | UL Certified to UL and CSA Standards                                                           |
|  | remote control                                            |  | ball-proof (upon request)                                    |                                                                                    | CSA Certified to UL and CSA Standards                                                          |
|  | available upon request                                    |  | accessory                                                    |                                                                                    | Certified for North American Standards                                                         |

## IP RATING

|                                                                                   |                                                                                                                                                  |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
|  | protected against ingress of solid bodies greater than 12.5mm (finger)                                                                           |
|  | protected against ingress of solid bodies greater than 2.5mm<br>protected against sprays of water up to 60 degrees from the vertical (rain)      |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>no protection against the ingress of moisture                               |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire)<br>protected against water splashed from all directions                        |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas)<br>protected against water splashed from all directions              |
|  | protected against ingress of dust<br>protected against jets of water                                                                             |
|  | protected against ingress of dust<br>protected against powerful jets of water or heavy seas                                                      |
|  | protected against ingress of dust<br>protected against immersion of water between 15cm - 1m for 30 minutes                                       |
|  | protected against ingress of dust<br>protected against immersion of water under pressure for long periods                                        |

## IK RATING

|                                                                                     |                                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)  |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)   |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)  |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)  |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)    |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)     |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)     |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)    |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)    |