

TOY SURFACE

D83137

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL

Shape: Rectangle
Length (mm): 250
Length (in): 9 ⁷/₁₆"
Height (mm): 70
Height (in): 2 ³/₄"
Extension (mm): 85
Extension (in): 3 ¹/₄"
Light Distribution: Direct / Indirect
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Frost White Glass
Fixture Finish: WHI
Fixture Material: Metal

ELECTRICAL


Number of Lamps: 1
Lamp Type: CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 26
Max. Wattage Per Lamp (W): 26
Lamp Base: GX24-q3
Dimming: Non-Dimmable
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

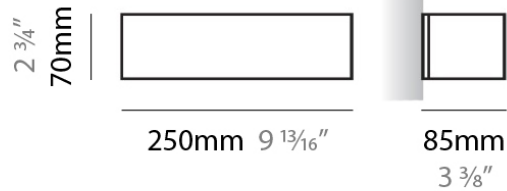

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

TOY SURFACE

D83138

GENERAL

Series: Toy
 Brand: Panzeri
 Division: Design
 Mounting Type: Surface
 Mounting Location: Wall
 Subcategory: Ambient

PHYSICAL

Shape: Rectangle
 Length (mm): 250
 Length (in): 9 7/8
 Height (mm): 70
 Height (in): 2 3/4
 Extension (mm): 85
 Extension (in): 3 3/4
 Light Distribution: Direct / Indirect
 Weight (kg): 0.9
 Weight (lbs): 2
 Diffuser: Frost White Glass
 Fixture Finish: SST
 Fixture Material: Metal

ELECTRICAL



Number of Lamps: 1
 Lamp Type: CFL
 Bulb Included: Bulb Not Included
 Total Output Wattage (W): 26
 Max. Wattage Per Lamp (W): 26
 Lamp Base: GX24-q3
 Driver Included: Yes
 Driver Type: Ballast - 120Vac - Non-dimming
 Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP40

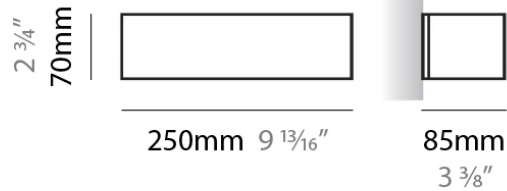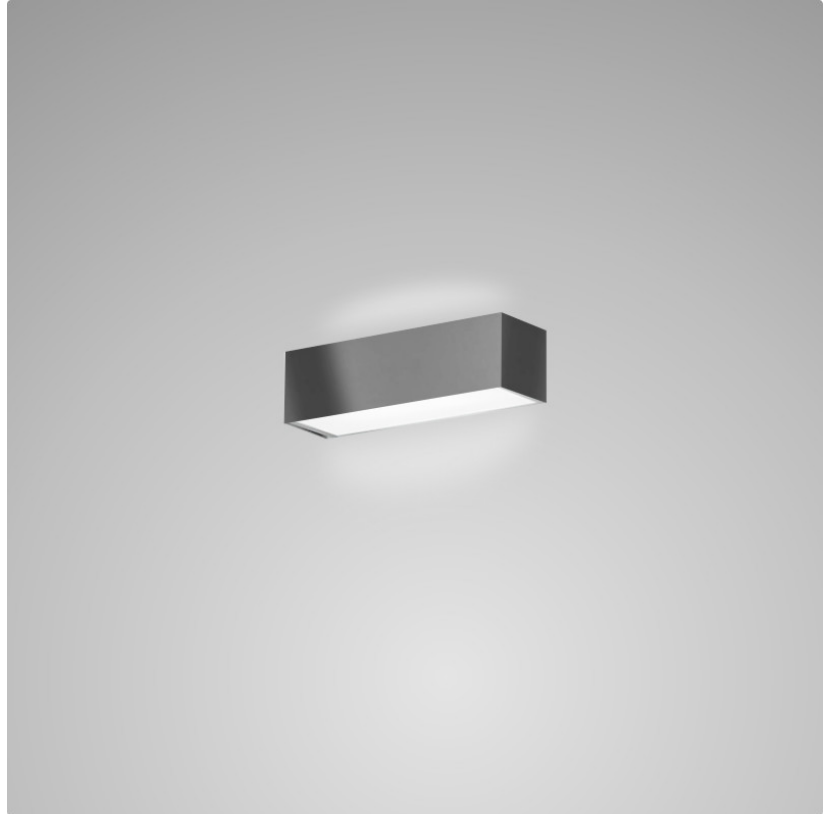

TOY SURFACE

D83139

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL

Shape: Rectangle
Length (mm): 250
Length (in): 9 ⁷/₁₆
Height (mm): 70
Height (in): 2 ³/₄
Extension (mm): 85
Extension (in): 3 ¹/₄
Light Distribution: Direct / Indirect
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Frost White Glass
Fixture Finish: SST
Fixture Material: Metal

ELECTRICAL



Number of Lamps: 1
Lamp Type: CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 26
Max. Wattage Per Lamp (W): 26
Lamp Base: GX24-q3
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

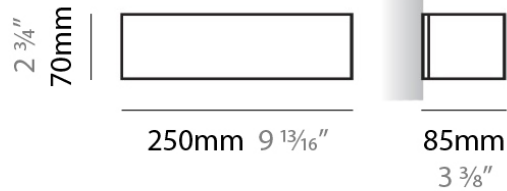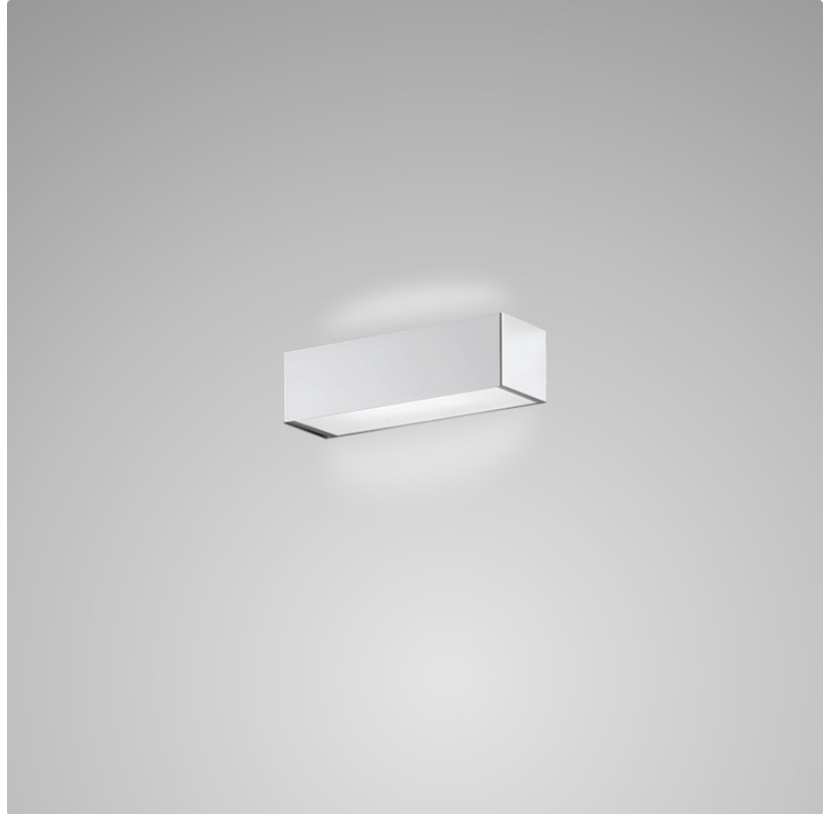

TOY SURFACE

D83140

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL

Shape: Rectangle
Length (mm): 610
Length (in): 24
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 2.7
Weight (lbs): 6
Diffuser: Frost White Glass
Fixture Finish: WHI
Fixture Material: Metal

ELECTRICAL



Number of Lamps: 1
Lamp Type: LED Retrofit / CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 26 / 55
Max. Wattage Per Lamp (W): 26 / 55
Lamp Base: 2GX13
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Ballast - Universal - Non-dimming
Input Voltage (V): 120 - 277

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

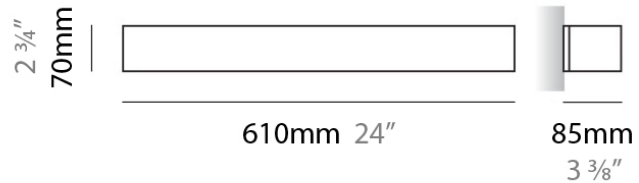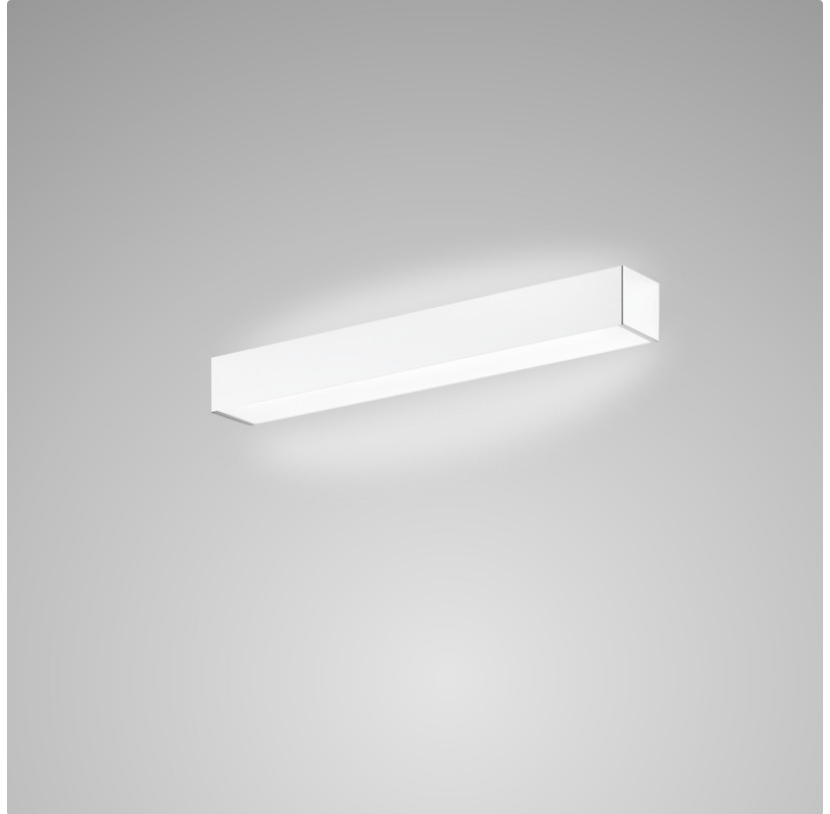

TOY SURFACE

D83141

GENERAL

Series: Toy _____
Brand: Panzeri _____
Division: Design _____
Mounting Type: Surface _____
Mounting Location: Wall _____
Subcategory: Ambient _____

PHYSICAL

Shape: Rectangle _____
Length (mm): 610 _____
Length (in): 24 _____
Height (mm): 70 _____
Height (in): 2 3/4 _____
Extension (mm): 85 _____
Extension (in): 3 3/8 _____
Light Distribution: Direct / Indirect _____
Weight (kg): 2.7 _____
Weight (lbs): 6 _____
Diffuser: Frost White Glass _____
Fixture Finish: SST _____
Fixture Material: Metal _____

ELECTRICAL


Number of Lamps: 1 _____
Lamp Type: LED Retrofit / CFL _____
Bulb Included: Bulb Not Included _____
Total Output Wattage (W): 30 / 55 _____
Max. Wattage Per Lamp (W): 30 / 55 _____
Lamp Base: GX24-q3 _____
Driver Included: Yes _____
Driver Type: Ballast - 120Vac - Non-dimming _____
Input Voltage (V): 120 _____

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
IP rating: IP40 _____

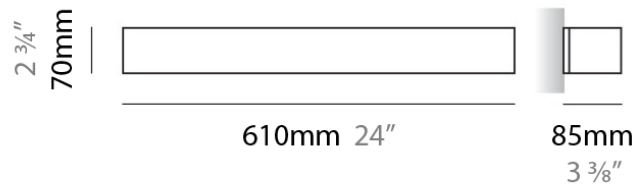

TOY SURFACE

D83142

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL

Shape: Rectangle
Length (mm): 610
Length (in): 24
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 2.7
Weight (lbs): 6
Diffuser: Frost White Glass
Fixture Finish: SST
Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1
Lamp Type: LED Retrofit / CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 30 / 55
Max. Wattage Per Lamp (W): 30 / 55
Lamp Base: GX24-q3
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40



| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

TOY SURFACE

D83147-MSS

GENERAL

Series: Toy
 Brand: Panzeri
 Division: Design
 Mounting Type: Surface
 Mounting Location: Wall

PHYSICAL

Shape: Square
 Length (mm): 75
 Length (in): 2 ¹⁵/₁₆
 Height (mm): 75
 Height (in): 2 ¹⁵/₁₆
 Extension (mm): 85
 Extension (in): 3 ³/₈
 Light Distribution: Direct / Indirect
 Weight (kg): 0.6
 Weight (lbs): 1
 Diffuser: Frost White Glass
 Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1
 Lamp Type: LED Retrofit / Halogen
 Bulb Included: Bulb Not Included
 Total Output Wattage (W): 3 / 35
 Max. Wattage Per Lamp (W): 3 / 35
 Lamp Base: G9
 Input Voltage (V): 120


LED

Nominal Lumen (lm): 650

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP20

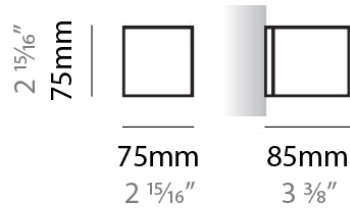

| | |
|----------|-------|
| PROJECT | _____ |
| TYPE | _____ |
| NOTES | _____ |
| QUANTITY | _____ |
| DATE | _____ |

TOY SURFACE

D83147-WHI

GENERAL

Series: Toy _____
Brand: Panzeri _____
Division: Design _____
Mounting Type: Surface _____
Mounting Location: Wall _____

PHYSICAL

Shape: Square _____
Length (mm): 75 _____
Length (in): $2 \frac{15}{16}$ _____
Height (mm): 75 _____
Height (in): $2 \frac{15}{16}$ _____
Extension (mm): 85 _____
Extension (in): $3 \frac{3}{8}$ _____
Light Distribution: Direct / Indirect _____
Weight (kg): 0.6 _____
Weight (lbs): 1 _____
Diffuser: Frost White Glass _____
Fixture Material: Metal _____

ELECTRICAL


Number of Lamps: 1 _____
Lamp Type: LED Retrofit / Halogen _____
Bulb Included: Bulb Not Included _____
Total Output Wattage (W): 3 / 35 _____
Max. Wattage Per Lamp (W): 3 / 35 _____
Lamp Base: G9 _____
Input Voltage (V): 120 _____

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
IP rating: IP20 _____

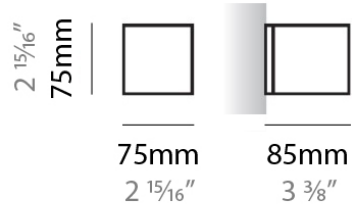

TOY SURFACE

D83281-MSS

GENERAL

Series: Toy

Brand: Panzeri

Division: Design

Mounting Type: Surface

Mounting Location: Wall

PHYSICAL

Shape: Rectangle

Length (mm): 250

Length (in): $9 \frac{13}{16}$

Height (mm): 70

Height (in): $2 \frac{3}{4}$

Extension (mm): 85

Extension (in): $3 \frac{3}{8}$

Light Distribution: Direct / Indirect

Weight (kg): 0.82

Weight (lbs): 1.8

Diffuser: Frost White Glass

Fixture Material: Metal

ELECTRICAL

Lamp Type: LED

Input Wattage (W): 13

Total Output Wattage (W): 12

Driver Included: Yes

Driver Location: Integrated

Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately)

LED

Color Temperature (°K): 3000

Max. Delivered Lumen (lm): 938


CRI: >80 CRI

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP20

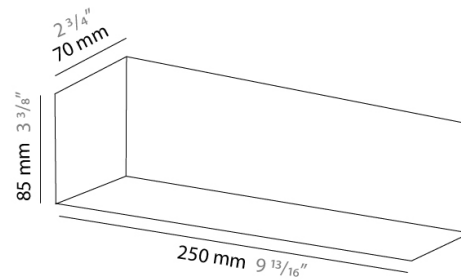

TOY SURFACE

D83281-PSS

GENERAL

Series: Toy _____

Brand: Panzeri _____

Division: Design _____

Mounting Type: Surface _____

Mounting Location: Wall _____

PHYSICAL

Shape: Rectangle _____

Length (mm): 250 _____

Length (in): $9 \frac{13}{16}$ _____

Height (mm): 70 _____

Height (in): $2 \frac{3}{4}$ _____

Extension (mm): 85 _____

Extension (in): $3 \frac{3}{8}$ _____

Light Distribution: Direct / Indirect _____

Weight (kg): 0.82 _____

Weight (lbs): 1.8 _____

Diffuser: Frost White Glass _____

Fixture Material: Metal _____

ELECTRICAL

Lamp Type: LED _____

Input Wattage (W): 13 _____

Total Output Wattage (W): 12 _____

Driver Included: Yes _____

Driver Location: Integrated _____

Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately) _____

LED

Color Temperature (°K): 3000 _____

Max. Delivered Lumen (lm): 938 _____



CRI: >80 CRI _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____

IP rating: IP20 _____

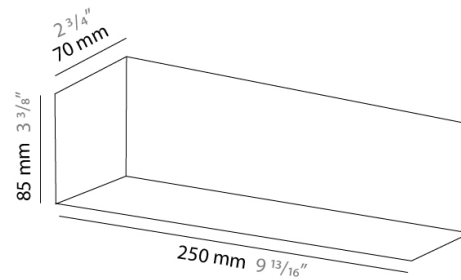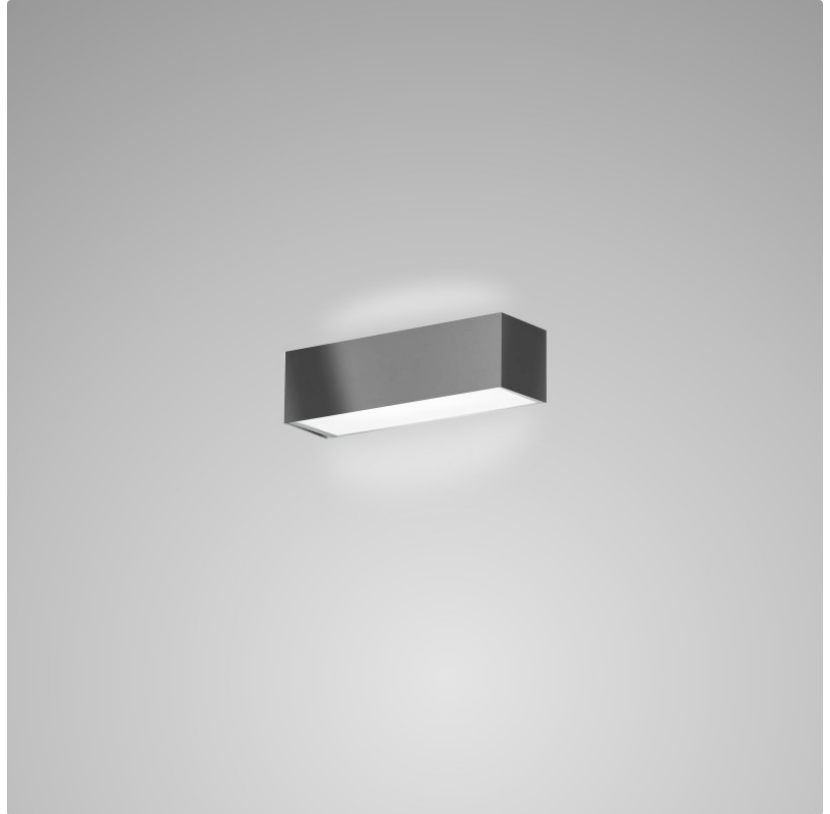

TOY SURFACE

D83281-WHI

GENERAL

Series: Toy _____

Brand: Panzeri _____

Division: Design _____

Mounting Type: Surface _____

Mounting Location: Wall _____

PHYSICAL

Shape: Rectangle _____

Length (mm): 250 _____

Length (in): $9 \frac{13}{16}$ _____

Height (mm): 70 _____

Height (in): $2 \frac{3}{4}$ _____

Extension (mm): 85 _____

Extension (in): $3 \frac{3}{8}$ _____

Light Distribution: Direct / Indirect _____

Weight (kg): 0.82 _____

Weight (lbs): 1.8 _____

Diffuser: Frost White Glass _____

Fixture Material: Metal _____

ELECTRICAL

Lamp Type: LED _____

Input Wattage (W): 13 _____

Total Output Wattage (W): 12 _____

Driver Included: Yes _____

Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately) _____

LED

Color Temperature (°K): 3000 _____

Max. Delivered Lumen (lm): 938 _____

Nominal Lumen (lm): 2 x 730lm _____



CRI: >80 CRI _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____

IP rating: IP20 _____

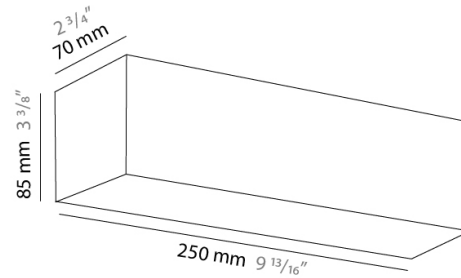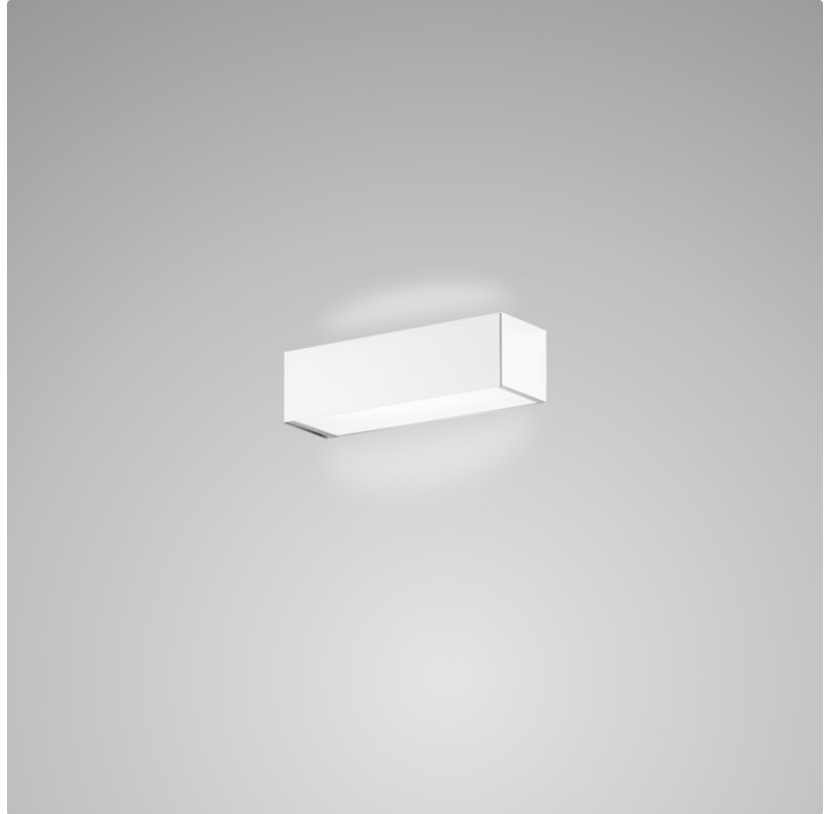

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

TOY SURFACE

D83285

GENERAL

Series: Toy
 Brand: Panzeri
 Division: Design
 Mounting Type: Surface
 Mounting Location: Wall
 Subcategory: Ambient

PHYSICAL

Shape: Rectangle
 Length (mm): 250
 Length (in): 9 7/8
 Height (mm): 70
 Height (in): 2 3/4
 Extension (mm): 85
 Extension (in): 3 1/4
 Light Distribution: Direct / Indirect
 Weight (kg): 0.9
 Weight (lbs): 2
 Diffuser: Frost White Glass
 Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1
 Lamp Type: LED
 Total Output Wattage (W): 12
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Constant Current
 Driver Class: Class 2
 Input Voltage (V): 120
 Upon Request: (Dimming and 277V options available with remote driver sold separately)



LED

Color Temperature (°K): 3000
 Nominal Lumen (lm): 2 x 730
 CRI: >80 CRI

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP40

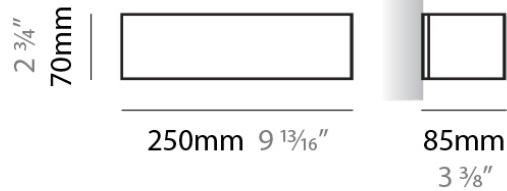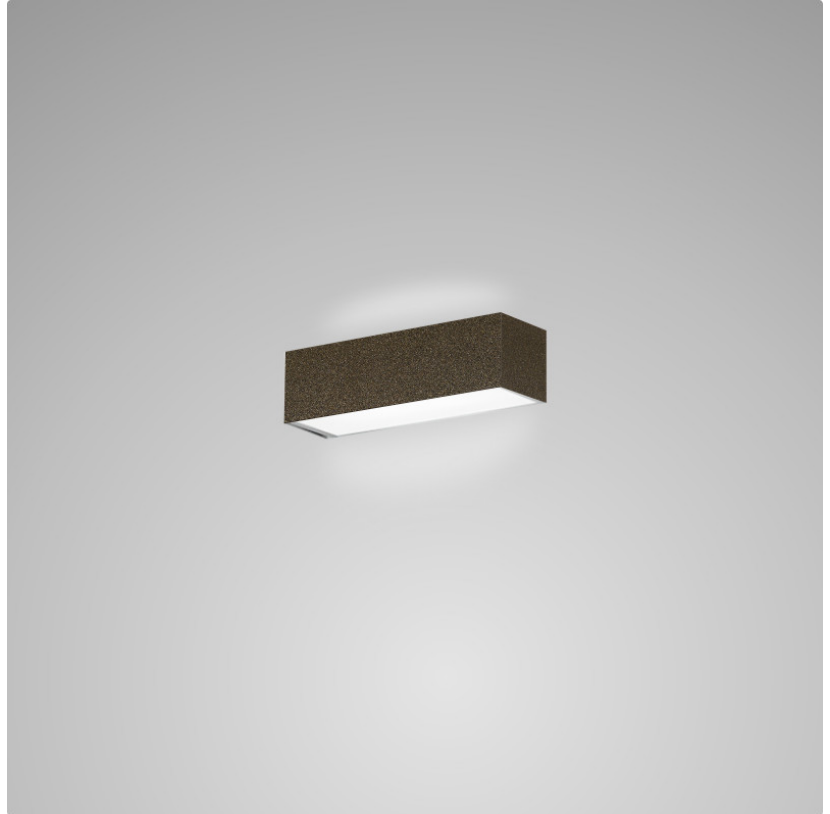

TOY SURFACE

D83286-PSS

GENERAL

Series: Toy _____
Brand: Panzeri _____
Division: Design _____
Mounting Type: Surface _____
Mounting Location: Wall _____

PHYSICAL

Shape: Rectangle _____
Length (mm): 610 _____
Length (in): 24 _____
Height (mm): 70 _____
Height (in): 2 3/4 _____
Extension (mm): 85 _____
Extension (in): 3 3/8 _____
Light Distribution: Direct / Indirect _____
Weight (kg): 1.8 _____
Weight (lbs): 4 _____
Diffuser: Frost White Glass _____
Fixture Material: Metal _____

ELECTRICAL

Lamp Type: LED _____
Input Wattage (W): 35 _____
Driver Included: Yes _____
Driver Type: Integral LED driver, 500mA (Dimming and 277V options available with remote driver sold separately) _____


LED

Color Temperature (°K): 3000 _____
Max. Delivered Lumen (lm): 2814 _____
CRI: >80 CRI _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
IP rating: IP20 _____

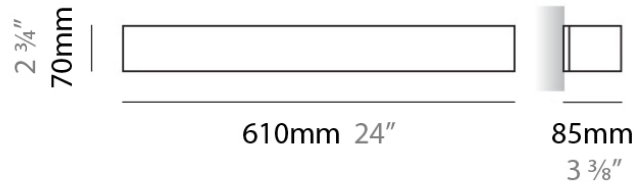

LEGEND

| | | | | | |
|--|---|---|--|---|--|
|  | floor-mounted |  | pivotal |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
|  | wall and ceiling: recessed and surface mounted |  | rotating |  | warm dim / natural dimming LED |
|  | ceiling-mounted and wall-mounted |  | illuminate tilted |  | rechargeable battery powered |
|  | wall-mounted |  | color of suspension cable |  | fixture with natural vivid LED (upon request) |
|  | omni-directional light distribution |  | length of suspension cable |  | color rendering index |
|  | direct light distribution |  | reflector degree selection |  | color temperature |
|  | direct/indirect light distribution |  | super spot |  | lumen (luminous flux) |
|  | indirect light distribution |  | lens |  | efficacy (lumens per watt) |
|  | asymmetric light distribution |  | lens pack |  | Unified Glare Rating (UGR) range from 5-40 |
|  | aura light distribution |  | shine ring |  | marine grade (AISI 316 stainless steel) |
|  | round wall or ceiling cut-out |  | integrated shine ring with diffuser |  | walk on |
|  | square wall or ceiling cut-out |  | free individual colors 01-29 |  | drive on |
|  | the supplied jig specifies the cutout dimensions |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance |
|  | minimum distance (meters) lamp - object |  | luminaire part to be colored (F1) |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth |  | luminaire part to be colored (F2) |  | lamp protected against explosion |
|  | ceiling thickness in mm |  | luminaire part to be colored (F3) |  | blown glass using traditional methods by master glass blower |
|  | ceiling thickness selection |  | luminaire part to be colored (F4) |  | acoustic material |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5) |  | protection class I, protection insulation |
|  | included or excluded LED driver/transformer/control gear |  | color of 3-circuit adaptor |  | protection class II, protection insulation |
|  | separately switchable |  | indirect diffuser |  | ETL Certified to UL and CSA Standards |
|  | sensor |  | direct diffuser |  | UL Certified to UL and CSA Standards |
|  | remote control |  | ball-proof (upon request) |  | CSA Certified to UL and CSA Standards |
|  | available upon request |  | accessory |  | Certified for North American Standards |

IP RATING

| | |
|---|--|
|  | protected against ingress of solid bodies greater than 12.5mm (finger) |
|  | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
|  | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
|  | protected against ingress of dust protected against jets of water |
|  | protected against ingress of dust protected against powerful jets of water or heavy seas |
|  | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
|  | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| | |
|---|---|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |