


PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 250
Length (in): 9 7⁄8
Height (mm): 70
Height (in): 2 ¾
Extension (mm): 85
Extension (in): 3 ¼
Light Distribution: Direct / Indirect
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Frost White Glass
Fixture Finish: WHI
Fixture Material: Metal
ELECTRICAL
Number of Lamps: 1
Lamp Type: CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 26
Max. Wattage Per Lamp (W): 26
Lamp Base: GX24-q3
Dimming: Non-Dimmable
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120
LED
OPTICAL
RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

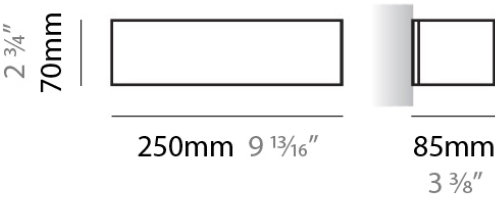

D83138

GENERAL	
Series: Toy	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	
PHYSICAL	
Shape: Rectangle	
Length (mm): 250	
Length (in): 9 7⁄8	
Height (mm): 70	
Height (in): 2 ¾	
Extension (mm): 85	
Extension (in): 3 ¼	
Light Distribution: Direct / Indirect	
Weight (kg): 0.9	
Weight (lbs): 2	
Diffuser: Frost White Glass	
Fixture Finish: SST	
Fixture Material: Metal	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: CFL	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 26	
Max. Wattage Per Lamp (W): 26	
Lamp Base: GX24-q3	
Driver Included: Yes	
Driver Type: Ballast - 120Vac - Non-dimming	
Input Voltage (V): 120	
LED	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP40	


PROJECT
TYPE
NOTES
QUANTITY
DATE

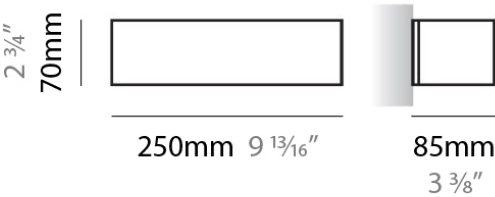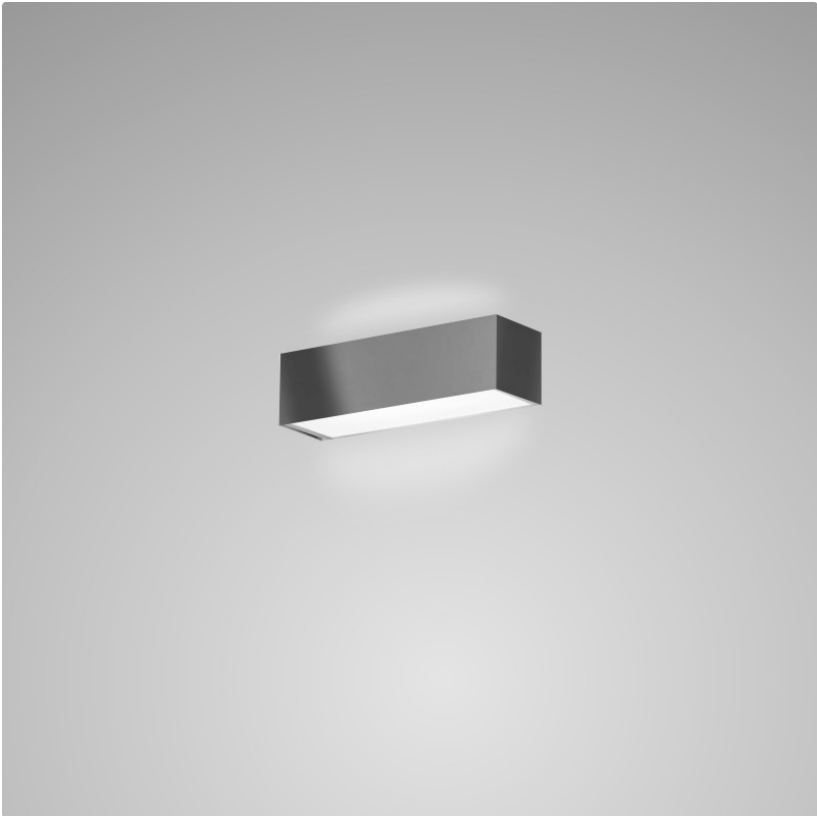

D83139



GENERAL	
Series: Toy	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	
PHYSICAL	
Shape: Rectangle	
Length (mm): 250	
Length (in): 9 7⁄8	
Height (mm): 70	
Height (in): 2 ¾	
Extension (mm): 85	
Extension (in): 3 ¼	
Light Distribution: Direct / Indirect	
Weight (kg): 0.9	
Weight (lbs): 2	
Diffuser: Frost White Glass	
Fixture Finish: SST	
Fixture Material: Metal	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: CFL	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 26	
Max. Wattage Per Lamp (W): 26	
Lamp Base: GX24-q3	
Driver Included: Yes	
Driver Type: Ballast - 120Vac - Non-dimming	
Input Voltage (V): 120	
LED	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP40	

PROJECT
TYPE
NOTES
QUANTITY
DATE

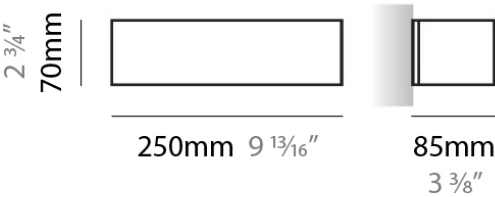

PROJECT
TYPE
NOTES
QUANTITY
DATE

GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 610
Length (in): 24
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 2.7
Weight (lbs): 6
Diffuser: Frost White Glass
Fixture Finish: WHI
Fixture Material: Metal
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 26 / 55
Max. Wattage Per Lamp (W): 26 / 55
Lamp Base: 2GX13
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Ballast - Universal - Non-dimming
Input Voltage (V): 120 - 277
LED
OPTICAL
RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

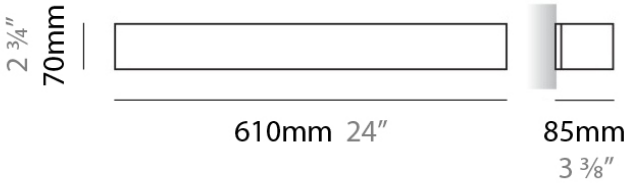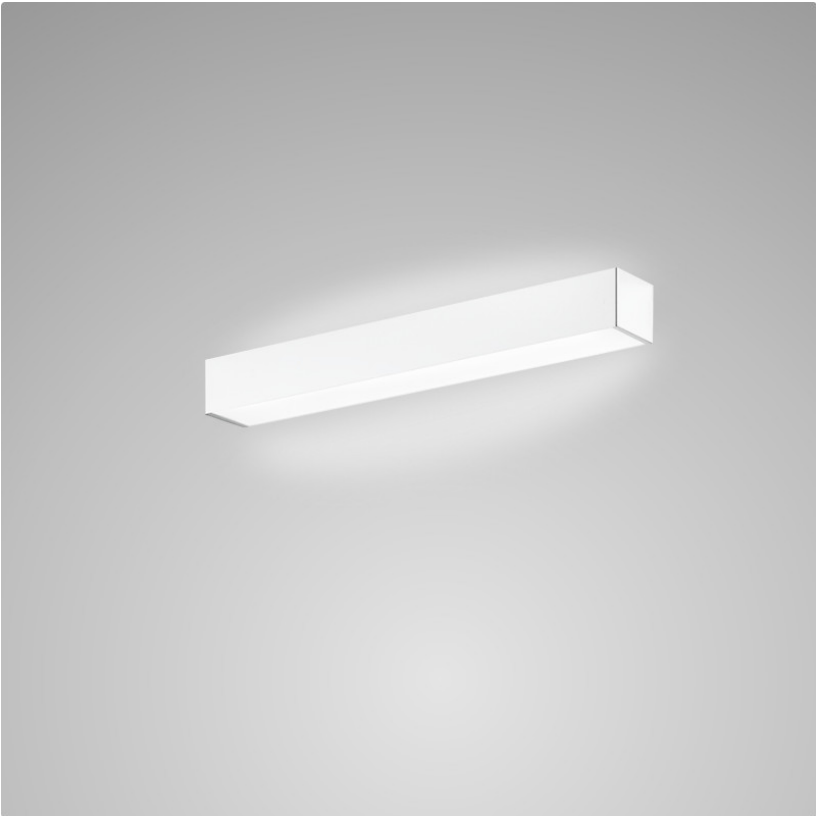

D83141

**GENERAL**  
Series: Toy  
Brand: Panzeri  
Division: Design  
Mounting Type: Surface  
Mounting Location: Wall  
Subcategory: Ambient

**PHYSICAL**  
Shape: Rectangle  
Length (mm): 610  
Length (in): 24  
Height (mm): 70  
Height (in): 2 3/4  
Extension (mm): 85  
Extension (in): 3 3/8  
Light Distribution: Direct / Indirect  
Weight (kg): 2.7  
Weight (lbs): 6  
Diffuser: Frost White Glass  
Fixture Finish: SST  
Fixture Material: Metal


**ELECTRICAL**  
Number of Lamps: 1  
Lamp Type: LED Retrofit / CFL  
Bulb Included: Bulb Not Included  
Total Output Wattage (W): 30 / 55  
Max. Wattage Per Lamp (W): 30 / 55  
Lamp Base: GX24-q3  
Driver Included: Yes  
Driver Type: Ballast - 120Vac - Non-dimming  
Input Voltage (V): 120

LED

OPTICAL

**RATINGS AND CERTIFICATIONS**  
Certified By: CSA Certified to UL and CSA Standards  
IP rating: IP40

PROJECT
TYPE
NOTES
QUANTITY
DATE

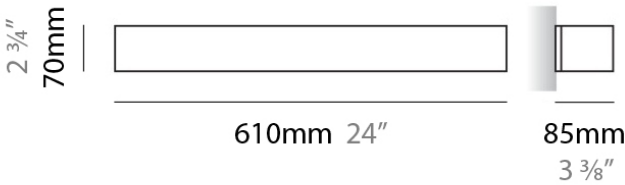

PROJECT
TYPE
NOTES
QUANTITY
DATE

**GENERAL**

Series: Toy

Brand: Panzeri

Division: Design

Mounting Type: Surface

Mounting Location: Wall

Subcategory: Ambient

**PHYSICAL**

Shape: Rectangle

Length (mm): 610

Length (in): 24

Height (mm): 70

Height (in): 2 3/4

Extension (mm): 85

Extension (in): 3 3/8

Light Distribution: Direct / Indirect

Weight (kg): 2.7

Weight (lbs): 6

Diffuser: Frost White Glass

Fixture Finish: SST

Fixture Material: Metal

**ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED Retrofit / CFL

Bulb Included: Bulb Not Included

Total Output Wattage (W): 30 / 55

Max. Wattage Per Lamp (W): 30 / 55

Lamp Base: GX24-q3

Driver Included: Yes

Driver Type: Ballast - 120Vac - Non-dimming

Input Voltage (V): 120


**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: CSA Certified to UL and CSA Standards


IP rating: IP40

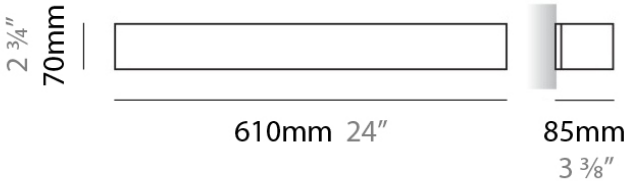

D83147-MSS

GENERAL	
Series: Toy	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
PHYSICAL	
Shape: Square	
Length (mm): 75	
Length (in): 2 15⁄16	
Height (mm): 75	
Height (in): 2 15⁄16	
Extension (mm): 85	
Extension (in): 3 3⁄8	
Light Distribution: Direct / Indirect	
Weight (kg): 0.6	
Weight (lbs): 1	
Diffuser: Frost White Glass	
Fixture Material: Metal	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit / Halogen	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 3 / 35	
Max. Wattage Per Lamp (W): 3 / 35	
Lamp Base: G9	
Input Voltage (V): 120	
LED	
Nominal Lumen (lm): 650	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP20	


PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

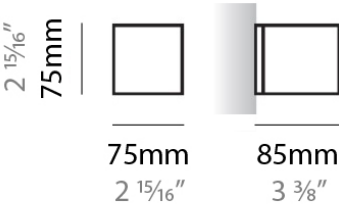

D83147-WHI

GENERAL	
Series: Toy	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
PHYSICAL	
Shape: Square	
Length (mm): 75	
Length (in): 2 15⁄16	
Height (mm): 75	
Height (in): 2 15⁄16	
Extension (mm): 85	
Extension (in): 3 3⁄8	
Light Distribution: Direct / Indirect	
Weight (kg): 0.6	
Weight (lbs): 1	
Diffuser: Frost White Glass	
Fixture Material: Metal	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit / Halogen	
Bulb Included: Bulb Not Included	
Total Output Wattage (W): 3 / 35	
Max. Wattage Per Lamp (W): 3 / 35	
Lamp Base: G9	
Input Voltage (V): 120	
LED	
OPTICAL	
RATINGS AND CERTIFICATIONS	
Certified By: CSA Certified to UL and CSA Standards	
IP rating: IP20	

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

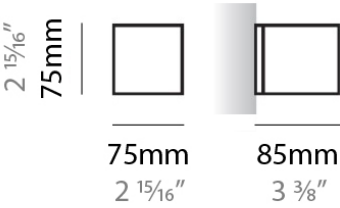



PROJECT
TYPE
NOTES
QUANTITY
DATE

**GENERAL**

Series: Toy

Brand: Panzeri

Division: Design

Mounting Type: Surface

Mounting Location: Wall

Subcategory: Ambient

**PHYSICAL**

Shape: Rectangle

Length (mm): 250

Length (in): 9 7⁄8

Height (mm): 70

Height (in): 2 ¾

Extension (mm): 85

Extension (in): 3 ¼

Light Distribution: Direct / Indirect

Weight (kg): 0.9

Weight (lbs): 2

Diffuser: Frost White Glass

Fixture Material: Metal

**ELECTRICAL**

Number of Lamps: 1

Lamp Type: CFL

Bulb Included: Bulb Not Included

Total Output Wattage (W): 26

Max. Wattage Per Lamp (W): 26

Lamp Base: GX24-q3

Driver Included: Yes

Input Voltage (V): 120


**LED**

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

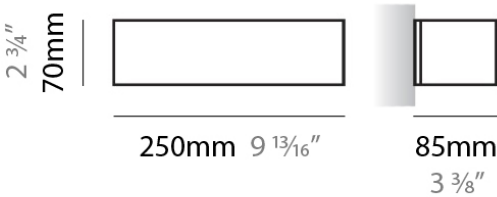

PROJECT
TYPE
NOTES
QUANTITY
DATE

**GENERAL**

Series: Toy

Brand: Panzeri

Division: Design

Mounting Type: Surface

Mounting Location: Wall

Subcategory: Ambient

**PHYSICAL**

Shape: Rectangle

Length (mm): 250

Length (in): 9 7⁄8

Height (mm): 70

Height (in): 2 ¾

Extension (mm): 85

Extension (in): 3 ¼

Light Distribution: Direct / Indirect

Weight (kg): 0.9

Weight (lbs): 2

Diffuser: Frost White Glass

Fixture Material: Metal

**ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED

Total Output Wattage (W): 12

Dimming: Non-Dimmable

Driver Included: Yes

Driver Location: Integrated

Driver Type: Constant Current

Driver Class: Class 2

Input Voltage (V): 120

Upon Request: (Dimming and 277V options available with remote driver sold separately)

**LED**

Color Temperature (°K): 3000

Nominal Lumen (lm): 2 x 730



CRI: >80 CRI

**OPTICAL**

**RATINGS AND CERTIFICATIONS**

Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

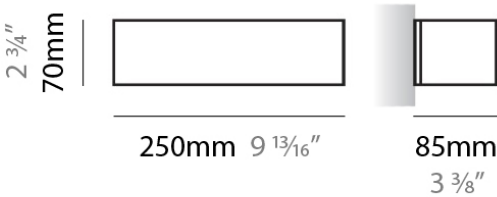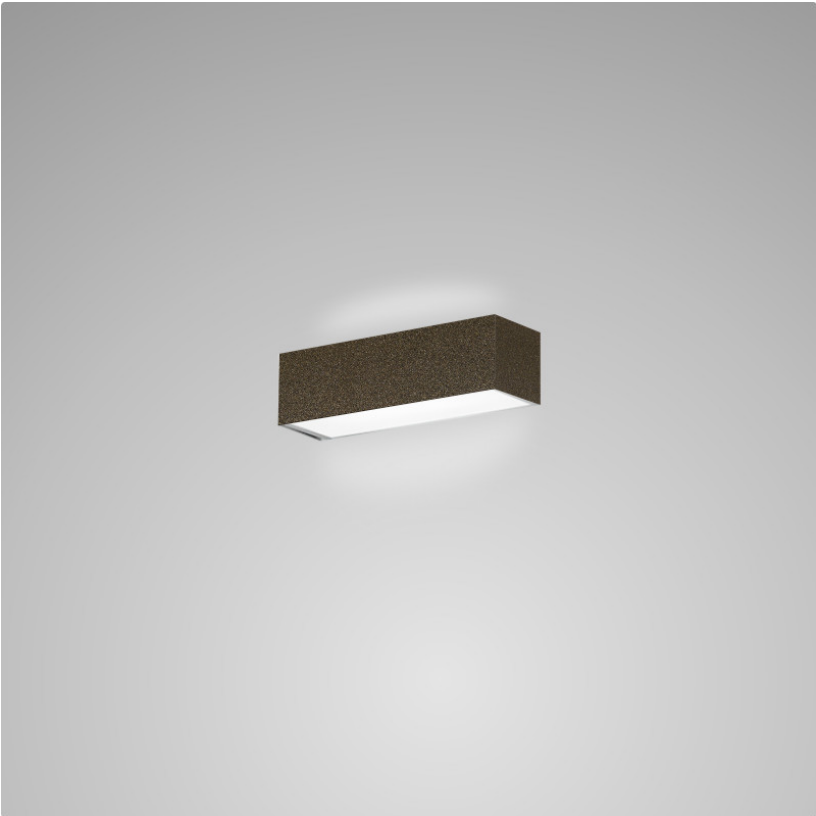

## LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

## IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

## IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)