

TOY SURFACE

D83137

GENERAL

Series: Toy
 Brand: Panzeri
 Division: Design
 Mounting Type: Surface
 Mounting Location: Wall
 Subcategory: Ambient

PHYSICAL

Shape: Rectangle
 Length (mm): 250
 Length (in): 9 7/8
 Height (mm): 70
 Height (in): 2 3/4
 Extension (mm): 85
 Extension (in): 3 1/4
 Light Distribution: Direct / Indirect
 Weight (kg): 0.9
 Weight (lbs): 2
 Diffuser: Frost White Glass
 Fixture Finish: WHI
 Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1
 Lamp Type: CFL
 Bulb Included: Bulb Not Included
 Total Output Wattage (W): 26
 Max. Wattage Per Lamp (W): 26
 Lamp Base: GX24-q3
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Type: Ballast - 120Vac - Non-dimming
 Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP40



TOY SURFACE

D83138

GENERAL

Series: Toy _____
Brand: Panzeri _____
Division: Design _____
Mounting Type: Surface _____
Mounting Location: Wall _____
Subcategory: Ambient _____

PHYSICAL

Shape: Rectangle _____
Length (mm): 250 _____
Length (in): 9 7/8 _____
Height (mm): 70 _____
Height (in): 2 3/4 _____
Extension (mm): 85 _____
Extension (in): 3 1/4 _____
Light Distribution: Direct / Indirect _____
Weight (kg): 0.9 _____
Weight (lbs): 2 _____
Diffuser: Frost White Glass _____
Fixture Finish: SST _____
Fixture Material: Metal _____

ELECTRICAL


Number of Lamps: 1 _____
Lamp Type: CFL _____
Bulb Included: Bulb Not Included _____
Total Output Wattage (W): 26 _____
Max. Wattage Per Lamp (W): 26 _____
Lamp Base: GX24-q3 _____
Driver Included: Yes _____
Driver Type: Ballast - 120Vac - Non-dimming _____
Input Voltage (V): 120 _____

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
IP rating: IP40 _____

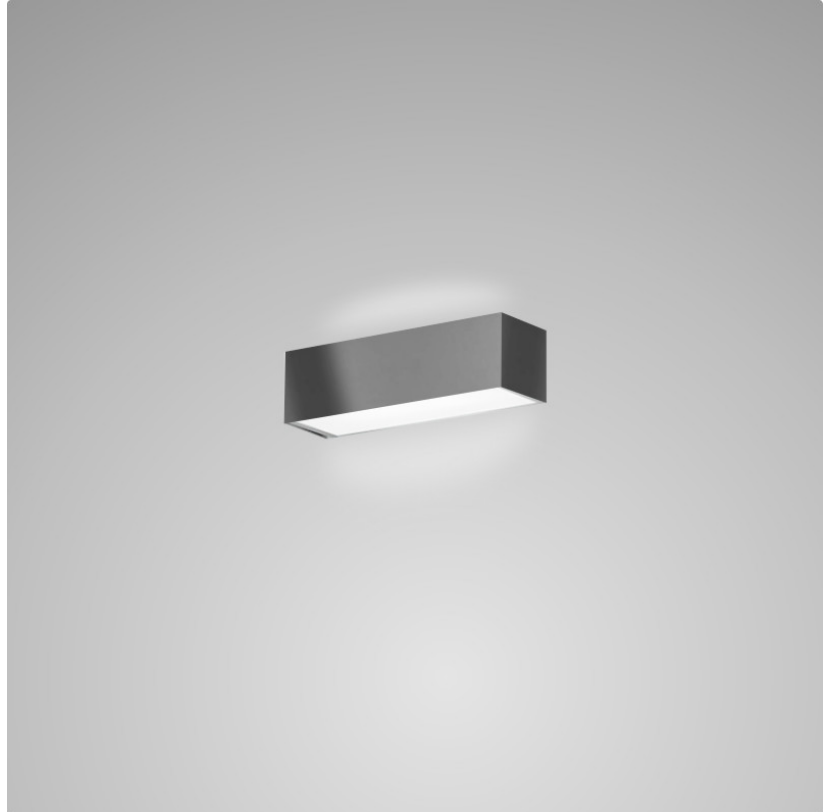

PROJECT
TYPE
NOTES
QUANTITY
DATE

TOY SURFACE

D83139

GENERAL

Series: Toy
 Brand: Panzeri
 Division: Design
 Mounting Type: Surface
 Mounting Location: Wall
 Subcategory: Ambient

PHYSICAL

Shape: Rectangle
 Length (mm): 250
 Length (in): 9 7/8
 Height (mm): 70
 Height (in): 2 3/4
 Extension (mm): 85
 Extension (in): 3 1/4
 Light Distribution: Direct / Indirect
 Weight (kg): 0.9
 Weight (lbs): 2
 Diffuser: Frost White Glass
 Fixture Finish: SST
 Fixture Material: Metal

ELECTRICAL


Number of Lamps: 1
 Lamp Type: CFL
 Bulb Included: Bulb Not Included
 Total Output Wattage (W): 26
 Max. Wattage Per Lamp (W): 26
 Lamp Base: GX24-q3
 Driver Included: Yes
 Driver Type: Ballast - 120Vac - Non-dimming
 Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP40

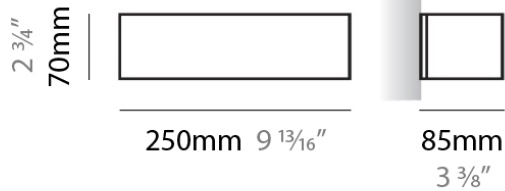

PROJECT
TYPE
NOTES
QUANTITY
DATE

TOY SURFACE

D83140

GENERAL

Series: Toy
 Brand: Panzeri
 Division: Design
 Mounting Type: Surface
 Mounting Location: Wall
 Subcategory: Ambient

PHYSICAL

Shape: Rectangle
 Length (mm): 610
 Length (in): 24
 Height (mm): 70
 Height (in): 2 3/4
 Extension (mm): 85
 Extension (in): 3 3/8
 Light Distribution: Direct / Indirect
 Weight (kg): 2.7
 Weight (lbs): 6
 Diffuser: Frost White Glass
 Fixture Finish: WHI
 Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1
 Lamp Type: LED Retrofit / CFL
 Bulb Included: Bulb Not Included
 Total Output Wattage (W): 26 / 55
 Max. Wattage Per Lamp (W): 26 / 55
 Lamp Base: 2GX13
 Dimming: Non-Dimmable
 Driver Included: Yes
 Driver Location: Integrated
 Driver Type: Ballast - Universal - Non-dimming
 Input Voltage (V): 120 - 277

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
 IP rating: IP40



TOY SURFACE

D83141

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL

Shape: Rectangle
Length (mm): 610
Length (in): 24
Height (mm): 70
Height (in): 2 ³/₄
Extension (mm): 85
Extension (in): 3 ³/₈
Light Distribution: Direct / Indirect
Weight (kg): 2.7
Weight (lbs): 6
Diffuser: Frost White Glass
Fixture Finish: SST
Fixture Material: Metal

ELECTRICAL


Number of Lamps: 1
Lamp Type: LED Retrofit / CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 30 / 55
Max. Wattage Per Lamp (W): 30 / 55
Lamp Base: GX24-q3
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

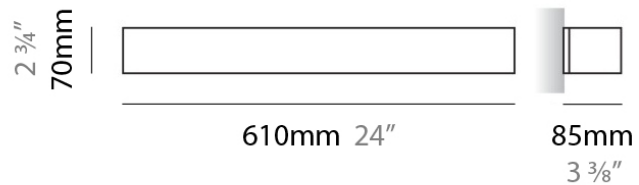

TOY SURFACE

D83142

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL

Shape: Rectangle
Length (mm): 610
Length (in): 24
Height (mm): 70
Height (in): 2 3/4
Extension (mm): 85
Extension (in): 3 3/8
Light Distribution: Direct / Indirect
Weight (kg): 2.7
Weight (lbs): 6
Diffuser: Frost White Glass
Fixture Finish: SST
Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1
Lamp Type: LED Retrofit / CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 30 / 55
Max. Wattage Per Lamp (W): 30 / 55
Lamp Base: GX24-q3
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

TOY SURFACE

D83147-MSS

GENERAL

Series: Toy _____
Brand: Panzeri _____
Division: Design _____
Mounting Type: Surface _____
Mounting Location: Wall _____

PHYSICAL

Shape: Square _____
Length (mm): 75 _____
Length (in): 2 ¹⁵/₁₆ _____
Height (mm): 75 _____
Height (in): 2 ¹⁵/₁₆ _____
Extension (mm): 85 _____
Extension (in): 3 ³/₈ _____
Light Distribution: Direct / Indirect _____
Weight (kg): 0.6 _____
Weight (lbs): 1 _____
Diffuser: Frost White Glass _____
Fixture Material: Metal _____

ELECTRICAL

Number of Lamps: 1 _____
Lamp Type: LED Retrofit / Halogen _____
Bulb Included: Bulb Not Included _____
Total Output Wattage (W): 3 / 35 _____
Max. Wattage Per Lamp (W): 3 / 35 _____
Lamp Base: G9 _____
Input Voltage (V): 120 _____


LED

Nominal Lumen (lm): 650 _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
IP rating: IP20 _____

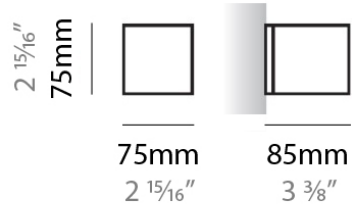

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

TOY SURFACE

D83147-WHI

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall

PHYSICAL

Shape: Square
Length (mm): 75
Length (in): 2 ¹⁵/₁₆
Height (mm): 75
Height (in): 2 ¹⁵/₁₆
Extension (mm): 85
Extension (in): 3 ³/₈
Light Distribution: Direct / Indirect
Weight (kg): 0.6
Weight (lbs): 1
Diffuser: Frost White Glass
Fixture Material: Metal

ELECTRICAL


Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Bulb Included: Bulb Not Included
Total Output Wattage (W): 3 / 35
Max. Wattage Per Lamp (W): 3 / 35
Lamp Base: G9
Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

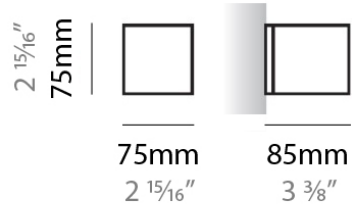

TOY SURFACE

D83281-MSS

GENERAL

Series: Toy _____
Brand: Panzeri _____
Division: Design _____
Mounting Type: Surface _____
Mounting Location: Wall _____

PHYSICAL

Shape: Rectangle _____
Length (mm): 250 _____
Length (in): $9 \frac{13}{16}$ _____
Height (mm): 70 _____
Height (in): $2 \frac{3}{4}$ _____
Extension (mm): 85 _____
Extension (in): $3 \frac{3}{8}$ _____
Light Distribution: Direct / Indirect _____
Weight (kg): 0.82 _____
Weight (lbs): 1.8 _____
Diffuser: Frost White Glass _____
Fixture Material: Metal _____

ELECTRICAL

Lamp Type: LED _____
Input Wattage (W): 13 _____
Total Output Wattage (W): 12 _____
Driver Included: Yes _____
Driver Location: Integrated _____
Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately) _____


LED

Color Temperature (°K): 3000 _____
Max. Delivered Lumen (lm): 938 _____
CRI: >80 CRI _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
IP rating: IP20 _____

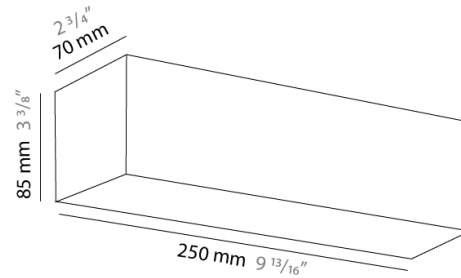

TOY SURFACE

D83281-PSS

GENERAL

Series: Toy _____

Brand: Panzeri _____

Division: Design _____

Mounting Type: Surface _____

Mounting Location: Wall _____

PHYSICAL

Shape: Rectangle _____

Length (mm): 250 _____

Length (in): 9 ¹³/₁₆ _____

Height (mm): 70 _____

Height (in): 2 ³/₄ _____

Extension (mm): 85 _____

Extension (in): 3 ³/₈ _____

Light Distribution: Direct / Indirect _____

Weight (kg): 0.82 _____

Weight (lbs): 1.8 _____

Diffuser: Frost White Glass _____

Fixture Material: Metal _____

ELECTRICAL

Lamp Type: LED _____

Input Wattage (W): 13 _____

Total Output Wattage (W): 12 _____

Driver Included: Yes _____

Driver Location: Integrated _____

Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately) _____

LED

Color Temperature (°K): 3000 _____

Max. Delivered Lumen (lm): 938 _____



CRI: >80 CRI _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____

IP rating: IP20 _____

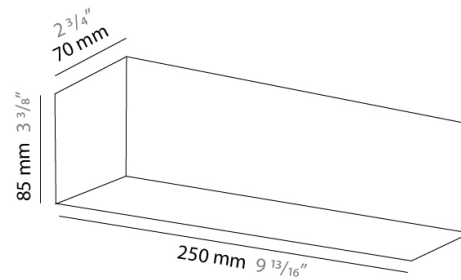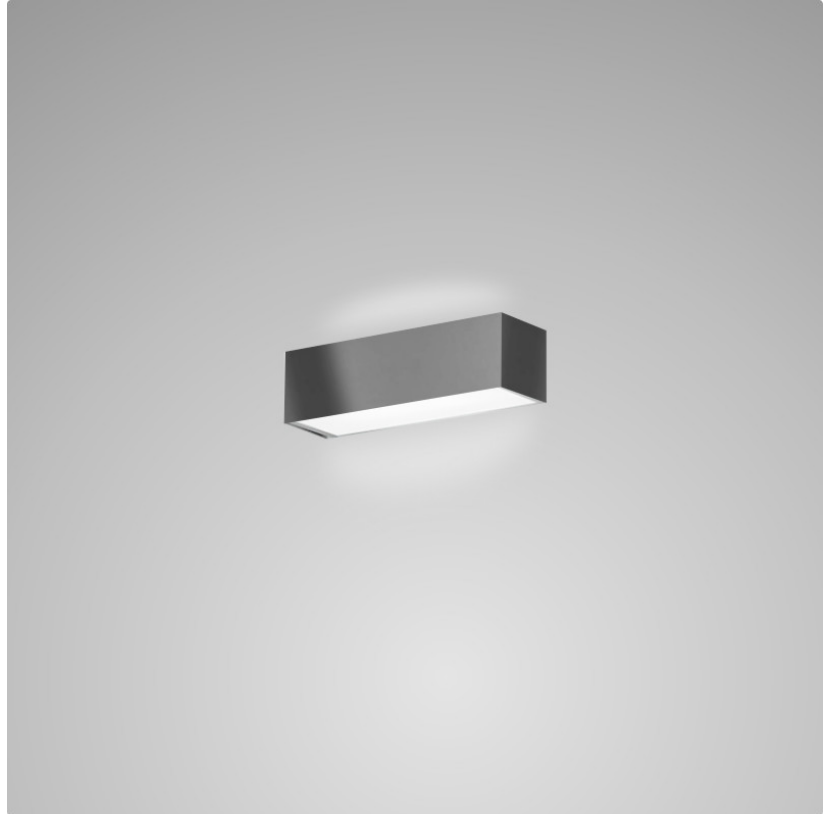

TOY SURFACE

D83281-WHI

GENERAL

Series: Toy _____

Brand: Panzeri _____

Division: Design _____

Mounting Type: Surface _____

Mounting Location: Wall _____

PHYSICAL

Shape: Rectangle _____

Length (mm): 250 _____

Length (in): 9 ¹³/₁₆ _____

Height (mm): 70 _____

Height (in): 2 ³/₄ _____

Extension (mm): 85 _____

Extension (in): 3 ³/₈ _____

Light Distribution: Direct / Indirect _____

Weight (kg): 0.82 _____

Weight (lbs): 1.8 _____

Diffuser: Frost White Glass _____

Fixture Material: Metal _____

ELECTRICAL

Lamp Type: LED _____

Input Wattage (W): 13 _____

Total Output Wattage (W): 12 _____

Driver Included: Yes _____

Driver Type: Integral LED driver, 700mA (Dimming and 277V options available with remote driver sold separately) _____

LED

Color Temperature (°K): 3000 _____

Max. Delivered Lumen (lm): 938 _____

Nominal Lumen (lm): 2 x 730lm _____


CRI: >80 CRI _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____

IP rating: IP20 _____

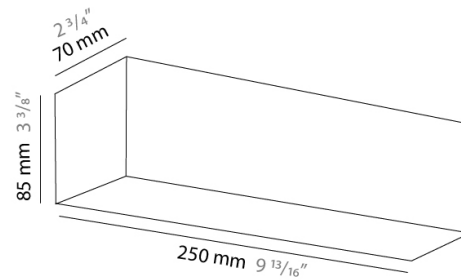

TOY SURFACE

D83285

GENERAL

Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL

Shape: Rectangle
Length (mm): 250
Length (in): 9 ⁷/₁₆
Height (mm): 70
Height (in): 2 ³/₄
Extension (mm): 85
Extension (in): 3 ¹/₄
Light Distribution: Direct / Indirect
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Frost White Glass
Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1
Lamp Type: LED
Total Output Wattage (W): 12
Dimming: Non-Dimmable
Driver Included: Yes
Driver Location: Integrated
Driver Type: Constant Current
Driver Class: Class 2
Input Voltage (V): 120
Upon Request: (Dimming and 277V options available with remote driver sold separately)



LED

Color Temperature (°K): 3000
Nominal Lumen (lm): 2 x 730
CRI: >80 CRI

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40

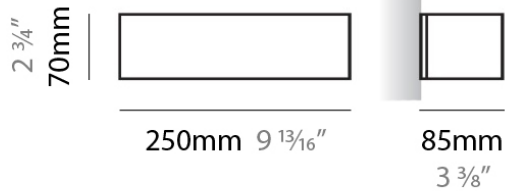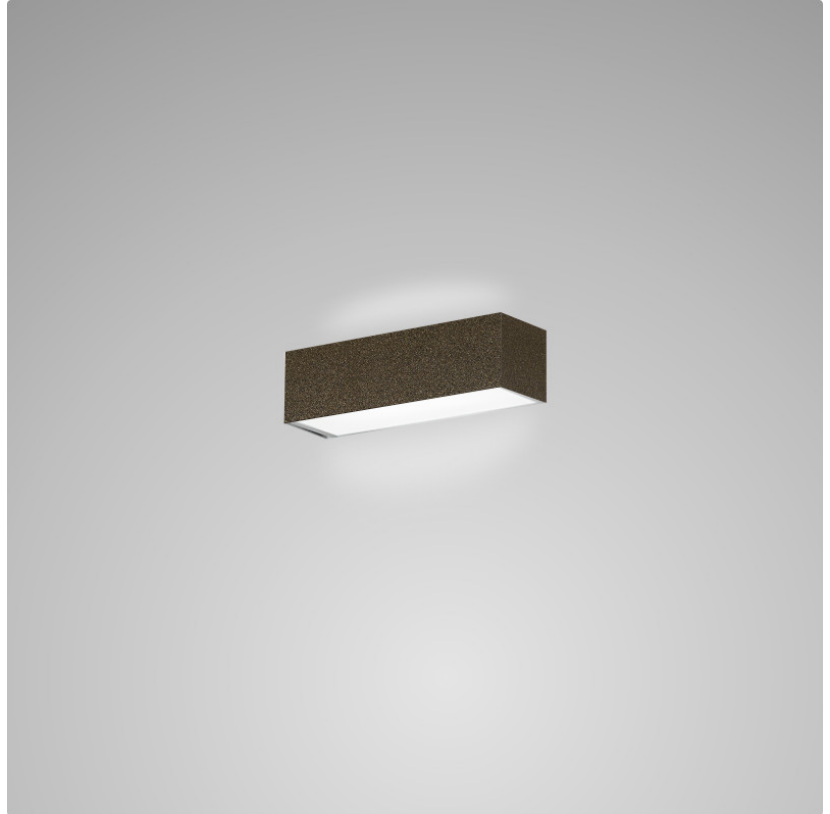

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

TOY SURFACE

D83286-PSS

GENERAL

Series: Toy _____
Brand: Panzeri _____
Division: Design _____
Mounting Type: Surface _____
Mounting Location: Wall _____

PHYSICAL

Shape: Rectangle _____
Length (mm): 610 _____
Length (in): 24 _____
Height (mm): 70 _____
Height (in): 2 3/4 _____
Extension (mm): 85 _____
Extension (in): 3 3/8 _____
Light Distribution: Direct / Indirect _____
Weight (kg): 1.8 _____
Weight (lbs): 4 _____
Diffuser: Frost White Glass _____
Fixture Material: Metal _____

ELECTRICAL

Lamp Type: LED _____
Input Wattage (W): 35 _____
Driver Included: Yes _____
Driver Type: Integral LED driver, 500mA (Dimming and 277V options available with remote driver sold separately) _____


LED

Color Temperature (°K): 3000 _____
Max. Delivered Lumen (lm): 2814 _____
CRI: >80 CRI _____

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards _____
IP rating: IP20 _____

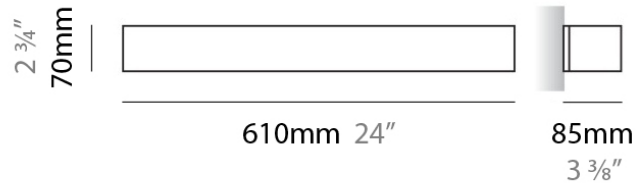

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)