

| | |
|----------|--|
| PROJECT | |
| TYPE | |
| NOTES | |
| QUANTITY | |
| DATE | |

GENERAL

| |
|-------------------------|
| Series: Toy |
| Brand: Panzeri |
| Division: Design |
| Mounting Type: Surface |
| Mounting Location: Wall |
| Subcategory: Ambient |

PHYSICAL

| |
|---------------------------------------|
| Shape: Rectangle |
| Length (mm): 250 |
| Length (in): 9 7⁄8 |
| Height (mm): 70 |
| Height (in): 2 ¾ |
| Extension (mm): 85 |
| Extension (in): 3 ¼ |
| Light Distribution: Direct / Indirect |
| Weight (kg): 0.9 |
| Weight (lbs): 2 |
| Diffuser: Frost White Glass |
| Fixture Finish: WHI |
| Fixture Material: Metal |

ELECTRICAL


| |
|---|
| Number of Lamps: 1 |
| Lamp Type: CFL |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 26 |
| Max. Wattage Per Lamp (W): 26 |
| Lamp Base: GX24-q3 |
| Dimming: Non-Dimmable |
| Driver Included: Yes |
| Driver Type: Ballast - 120Vac - Non-dimming |
| Input Voltage (V): 120 |

LED

OPTICAL

RATINGS AND CERTIFICATIONS

| |
|---|
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40 |

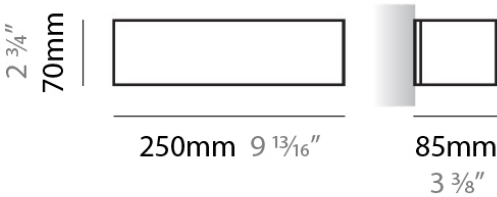

D83138

GENERAL
Series: Toy
Brand: Panzeri
Division: Design
Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient

PHYSICAL
Shape: Rectangle
Length (mm): 250
Length (in): 9 7⁄8
Height (mm): 70
Height (in): 2 ¾
Extension (mm): 85
Extension (in): 3 ¼
Light Distribution: Direct / Indirect
Weight (kg): 0.9
Weight (lbs): 2
Diffuser: Frost White Glass
Fixture Finish: SST
Fixture Material: Metal

ELECTRICAL
Number of Lamps: 1
Lamp Type: CFL
Bulb Included: Bulb Not Included
Total Output Wattage (W): 26
Max. Wattage Per Lamp (W): 26
Lamp Base: GX24-q3
Driver Included: Yes
Driver Type: Ballast - 120Vac - Non-dimming
Input Voltage (V): 120



LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards
IP rating: IP40


| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

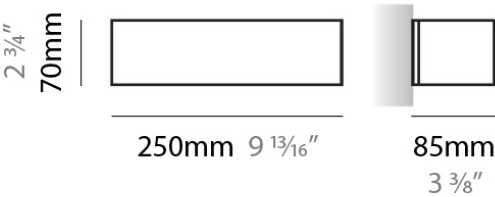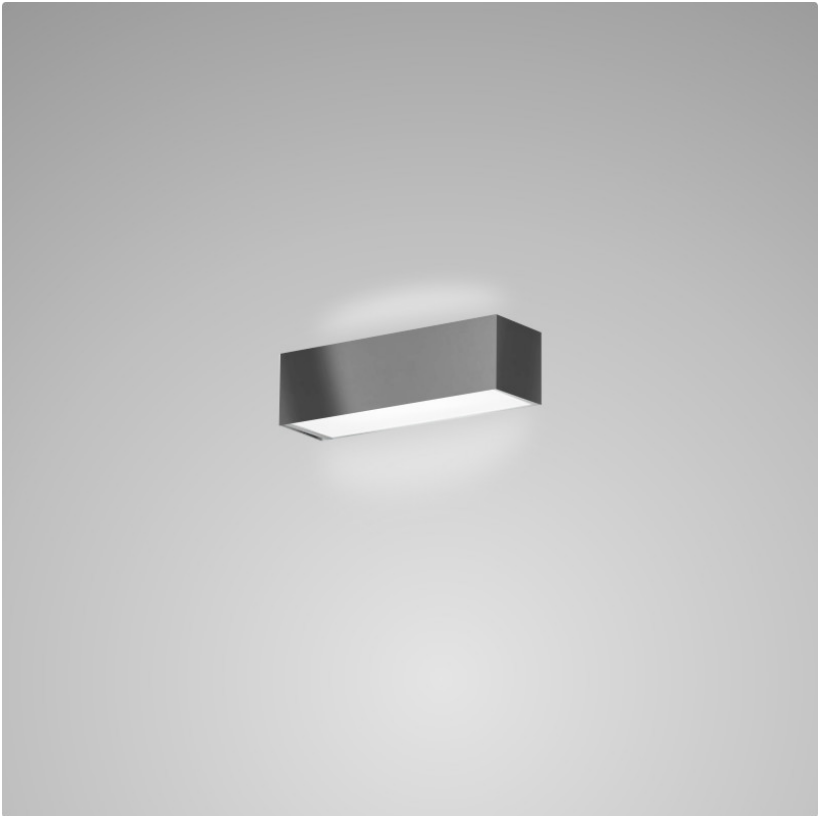

D83139


| | |
|---|--|
| GENERAL | |
| Series: Toy | |
| Brand: Panzeri | |
| Division: Design | |
| Mounting Type: Surface | |
| Mounting Location: Wall | |
| Subcategory: Ambient | |
| PHYSICAL | |
| Shape: Rectangle | |
| Length (mm): 250 | |
| Length (in): 9 7⁄8 | |
| Height (mm): 70 | |
| Height (in): 2 ¾ | |
| Extension (mm): 85 | |
| Extension (in): 3 ¼ | |
| Light Distribution: Direct / Indirect | |
| Weight (kg): 0.9 | |
| Weight (lbs): 2 | |
| Diffuser: Frost White Glass | |
| Fixture Finish: SST | |
| Fixture Material: Metal | |
| ELECTRICAL | |
| Number of Lamps: 1 | |
| Lamp Type: CFL | |
| Bulb Included: Bulb Not Included | |
| Total Output Wattage (W): 26 | |
| Max. Wattage Per Lamp (W): 26 | |
| Lamp Base: GX24-q3 | |
| Driver Included: Yes | |
| Driver Type: Ballast - 120Vac - Non-dimming | |
| Input Voltage (V): 120 | |
| LED | |
| OPTICAL | |
| RATINGS AND CERTIFICATIONS | |
| Certified By: CSA Certified to UL and CSA Standards | |
| IP rating: IP40 | |

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

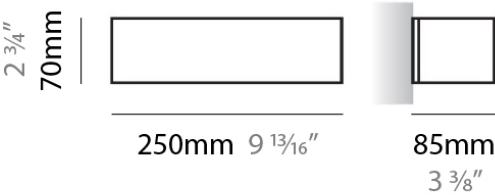

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

| |
|---|
| GENERAL |
| Series: Toy |
| Brand: Panzeri |
| Division: Design |
| Mounting Type: Surface |
| Mounting Location: Wall |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Rectangle |
| Length (mm): 610 |
| Length (in): 24 |
| Height (mm): 70 |
| Height (in): 2 3/4 |
| Extension (mm): 85 |
| Extension (in): 3 3/8 |
| Light Distribution: Direct / Indirect |
| Weight (kg): 2.7 |
| Weight (lbs): 6 |
| Diffuser: Frost White Glass |
| Fixture Finish: WHI |
| Fixture Material: Metal |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit / CFL |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 26 / 55 |
| Max. Wattage Per Lamp (W): 26 / 55 |
| Lamp Base: 2GX13 |
| Dimming: Non-Dimmable |
| Driver Included: Yes |
| Driver Location: Integrated |
| Driver Type: Ballast - Universal - Non-dimming |
| Input Voltage (V): 120 - 277 |
| LED |
| OPTICAL |
| RATINGS AND CERTIFICATIONS |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40 |

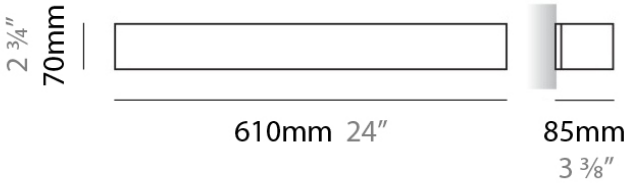

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

GENERAL

| |
|-------------------------|
| Series: Toy |
| Brand: Panzeri |
| Division: Design |
| Mounting Type: Surface |
| Mounting Location: Wall |
| Subcategory: Ambient |

PHYSICAL

| |
|---------------------------------------|
| Shape: Rectangle |
| Length (mm): 610 |
| Length (in): 24 |
| Height (mm): 70 |
| Height (in): 2 3/4 |
| Extension (mm): 85 |
| Extension (in): 3 3/8 |
| Light Distribution: Direct / Indirect |
| Weight (kg): 2.7 |
| Weight (lbs): 6 |
| Diffuser: Frost White Glass |
| Fixture Finish: SST |
| Fixture Material: Metal |

ELECTRICAL


| |
|---|
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit / CFL |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 30 / 55 |
| Max. Wattage Per Lamp (W): 30 / 55 |
| Lamp Base: GX24-q3 |
| Driver Included: Yes |
| Driver Type: Ballast - 120Vac - Non-dimming |
| Input Voltage (V): 120 |

LED

OPTICAL

RATINGS AND CERTIFICATIONS

| |
|---|
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40 |

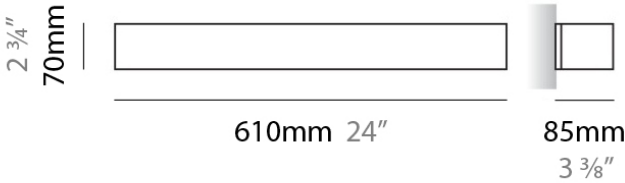

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

GENERAL

Series: Toy

Brand: Panzeri

Division: Design

Mounting Type: Surface

Mounting Location: Wall

Subcategory: Ambient

PHYSICAL

Shape: Rectangle

Length (mm): 610

Length (in): 24

Height (mm): 70

Height (in): 2 3/4

Extension (mm): 85

Extension (in): 3 3/8

Light Distribution: Direct / Indirect

Weight (kg): 2.7

Weight (lbs): 6

Diffuser: Frost White Glass

Fixture Finish: SST

Fixture Material: Metal

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit / CFL

Bulb Included: Bulb Not Included

Total Output Wattage (W): 30 / 55

Max. Wattage Per Lamp (W): 30 / 55

Lamp Base: GX24-q3

Driver Included: Yes

Driver Type: Ballast - 120Vac - Non-dimming

Input Voltage (V): 120


LED

OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

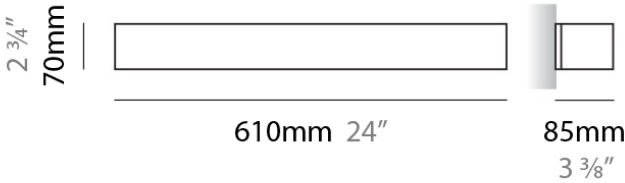

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

| |
|---|
| GENERAL |
| Series: Toy |
| Brand: Panzeri |
| Division: Design |
| Mounting Type: Surface |
| Mounting Location: Wall |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Rectangle |
| Length (mm): 250 |
| Length (in): 9 7⁄8 |
| Height (mm): 70 |
| Height (in): 2 ¾ |
| Extension (mm): 85 |
| Extension (in): 3 ¼ |
| Light Distribution: Direct / Indirect |
| Weight (kg): 0.9 |
| Weight (lbs): 2 |
| Diffuser: Frost White Glass |
| Fixture Material: Metal |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: CFL |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 26 |
| Max. Wattage Per Lamp (W): 26 |
| Lamp Base: GX24-q3 |
| Driver Included: Yes |
| Input Voltage (V): 120 |
| LED |
| OPTICAL |
| RATINGS AND CERTIFICATIONS |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40 |

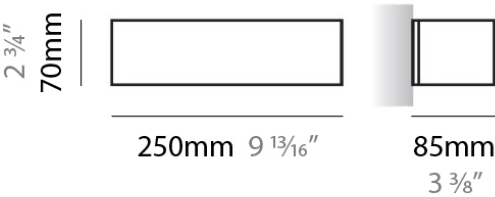

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |


| |
|-------------------------|
| GENERAL |
| Series: Toy |
| Brand: Panzeri |
| Division: Design |
| Mounting Type: Surface |
| Mounting Location: Wall |
| Subcategory: Ambient |

| |
|---------------------------------------|
| PHYSICAL |
| Shape: Rectangle |
| Length (mm): 250 |
| Length (in): 9 7⁄8 |
| Height (mm): 70 |
| Height (in): 2 ¾ |
| Extension (mm): 85 |
| Extension (in): 3 ¼ |
| Light Distribution: Direct / Indirect |
| Weight (kg): 0.9 |
| Weight (lbs): 2 |
| Diffuser: Frost White Glass |
| Fixture Material: Metal |











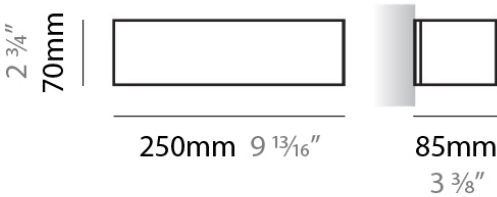


























































| |
|---|
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED |
| Total Output Wattage (W): 12 |
| Dimming: Non-Dimmable |
| Driver Included: Yes |
| Driver Location: Integrated |
| Driver Type: Constant Current |
| Driver Class: Class 2 |
| Input Voltage (V): 120 |
| Upon Request: (Dimming and 277V options available with remote driver sold separately) |

| |
|------------------------------|
| LED |
| Color Temperature (°K): 3000 |
| Nominal Lumen (lm): 2 x 730 |
| CRI: >80 CRI |











| |
|---|
| OPTICAL |
| RATINGS AND CERTIFICATIONS |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP40 |













LEGEND

| | | | | | |
|--|---|---|--|---|--|
|  | floor-mounted |  | pivotal |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
|  | wall and ceiling: recessed and surface mounted |  | rotating |  | warm dim / natural dimming LED |
|  | ceiling-mounted and wall-mounted |  | illuminate tilted |  | rechargeable battery powered |
|  | wall-mounted |  | color of suspension cable |  | fixture with natural vivid LED (upon request) |
|  | omni-directional light distribution |  | length of suspension cable |  | color rendering index |
|  | direct light distribution |  | reflector degree selection |  | color temperature |
|  | direct/indirect light distribution |  | super spot |  | lumen (luminous flux) |
|  | indirect light distribution |  | lens |  | efficacy (lumens per watt) |
|  | asymmetric light distribution |  | lens pack |  | Unified Glare Rating (UGR) range from 5-40 |
|  | aura light distribution |  | shine ring |  | marine grade (AISI 316 stainless steel) |
|  | round wall or ceiling cut-out |  | integrated shine ring with diffuser |  | walk on |
|  | square wall or ceiling cut-out |  | free individual colors 01-29 |  | drive on |
|  | the supplied jig specifies the cutout dimensions |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance |
|  | minimum distance (meters) lamp - object |  | luminaire part to be colored (F1) |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth |  | luminaire part to be colored (F2) |  | lamp protected against explosion |
|  | ceiling thickness in mm |  | luminaire part to be colored (F3) |  | blown glass using traditional methods by master glass blower |
|  | ceiling thickness selection |  | luminaire part to be colored (F4) |  | acoustic material |
|  | dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5) |  | protection class I, protection insulation |
|  | included or excluded LED driver/transformer/control gear |  | color of 3-circuit adaptor |  | protection class II, protection insulation |
|  | separately switchable |  | indirect diffuser |  | ETL Certified to UL and CSA Standards |
|  | sensor |  | direct diffuser |  | UL Certified to UL and CSA Standards |
|  | remote control |  | ball-proof (upon request) |  | CSA Certified to UL and CSA Standards |
|  | available upon request |  | accessory |  | Certified for North American Standards |

IP RATING

| | |
|---|--|
|  | protected against ingress of solid bodies greater than 12.5mm (finger) |
|  | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
|  | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
|  | protected against ingress of dust protected against jets of water |
|  | protected against ingress of dust protected against powerful jets of water or heavy seas |
|  | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
|  | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| | |
|---|---|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |