

DOMINO SUSPENSION

D81045-WHI

GENERAL

 $\frac{\text{Width (in): 3}\frac{1}{1/8}}{\text{Height (mm): 260}}$

Series: Domino
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL
Length (mm): 110
Length (in): 4 5/16
Width (mm): 80

Height (in): 10 ½ Max. Overall Height (mm): 2260

Max. Overall Height (in): 89
Weight (kg): 1.23
Weight (lbs): 2.71
Diffuser: Matte White Blown Glass

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit / Halogen

Bulb Included: Bulb Not Included

Total Output Wattage (W): 13 / 60

Max. Wattage Per Lamp (W): 13 / 60

Lamp Base: G9

Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards











DOMINO SUSPENSION

D81048-BLK

GENERAL

GENERAL
Series: Domino
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant
PHYSICAL
Length (mm): 140
Length (in): $5\frac{1}{2}$
Width (mm): 90
Width (in): 3 % 16
Height (mm): 290
Height (in): 11 $\frac{7}{16}$
Max. Overall Height (mm): 2290
Max. Overall Height (in): 90 $\frac{3}{16}$
Weight (kg): 1.23
Weight (lbs): 2.71
Diffuser: Black Blown Glass
ELECTRICAL
Number of Lamps: 1

LED

OPTICAL

Lamp Base: G9


RATINGS AND CERTIFICATIONS

Lamp Type: LED Retrofit / Halogen Bulb Included: Bulb Not Included Total Output Wattage (W): 13 / 60 Max. Wattage Per Lamp (W): 13 / 60

Certified By: CSA Certified to UL and CSA Standards





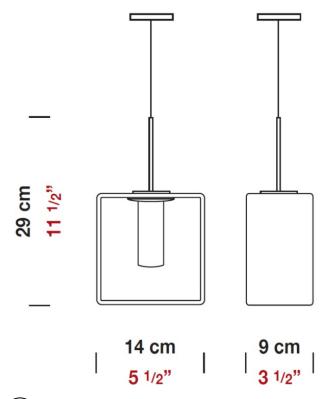





D82033-BLK

GENERAL

PHYSICAL	
Subcategory: Ambient	
Mounting Location: Ceiling	
Mounting Type: Surface	
Division: Design	
Brand: Panzeri	
Series: Domino	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 110
Length (in): 4 ⁵ / ₁₆
Width (mm): 80
Width (in): $3\frac{1}{8}$
Height (mm): 130
Height (in): 5 ½
Extension (in): 5 1/8
Weight (kg): 1.23
Weight (lbs): 2.7
Diffuser: Black Blown Glass
Fixture Material: Glass / Aluminum
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Bulb Included: Bulb Not Included
Total Output Wattage (W): 3 / 35
Max. Wattage Per Lamp (W): 3 / 35

LED


OPTICAL

RATINGS AND CERTIFICATIONS


Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

Lamp Base: G9
Input Voltage (V): 120











D82033-WHI

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	
PHYSICAL	
Shape: Rectangle	

LED


OPTICAL

Lamp Base: G9 Input Voltage (V): 120


RATINGS AND CERTIFICATIONS

Max. Wattage Per Lamp (W): 13 / 60

Certified By: CSA Certified to UL and CSA Standards











D82036-WHI

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Ambient	
DINGLEAL	

Mounting Type: Surface
Mounting Location: Wall
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 140
Length (in): 5 ½
Width (mm): 90
Width (in): 3 ⁹ / ₁₆
Height (mm): 160
Height (in): $6\frac{5}{16}$
Light Distribution: Direct / Indirect
Weight (kg): 1.23
Weight (lbs): 2.71
Diffuser: Matte White Blown Glass
Fixture Material: Glass / Aluminum
ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Profile to alread and Droffe Mark to alread and


Bulb Included: Bulb Not Included Max. Wattage Per Lamp (W): 3 / 35 Lamp Base: G9 Driver Included: No

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards











D82074

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	

Mounting Type: Surface
Mounting Location: Ceiling
PHYSICAL
Shape: Cube
Length (mm): 230
Length (in): 9
Width (mm): 230
Width (in): 9
Height (mm): 160
Height (in): 6 1/4
Light Distribution: Direct
Weight (kg): 1.8
Weight (lbs): 4
Diffuser: Frosted White Glass
Fixture Material: Stainless Steel
ELECTRICAL
Number of Lamps: 2
Lamp Type: LED Retrofit
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W), 6


Total Output Wattage (W): 6 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards





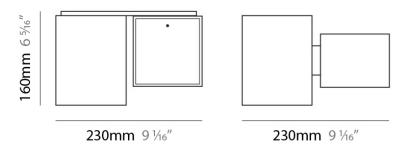





D82075

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	
PHYSICAL	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Rectangle
Length (mm): 330
Length (in): 13
Width (mm): 90
Width (in): 3 ½
Height (mm): 130
Height (in): $5\frac{1}{8}$
Light Distribution: Downlight
Weight (kg): 2.3
Weight (lbs): 5
Diffuser: Frosted White Glass
Fixture Material: Stainless Steel
ELECTRICAL


Diffuser: Frosted Wiffle Glass
Fixture Material: Stainless Steel
ELECTRICAL
Number of Lamps: 3
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 21 / 105
Max. Wattage Per Lamp (W): 7 / 35
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards IP rating: IP40

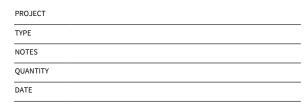









D83103

GENERAL

Series: Domino	
Brand: Panzeri	
Division: Design	
Mounting Type: Surface	
Mounting Location: Wall	
Subcategory: Sconce	

PHYSI	CAL	
Width	(mm):	140

FLECTRICAL	
Fixture Material: Metal	
Diffuser: Orange Glass	
Weight (lbs): 2	
Weight (kg): 0.9	
Extension (in): 3 1/8	
Extension (mm): 98	
Height (in): 6 ¹ / ₄	
Height (mm): 159	
Width (in): 5 ½	


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T4
Bulb Included: Bulb Not Included
Total Output Wattage (W): 18 / 75
Max. Wattage Per Lamp (W): 18 / 75
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards





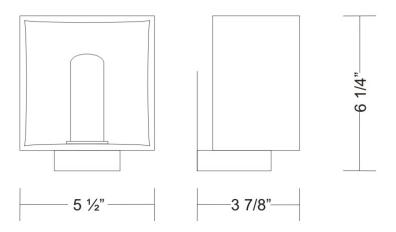





D84079

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Portable

Mounting Location: Table Subcategory: Table **PHYSICAL** Shape: Cube Length (mm): 110 Length (in): 4 1/16 Width (mm): 80 Width (in): 3 1/8 Height (mm): 130 Height (in): $5\frac{1}{8}$ Light Distribution: Omnidirectional Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Matte White Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum **ELECTRICAL** Number of Lamps: 1 Lamp Type: LED Retrofit

Lamp Shape: T4 Bulb Included: Bulb Not Included Total Output Wattage (W): 3 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120


LED

OPTICAL


RATINGS AND CERTIFICATIONS


Certified By: CSA Certified to UL and CSA Standards

IP rating: IP40

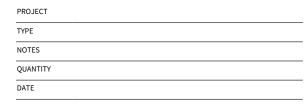







130mm 5 1/8"

80mm 3 1/8"





D84080

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Portable Mounting Location: Table Subcategory: Table

PHYSICAL Shape: Cube Length (mm): 110 Length (in): 4 1/16 Width (mm): 80 Width (in): 3 1/8 Height (mm): 130 Height (in): $5\frac{1}{8}$ Light Distribution: Omnidirectional Weight (kg): 1.23 Weight (lbs): 2.7 Diffuser: Black Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum **ELECTRICAL** Number of Lamps: 1 Lamp Type: LED Retrofit


Lamp Shape: T4 Bulb Included: Bulb Not Included Total Output Wattage (W): 3 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED


OPTICAL


RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

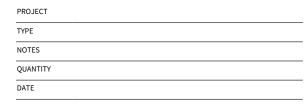







130mm 5 1/8"





D84082

GENERAL

Series: Domino Brand: Panzeri Division: Design Mounting Type: Portable

Mounting Location: Floor Subcategory: Floor **PHYSICAL** Shape: Cube Length (mm): 250 Length (in): 9 $\frac{1}{8}$ Width (mm): 160 Width (in): 6 1/4 Height (mm): 1650 Height (in): 65 Light Distribution: Omnidirectional Weight (kg): 0.5 Weight (lbs): 1 Diffuser: White & White Blown Glass Fixture Finish: Metallic Gray Fixture Material: Glass / Aluminum **ELECTRICAL** Number of Lamps: 2 Lamp Type: LED Retrofit Lamp Shape: T4


Bulb Included: Bulb Not Included Total Output Wattage (W): 6 Max. Wattage Per Lamp (W): 3 Lamp Base: G9 Input Voltage (V): 120

LED

OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards











D84084

GENERAL

Series: Domino
Brand: Panzeri
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Floor

PHYSICAL

Length (mm): 232	
Length (in): 9 1/8	
Width (mm): 165	
Width (in): 6 ½	
Height (mm): 1650	
Height (in): 65	
Weight (kg): 1.23	
Weight (lbs): 2.7	
Diffuser: Matte White Printed Pyrex	
Fixture Material: Metal	

ELECTRICAL


ELECTRICAL
Number of Lamps: 2
Lamp Type: LED Retrofit / Halogen
Lamp Shape: T10
Bulb Included: Bulb Not Included
Total Output Wattage (W): 28 / 120
Max. Wattage Per Lamp (W): 13 / 60
Lamp Base: G9
Input Voltage (V): 120

LED


OPTICAL

RATINGS AND CERTIFICATIONS

Certified By: CSA Certified to UL and CSA Standards

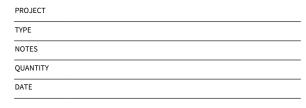



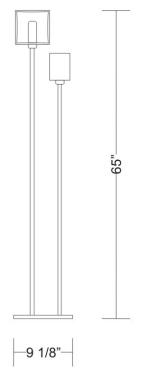



LEGEND

_					·
<u></u>	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
7	wall and ceiling: recessed and surface mounted	J	rotating	0	warm dim / natural dimming LED
\uparrow	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
\rightarrow	wall-mounted	I	color of suspension cable	<u></u>	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	↓	length of suspension cable	CRI	color rendering index
	direct light distribution	Δ	reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(LM)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	3	walk on
\(\sigma\)	square wall or ceiling cut-out		free individual colors 01-29	②	drive on
4	the supplied jig specifies the cutout dimensions	Ċ	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
□ +,*	minimum distance (meters) lamp - object	♦	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
1	ceiling thickness in mm		luminaire part to be colored (F3)	8	blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	♦ ®	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
4	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
४	separately switchable	\odot	indirect diffuser		ETL Certified to UL and CSA Standards
9	sensor	0	direct diffuser	c(UL) us	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	(1)	CSA Certified to UL and CSA Standards
9	available upon request	0	accessory	Z	Certified for North American Standards

IP RATING

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
[P40]	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

ІКО1	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
ІКОЗ	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
IK06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
IK08	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
IK10	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)