

#### D112048-

base number

Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Mariola	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	

PHYSICAL	
Shape: Abstract	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 280	
Height (in): 11	
Light Distribution: Omnidirectional	

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI
Holder Finish: WHI / GSD
Accent Finish: WHI

ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Bulb Included: Bulb Included	
Max. Wattage Per Lamp (W): 20	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

#### LED

### OPTICAL **RATINGS AND CERTIFICATIONS**

Fixture Material: Fabric Cord / Metal

Certified By: Certified for North American Standards IP rating: IP20

PROJECT TYPE SPECIFIER QUANTITY DATE



8 11/16" Ø220mm






Ø500mm 19 11/16"





D112048-



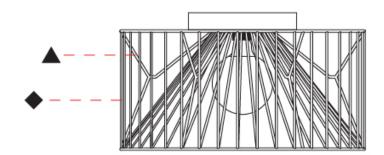





#### D112049-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Mariola	
Brand: Ole	
Division: Design	
Mounting Type: Surface	
Mounting Location: Ceiling	
Subcategory: Ambient	

Mounting Location: Ceiling
Subcategory: Ambient
PHYSICAL
Shape: Abstract
Diameter (mm): 800
Diameter (in): 31 ½
Height (mm): 190
Height (in): $7\frac{1}{2}$
Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

OLV/SIL/STN/TER/WHI
Holder Finish: WHI / GSD
Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

ELECTRICAL

Number of Lamps: 1

Lamp Type: LED Retrofit

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 20

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

#### LED

### OPTICAL

#### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20






8 <sup>1</sup>/<sub>16</sub>" Ø220mm

7 ½" 190mm



160mm 6 5/6"




Ø800mm 31 ½"





D112049-

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	

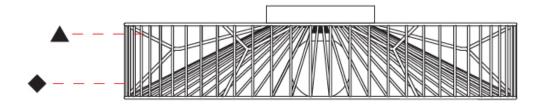





D11403	0-	-	-
base number	Finish	Finish	Finish
	Options	Options	Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### GENERAL

<del></del>
Series: Mariola
Brand: Ole
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

PHYSICAL	
Shape: Abstract	
Diameter (mm): 500	
Diameter (in): 19 11/16	
Height (mm): 1550	
Height (in): 61	

Light Distribution: Omnidirectional
Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS /

OLV / SIL / STN / TER / WHI
Holder Finish: WHI / GSD

Accent Finish: WHI
Fixture Material: Fabric Cord / Metal
Cable Details: 100/100 Cord

Tixture Material. Tablic Cora / Metal	
Cable Details: 100/100 Cord	
ELECTRICAL	
Number of Lamps: 1	
Lamp Type: LED Retrofit	
Lamp Shape: A19	
Bulb Included: Bulb Not Included	
Max. Wattage Per Lamp (W): 15	
Lamp Base: E26	
Input Voltage (V): 120	
Upon Request: 277Vac / GU24	

#### LED


# OPTICAL RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20

PROJECT	
ТҮРЕ	
SPECIFIER	
QUANTITY	
DATE	



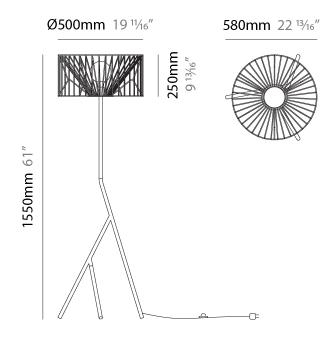






D114030-

ROJECT	
/PE	
PECIFIER	
UANTITY	
ATE	

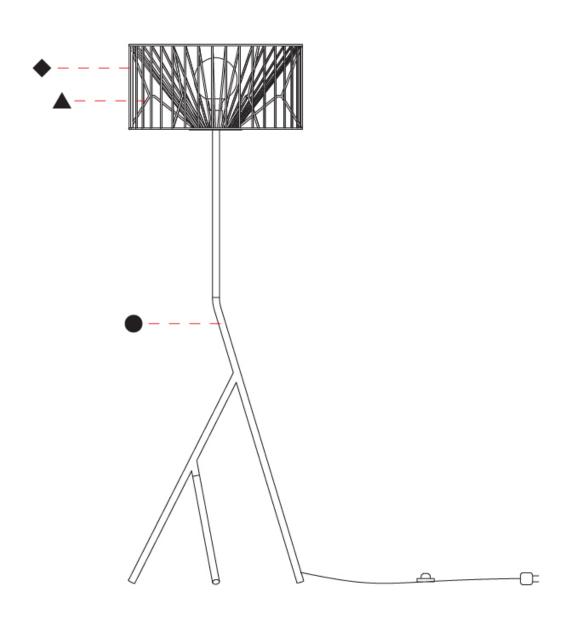





D114031-

base number

Finish Finish Options Options

1.To build a product code in our configurator select the specify button on the base model # product page

2. To build a manual product code on this datasheet choose from the options listed below in blue font and add the suffix to the base model #

#### **GENERAL**

Series: Mariola
Brand: Ole
Division: Design
Mounting Type: Portable
Mounting Location: Floor
Subcategory: Ambient

#### PHYSICAL

Shape: Abstract

Diameter (mm): 500

Diameter (in): 19 11/16

Height (mm): 540

Height (in): 21 1/4

Light Distribution: Omnidirectional

Diffuser: PMMA - Opal

Fixture Finish: BEI / BLK / BLU / COG / DGN / GRY / MRN / MOC / MUS / OLV / SIL / STN / TER / WHI

Holder Finish: WHI / GSD

Accent Finish: WHI

Fixture Material: Fabric Cord / Metal

Cable Details: 220/100 Cord

#### **ELECTRICAL**

Number of Lamps: 1

Lamp Type: LED Retrofit

Lamp Shape: A19

Bulb Included: Bulb Not Included

Max. Wattage Per Lamp (W): 15

Lamp Base: E26

Input Voltage (V): 120

Upon Request: 277Vac / GU24

LED

#### OPTICAL


### RATINGS AND CERTIFICATIONS

Certified By: Certified for North American Standards

IP rating: IP20





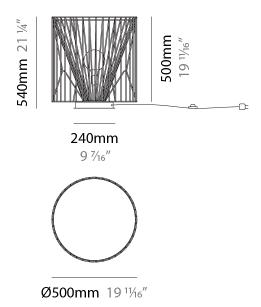






D114031-

PROJECT
ГҮРЕ
SPECIFIER
QUANTITY
DATE

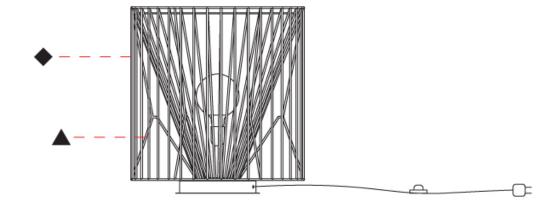






### **MARIOLA**

COLOR FINISH CHART


PROJECT
ТҮРЕ
SPECIFIER
QUANTITY
DATE


#### **Fixture Finish**






























### **Holder Finish**







## **MARIOLA SURFACE, PORTABLE**

COLOR FINISH CHART

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

Accent Finish	
White - WHI	

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.





#### **COLOR FINISH CHART**

PROJECT TYPE NOTES QUANTITY DATE























OLIVE - OLV Pant. 5625	

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens. **Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT		
TYPE		
NOTES		
QUANTITY		
DATE		



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.



PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	











### **MARIOLA**

PROJECT		
TYPE		
SPECIFIER		
QUANTITY		
DATE		

### **LEGEND**

$\downarrow$	floor-mounted	¥	pivotable	*	special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
ラ	wall and ceiling: recessed and surface mounted	S	rotating	0	warm dim / natural dimming LED
1	ceiling-mounted and wall-mounted	Œ	illuminate tilted	0	rechargeable battery powered
$\rightarrow$	wall-mounted	I	color of suspension cable	ill neo	fixture with natural vivid LED (upon request)
Y	omni-directional light distribution	1	length of suspension cable	CRI	color rendering index
Ä	direct light distribution		reflector degree selection	(K)	color temperature
X	direct/indirect light distribution	s s	super spot	(M)	lumen (luminous flux)
Y	indirect light distribution	*	lens	₩	efficacy (lumens per watt)
	asymmetric light distribution	8	lens pack	UGR	Unified Glare Rating (UGR) range from 5-40
A	aura light distribution	0	shine ring	*	marine grade (AISI 316 stainless steel)
R	round wall or ceiling cut-out	0	integrated shine ring with diffuser	30	walk on
Z)	square wall or ceiling cut-out		free individual colors 01-29	<b>②</b>	drive on
4	the supplied jig specifies the cutout dimensions	ē	individual colors: 00 (free of charge), 01-25 (extra charge)	DSC	Dark Sky Compliance
<b>G</b> +.→	minimum distance (meters) lamp - object	<b>♦</b>	luminaire part to be colored (F1)	Ġ	Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
$\hat{\pm}$	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
<b></b>	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
1	ceiling thickness selection		luminaire part to be colored (F4)	<b>(</b> )	acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)	•	luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear	•	color of 3-circuit adaptor		protection class II, protection insulation
8	separately switchable	$\odot$	indirect diffuser	. <b>(1)</b>	ETL Certified to UL and CSA Standards
<b>9</b>	sensor	O	direct diffuser	շ <b>(Մ</b> ) տ	UL Certified to UL and CSA Standards
	remote control	1	ball-proof (upon request)	<b>(1)</b>	CSA Certified to UL and CSA Standards
J	available upon request	0	accessory	<b>Z</b> )	Certified for North American Standards

### **IP RATING**

IP20	protected against ingress of solid bodies greater than 12.5mm (finger)
IP33	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
IP40	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
IP43	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
IP44	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
IP54	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
IP65	protected against ingress of dust protected against jets of water
IP66	protected against ingress of dust protected against powerful jets of water or heavy seas
IP67	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
IP68	protected against ingress of dust protected against immersion of water under pressure for long periods

### **IK RATING**

above the surface)

IK02	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
<b>ІКОЗ</b>	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
IK04	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
IK05	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
1K06	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
IK07	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) $$
IKOB	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
IK09	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)

protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm