

GENERAL
Series: Denis
Brand: Panzeri
Division: Design
Mounting Type: Suspension
Mounting Location: Ceiling
Subcategory: Pendant

PHYSICAL
Shape: Abstract
Diameter (mm): 127
Diameter (in): 5
Height (mm): 279
Height (in): 11
Max. Overall Height (mm): 2279
Max. Overall Height (in): 89 ¾
Light Distribution: Omnidirectional
Weight (kg): 1.63
Weight (lbs): 3.6
Diffuser: Matte White Blown Glass
Fixture Finish: Metallic Gray
Fixture Material: Glass / Aluminum


ELECTRICAL
Number of Lamps: 1
Lamp Type: LED Retrofit
Lamp Shape: G16.5
Bulb Included: Bulb Not Included
Total Output Wattage (W): 7
Max. Wattage Per Lamp (W): 7
Lamp Base: E12
Input Voltage (V): 120

LED

OPTICAL


RATINGS AND CERTIFICATIONS
Certified By: CSA Certified to UL and CSA Standards
IP rating: IP20

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

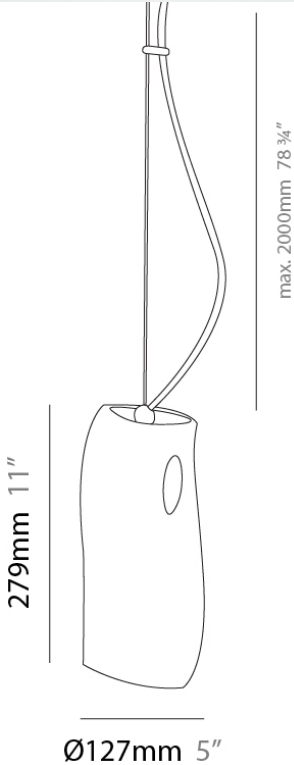


| | |
|---|--|
| GENERAL | |
| Series: Denis | |
| Brand: Panzeri | |
| Division: Design | |
| Mounting Type: Surface | |
| Mounting Location: Wall | |
| Subcategory: Sconce | |
| PHYSICAL | |
| Width (mm): 127 | |
| Width (in): 5 | |
| Height (mm): 381 | |
| Height (in): 15 | |
| Extension (mm): 64 | |
| Extension (in): 2.5 | |
| Diffuser: Matte White Blown Glass | |
| ELECTRICAL | |
| Number of Lamps: 2 | |
| Lamp Type: LED Retrofit / Halogen | |
| Lamp Shape: G16.5 | |
| Bulb Included: Bulb Not Included | |
| Total Output Wattage (W): 12 / 60 | |
| Max. Wattage Per Lamp (W): 12 / 60 | |
| Lamp Base: E12 | |
| Input Voltage (V): 120 | |
| LED | |
| OPTICAL | |
| RATINGS AND CERTIFICATIONS | |
| Certified By: CSA Certified to UL and CSA Standards | |
| IP rating: IP20 | |

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |

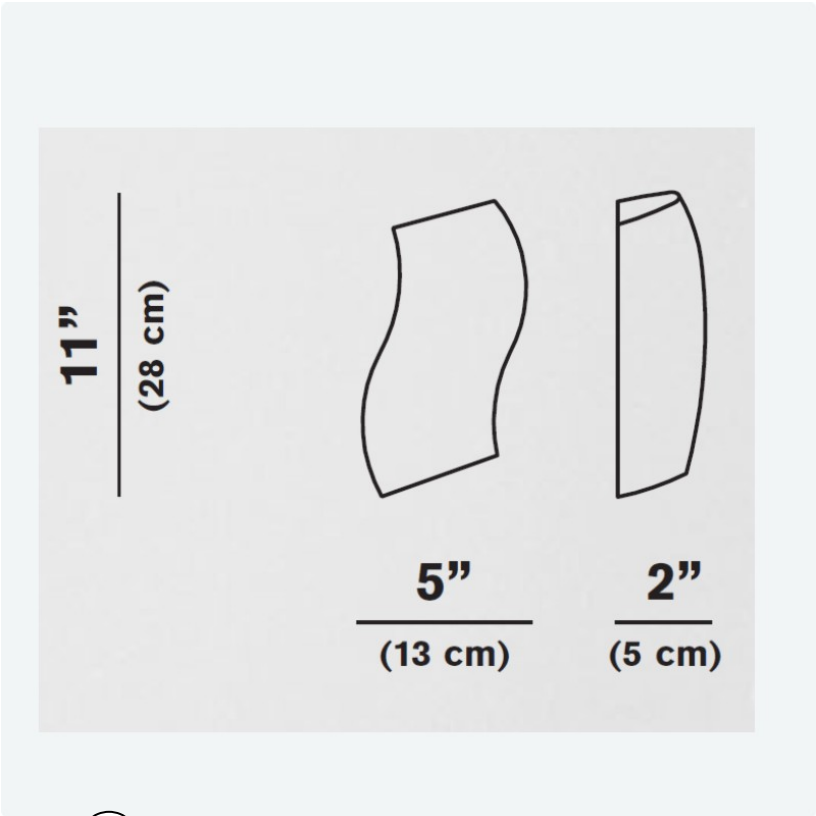

| |
|----------|
| PROJECT |
| TYPE |
| NOTES |
| QUANTITY |
| DATE |



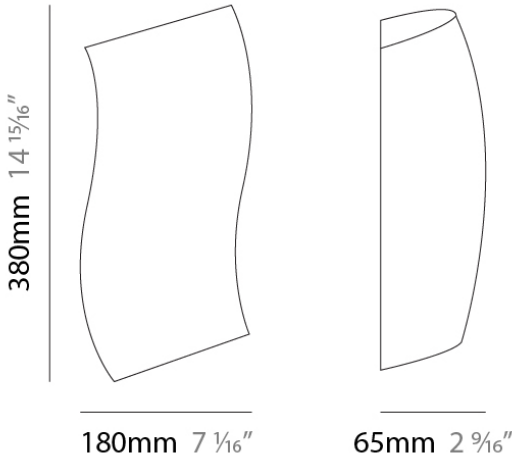







| |
|---|
| GENERAL |
| Series: Denis |
| Brand: Panzeri |
| Division: Design |
| Mounting Type: Surface |
| Mounting Location: Wall |
| Subcategory: Ambient |
| PHYSICAL |
| Shape: Curves |
| Width (mm): 178 |
| Width (in): 7 |
| Height (mm): 380 |
| Depth (mm): 64 |
| Height (in): 15 |
| Depth (in): 2 1/2 |
| Light Distribution: Omnidirectional |
| Weight (kg): 2.04 |
| Weight (lbs): 4.5 |
| Diffuser: Matte White Blown Glass |
| Fixture Material: Glass / Aluminum |
| ELECTRICAL |
| Number of Lamps: 1 |
| Lamp Type: LED Retrofit |
| Lamp Shape: T10 |
| Bulb Included: Bulb Not Included |
| Total Output Wattage (W): 18 |
| Max. Wattage Per Lamp (W): 18 |
| Lamp Base: E26 |
| Input Voltage (V): 120 |
| LED |
| OPTICAL |
| RATINGS AND CERTIFICATIONS |
| Certified By: CSA Certified to UL and CSA Standards |
| IP rating: IP20 |



LEGEND

| | | | | | |
|--|--|---|--|---|--|
|  | floor-mounted |  | pivotal |  | special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+ |
|  | wall and ceiling: recessed and surface mounted |  | rotating |  | warm dim / natural dimming LED |
|  | ceiling-mounted and wall-mounted |  | illuminate tilted |  | rechargeable battery powered |
|  | wall-mounted |  | color of suspension cable |  | fixture with natural vivid LED (upon request) |
|  | omni-directional light distribution |  | length of suspension cable |  | color rendering index |
|  | direct light distribution |  | reflector degree selection |  | color temperature |
|  | direct/indirect light distribution |  | super spot |  | lumen (luminous flux) |
|  | indirect light distribution |  | lens |  | efficacy (lumens per watt) |
|  | asymmetric light distribution |  | lens pack |  | Unified Glare Rating (UGR) range from 5-40 |
|  | aura light distribution |  | shine ring |  | marine grade (AISI 316 stainless steel) |
|  | round wall or ceiling cut-out |  | integrated shine ring with diffuser |  | walk on |
|  | square wall or ceiling cut-out |  | free individual colors 01-29 |  | drive on |
|  | the supplied jig specifies the cutout dimensions |  | individual colors: 00 (free of charge), 01-25 (extra charge) |  | Dark Sky Compliance |
|  | minimum distance (meters) lamp - object |  | luminaire part to be colored (F1) |  | Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor) |
|  | recessed depth |  | luminaire part to be colored (F2) |  | lamp protected against explosion |
|  | ceiling thickness in mm |  | luminaire part to be colored (F3) |  | blown glass using traditional methods by master glass blower |
|  | ceiling thickness selection |  | luminaire part to be colored (F4) |  | acoustic material |
|  | dimmmable DP (phase), DV (0-10V), DD (dali), DS (step-dim) |  | luminaire part to be colored (F5) |  | protection class I, protection insulation |
|  | included or excluded LED driver/transformer/ control gear |  | color of 3-circuit adaptor |  | protection class II, protection insulation |
|  | separately switchable |  | indirect diffuser |  | ETL Certified to UL and CSA Standards |
|  | sensor |  | direct diffuser |  | UL Certified to UL and CSA Standards |
|  | remote control |  | ball-proof (upon request) |  | CSA Certified to UL and CSA Standards |
|  | available upon request |  | accessory |  | Certified for North American Standards |

IP RATING

| | |
|---|--|
|  | protected against ingress of solid bodies greater than 12.5mm (finger) |
|  | protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture |
|  | protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain) |
|  | protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions |
|  | protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions |
|  | protected against ingress of dust protected against jets of water |
|  | protected against ingress of dust protected against powerful jets of water or heavy seas |
|  | protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes |
|  | protected against ingress of dust protected against immersion of water under pressure for long periods |

IK RATING

| | |
|---|---|
|  | protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface) |
|  | protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface) |
|  | protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface) |
|  | protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface) |
|  | protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface) |
|  | protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface) |
|  | protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface) |
|  | protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface) |
|  | protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface) |
|  | protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface) |